

Surface Mount

# Power Splitter/Combiner

2 Way-0° 50Ω 10 to 1000 MHz


## Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.


## Pin Connections

SUMPORT	6
PORT 1	4
PORT 2	3
GROUND	1
NOT USED	2,5

## Outline Drawing

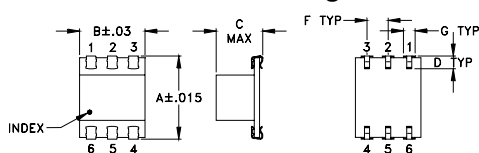

## PCB Land Pattern



Suggested Layout,  
Tolerance to be within ±.002


## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.390	.31	.225	.060	--	.100	.045
9.91	7.87	5.72	1.52	--	2.54	1.14

H	J	K	L	M	wt
.420	.120	.060	.100	--	grams
10.67	3.05	1.52	2.54	--	0.50

## Demo Board MCL P/N: TB-94 Suggested PCB Layout (PL-058)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Features

- low insertion loss, 0.4 dB typ.
- high isolation, 23 dB typ.
- aqueous washable
- J-leads for strain relief and excellent solderability

## Applications

- cellular
- instrumentation
- communications systems




## Splitter Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 3.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L		M		U	
f <sub>L</sub> -f <sub>U</sub>	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
10-1000	25	20	23	16	19	14	0.3	0.5	0.4	0.9	0.8	1.5	1.0	3.0	5.0	0.15	0.2	0.4

L = 10-100 MHz M = 100-500 MHz U = 500-1000 MHz

## Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
10.00	3.31	3.31	0.00	39.33	0.01	1.04	1.11	1.11
47.69	3.31	3.31	0.00	36.50	0.16	1.04	1.10	1.10
85.38	3.34	3.33	0.00	32.39	0.27	1.06	1.10	1.10
160.77	3.39	3.38	0.00	27.60	0.51	1.12	1.11	1.11
236.15	3.44	3.43	0.01	24.93	0.73	1.17	1.12	1.13
349.23	3.52	3.51	0.01	22.30	1.04	1.24	1.14	1.15
424.62	3.58	3.56	0.02	21.10	1.22	1.29	1.16	1.16
500.00	3.65	3.61	0.03	20.23	1.39	1.33	1.17	1.18
541.67	3.69	3.65	0.04	19.87	1.47	1.34	1.17	1.18
625.00	3.76	3.70	0.06	19.39	1.62	1.37	1.18	1.19
708.33	3.83	3.74	0.09	19.28	1.76	1.38	1.17	1.18
791.67	3.90	3.78	0.12	19.59	1.82	1.37	1.16	1.16
875.00	3.98	3.82	0.16	20.38	1.86	1.34	1.14	1.13
958.33	4.08	3.86	0.22	21.87	1.88	1.27	1.11	1.09
1000.00	4.14	3.89	0.25	22.95	1.88	1.23	1.10	1.07

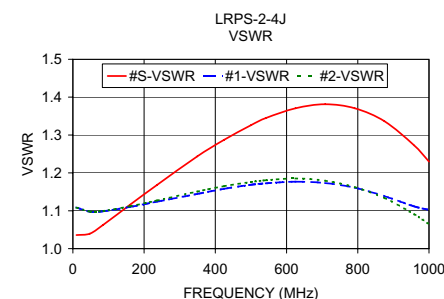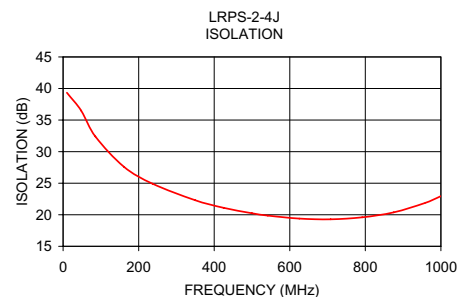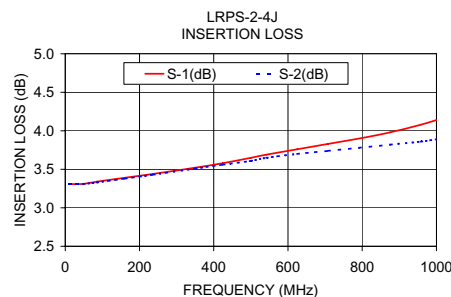

## electrical schematic



**Mini-Circuits®**

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>



REV. C  
M102713  
LRPS-2-4J  
ED-1535  
DJ/TD/CP  
060914



CASE STYLE: QQQ569

PRICE: \$19.95 ea. QTY. (10-49)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.