

Surface Mount Power Splitter/Combiner

3 Way-0° 50Ω 10 to 300 MHz

LRPS-3-1+
LRPS-3-1




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.375W max.


Pin Connections

SUMPORT	6
PORT 1	1
PORT 2	2
PORT 3	3
GROUND	4,5

Outline Drawing

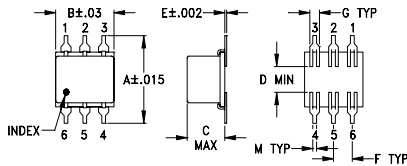

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.400	.31	.200	.10	.010	.100	.050
10.16	7.87	5.08	2.54	0.25	2.54	1.27
H	J	K	L	M		wt
.420	.120	.060	.100	.020		grams
10.67	3.05	1.52	2.54	0.51		0.55

Demo Board MCL P/N: TB-225 Suggested PCB Layout (PL-170)

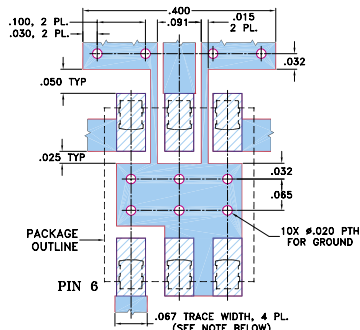

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low insertion loss, 0.3 dB typ.
- good isolation, 25 dB typ.

Applications

- VHF/UHF
- defense & federal communications

CASE STYLE: QQQ130

PRICE: \$19.95 ea. QTY. (1-9)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.




Splitter Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 4.8 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L			L		
	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
10-300	25	20	25	20	25	20	0.2	0.6	0.3	0.8	0.5	1.2	2	3	4	0.1	0.3	0.7


L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3
	S-1	S-2	S-3		1-2	1-3	2-3					
10.00	5.09	5.10	5.10	0.01	25.23	25.70	25.35	0.12	1.29	1.08	1.09	1.08
20.00	5.09	5.10	5.10	0.01	25.12	25.56	25.20	0.21	1.27	1.06	1.07	1.07
30.00	5.09	5.10	5.10	0.01	24.91	25.32	24.94	0.31	1.26	1.06	1.06	1.06
45.00	5.09	5.10	5.10	0.01	24.63	25.03	24.63	0.42	1.25	1.05	1.06	1.06
60.00	5.10	5.12	5.11	0.01	24.44	24.82	24.38	0.58	1.25	1.05	1.06	1.06
75.00	5.12	5.13	5.13	0.01	24.26	24.64	24.15	0.69	1.25	1.05	1.05	1.06
90.00	5.13	5.14	5.14	0.01	24.12	24.53	23.97	0.82	1.24	1.05	1.05	1.06
110.00	5.15	5.17	5.17	0.01	23.97	24.38	23.75	1.00	1.24	1.05	1.05	1.06
140.00	5.20	5.21	5.21	0.02	23.85	24.26	23.52	1.18	1.23	1.05	1.05	1.06
180.00	5.26	5.28	5.27	0.02	23.91	24.29	23.41	1.48	1.21	1.04	1.04	1.06
210.00	5.31	5.33	5.31	0.02	24.17	24.50	23.53	1.70	1.19	1.04	1.04	1.06
240.00	5.37	5.40	5.38	0.03	24.72	24.91	23.89	1.84	1.16	1.05	1.04	1.06
270.00	5.44	5.47	5.44	0.03	25.65	25.60	24.56	2.00	1.12	1.06	1.05	1.06
290.00	5.49	5.52	5.49	0.03	26.59	26.28	25.26	2.06	1.10	1.07	1.05	1.06
300.00	5.53	5.55	5.52	0.04	27.22	26.71	25.71	2.09	1.09	1.07	1.06	1.06

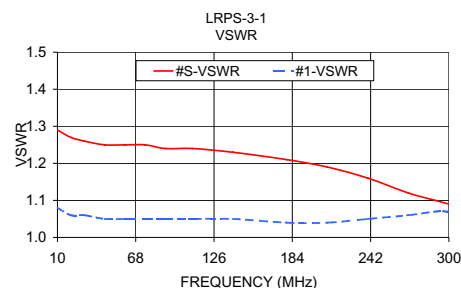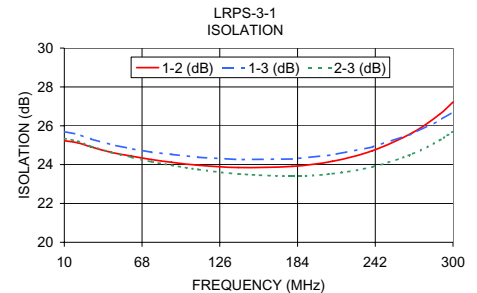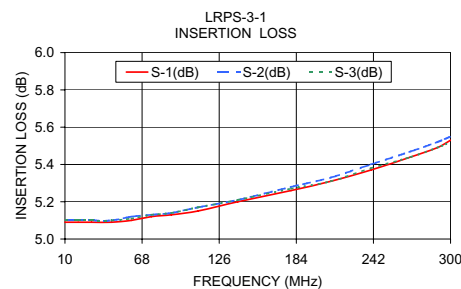

electrical schematic

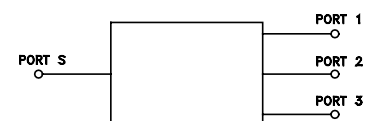

Mini-Circuits®

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>



REV. C
M102713
LRPS-3-1
DJ/TD/CP
060901