

Surface Mount Power Splitter/Combiner

3 Way-0° 50Ω 10 to 300 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.375W max.


Pin Connections

SUMPORT	6
PORT 1	1
PORT 2	2
PORT 3	3
GROUND	4,5

Outline Drawing

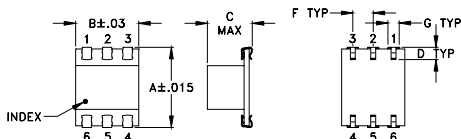

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±0.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.390	.31	.225	.060	--	.100	.045
9.91	7.87	5.72	1.52	--	2.54	1.14
H	J	K	L	M	wt	
.420	.120	.060	.100	--	grams	
10.67	3.05	1.52	2.54	--	0.50	

Demo Board MCL P/N: TB-225

Suggested PCB Layout (PL-170)

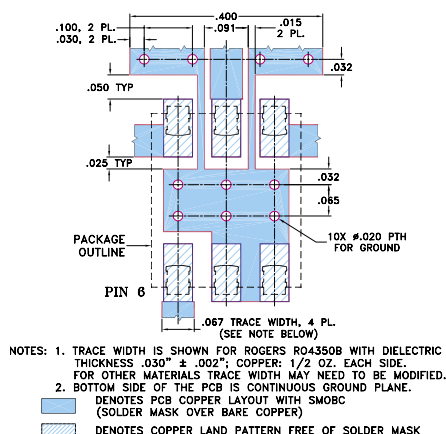

Features

- low insertion loss, 0.3 dB typ.
- good isolation, 25 dB typ.
- aqueous washable
- J-leads for strain relief & excellent solderability

Applications

- VHF
- defense & federal communications

LRPS-3-1J+
LRPS-3-1J



CASE STYLE: QQQ569

PRICE: \$19.95 ea. QTY. (1-9)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.




Splitter Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 4.8 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L			L		
	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
10-300	25	20	25	20	25	20	0.2	0.6	0.3	0.8	0.5	1.2	2	3	4	0.1	0.3	0.7


L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3
	S-1	S-2	S-3		1-2	1-3	2-3					
10.00	5.09	5.10	5.10	0.01	25.23	25.70	25.35	0.12	1.29	1.08	1.09	1.08
20.00	5.09	5.10	5.10	0.01	25.12	25.56	25.20	0.21	1.27	1.06	1.07	1.07
30.00	5.09	5.10	5.10	0.01	24.91	25.32	24.94	0.31	1.26	1.06	1.06	1.06
45.00	5.09	5.10	5.10	0.01	24.63	25.03	24.63	0.42	1.25	1.05	1.06	1.06
60.00	5.10	5.12	5.11	0.01	24.44	24.82	24.38	0.58	1.25	1.05	1.06	1.06
75.00	5.12	5.13	5.13	0.01	24.26	24.64	24.15	0.69	1.25	1.05	1.05	1.06
90.00	5.13	5.14	5.14	0.01	24.12	24.53	23.97	0.82	1.24	1.05	1.05	1.06
110.00	5.15	5.17	5.17	0.01	23.97	24.38	23.75	1.00	1.24	1.05	1.05	1.06
140.00	5.20	5.21	5.21	0.02	23.85	24.26	23.52	1.18	1.23	1.05	1.05	1.06
180.00	5.26	5.28	5.27	0.02	23.91	24.29	23.41	1.48	1.21	1.04	1.04	1.06
210.00	5.31	5.33	5.31	0.02	24.17	24.50	23.53	1.70	1.19	1.04	1.04	1.06
240.00	5.37	5.40	5.38	0.03	24.72	24.91	23.89	1.84	1.16	1.05	1.04	1.06
270.00	5.44	5.47	5.44	0.03	25.65	25.60	24.56	2.00	1.12	1.06	1.05	1.06
290.00	5.49	5.52	5.49	0.03	26.59	26.28	25.26	2.06	1.10	1.07	1.05	1.06
300.00	5.53	5.55	5.52	0.04	27.22	26.71	25.71	2.09	1.09	1.07	1.06	1.06

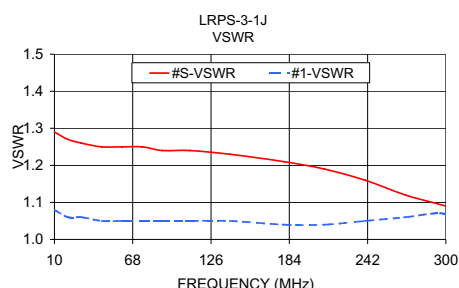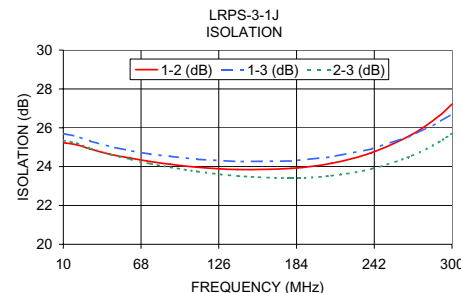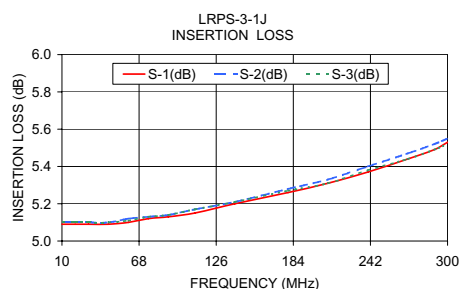

electrical schematic

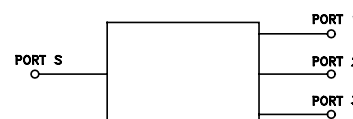

Mini-Circuits®

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



REV. C
M102713
LRPS-3-1J
DJ/TD/CP
060901