

Surface Mount Power Splitter/Combiner

3 Way-0° 50Ω 500 to 850 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.375W max.


Pin Connections

SUMPORT	6
PORT 1	1
PORT 2	2
PORT 3	3
GROUND	4,5

Outline Drawing

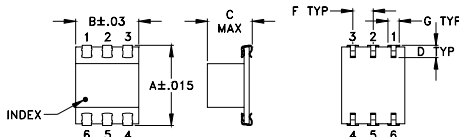

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±0.02

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.390	.31	.225	.060	--	.100	.045
9.91	7.87	5.72	1.52	--	2.54	1.14
H	J	K	L	M	wt	
.420	.120	.060	.100	--	grams	
10.67	3.05	1.52	2.54	--	0.50	

Demo Board MCL P/N: TB-225 Suggested PCB Layout (PL-170)

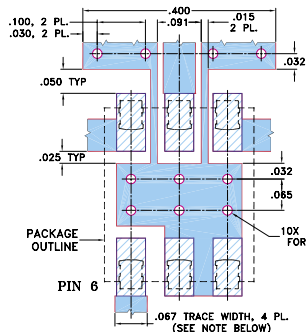

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low insertion loss, 0.7 dB typ.
- good isolation, 23 dB typ.
- aqueous washable
- J-leads for strain relief & excellent solderability

Applications

- UHF
- communication systems



CASE STYLE: QQQ569

PRICE: \$16.95 ea. QTY. (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)




The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Splitter Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 4.8 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
$f_L - f_U$	Typ.	Min	Typ.	Max.	Max.	Max.
500-850	23	16	0.7	1.6	8	0.9

Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR			
	S-1	S-2	S-3		1-2	1-3	2-3		S	1	2	3
500.00	5.31	5.24	5.30	0.08	22.65	21.54	22.09	0.35	1.43	1.35	1.30	1.35
520.00	5.32	5.26	5.30	0.07	23.03	21.90	22.41	0.29	1.42	1.34	1.29	1.34
540.00	5.30	5.24	5.29	0.06	23.44	22.28	22.73	0.40	1.40	1.33	1.28	1.32
570.00	5.31	5.26	5.30	0.05	24.18	22.94	23.24	0.45	1.38	1.32	1.27	1.31
600.00	5.34	5.30	5.32	0.05	25.09	23.70	23.79	0.54	1.35	1.31	1.26	1.29
630.00	5.35	5.31	5.32	0.03	26.20	24.60	24.38	0.69	1.31	1.30	1.25	1.27
655.00	5.35	5.33	5.32	0.03	27.35	25.46	24.93	0.79	1.28	1.30	1.24	1.26
670.00	5.37	5.36	5.33	0.04	28.21	26.08	25.26	0.88	1.26	1.29	1.24	1.25
685.00	5.39	5.37	5.34	0.05	29.25	26.76	25.62	0.99	1.24	1.29	1.23	1.25
700.00	5.40	5.41	5.36	0.05	30.46	27.58	25.97	1.10	1.22	1.29	1.23	1.24
730.00	5.44	5.45	5.39	0.06	33.85	29.49	26.65	1.39	1.19	1.28	1.23	1.23
770.00	5.52	5.56	5.45	0.11	41.96	33.24	27.20	1.76	1.16	1.28	1.23	1.21
810.00	5.65	5.72	5.55	0.17	35.11	36.31	26.71	2.31	1.18	1.29	1.24	1.20
840.00	5.80	5.89	5.66	0.23	29.55	33.17	25.47	2.69	1.25	1.31	1.26	1.20
850.00	5.83	5.95	5.69	0.25	28.14	31.70	24.92	2.83	1.29	1.32	1.27	1.20

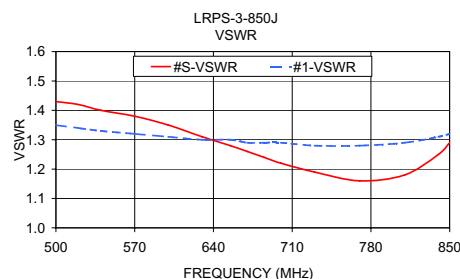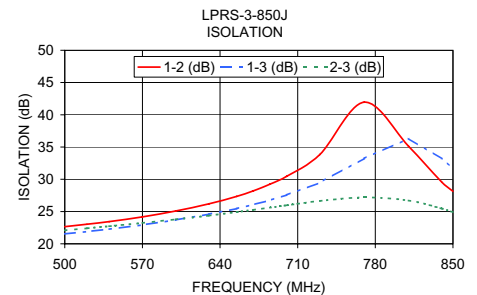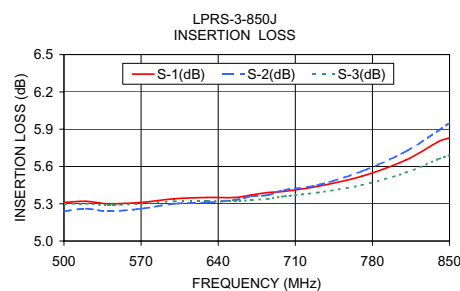

electrical schematic

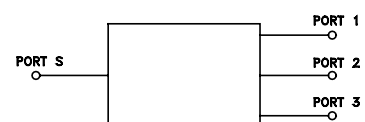

Mini-Circuits®

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



REV. B
M98898
LRPS-3-850J
DJ/TD/CP
060901