

Coaxial

# Low Pass Filter

50Ω DC to 81 MHz

## Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

## Features

- rugged shielded case
- other NLP models available with wide selection of cut-off frequencies

## Applications

- lab use
- test equipment
- video equipment

NLP-90+  
NLP-90+

CASE STYLE: FF57

Connectors	Model	Price	Qty.
N-Type	NLP-90(+)	\$35.95 ea.	(1-9)


+ RoHS compliant in accordance  
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site  
for RoHS Compliance methodologies and qualifications.

## Low Pass Filter Electrical Specifications


PASSBAND (MHz)	fco (MHz) Nom.	STOPBAND (MHz)		VSWR (:1)	
(loss < 1 dB)	(loss 3 dB)	(loss > 20 dB)	(loss > 40 dB)	Passband Typ.	Stopband Typ.
DC-81	90	121-157	157-400	1.7	18

## Outline Drawing

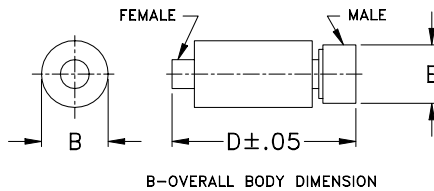


B—OVERALL BODY DIMENSION

## typical frequency response





## electrical schematic



## Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	$\bar{x}$	$\sigma$			
1.00	0.05	0.1	42.0	1.00	9.672
12.50	0.14	0.1	37.5	12.50	9.503
24.00	0.18	0.1	27.7	24.00	9.491
35.50	0.31	0.1	18.7	35.50	9.776
46.50	0.42	0.1	14.9	46.50	10.240
58.00	0.43	0.1	16.1	58.00	11.244
81.00	0.69	0.1	17.0	81.00	15.573
87.00	1.28	0.4	9.7	84.00	17.894
90.00	2.01	0.5	7.6	87.00	19.997
93.00	6.43	0.9	3.8	90.00	24.263
97.00	8.74	1.0	1.7	93.00	21.734
104.01	12.94	1.1	0.8	97.00	17.532
111.00	16.72	1.2	0.5	104.00	15.893
115.52	21.91	1.2	0.1	111.00	12.218
121.03	26.16	1.2	0.2	115.50	5.804
130.03	32.40	1.3	0.3	121.00	5.229
140.04	38.50	1.4	0.3	130.00	3.892
145.04	41.31	1.4	0.3	135.00	2.740
150.04	43.98	1.5	0.3	140.00	0.487
155.05	46.76	1.7	0.3	145.00	0.841
157.05	47.69	1.8	0.3	150.00	2.060
184.06	60.11	2.9	0.3	155.00	7.687
206.57	66.87	1.4	0.3	157.00	5.680
229.58	75.03	5.6	0.2	184.00	5.380
252.57	74.83	7.6	0.2	195.50	5.060
298.08	76.96	7.1	0.1	206.50	4.740
321.08	75.07	4.9	0.1	218.00	4.320
355.57	73.10	4.4	0.1	229.50	4.010
378.08	75.50	4.8	0.1	241.00	3.760
400.07	74.56	6.3	0.1	252.50	3.450

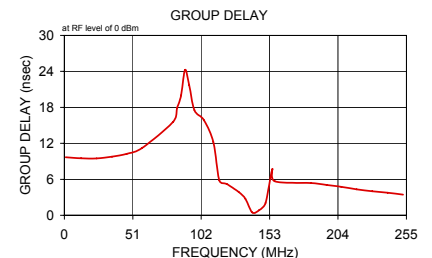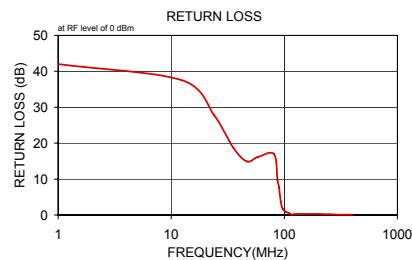

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 &amp; ISO 14001 Certified

REV. A  
M98898  
NLP-90  
060718