

# Low Pass Filter

PBLP-467

50Ω Flat Time Delay DC to 280 MHz

## Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

## Pin Connections

INPUT	1
OUTPUT	8
GROUND	2,3,4,5,6,7
CASE GROUND	2,3,4,5,6,7
DEMO BOARD	TB-305

## Features

- flat group delay for low pulse distortion
- rugged shielded case, hermetic
- other PBLP models available with wide selection of cut-off frequencies

## Applications

- linear modulation techniques
- voice transmission applications
- digital communications




CASE STYLE: A01  
PRICE: \$22.20 ea. QTY: 1-9

## Low Pass Filter Electrical Specifications

PASSBAND (MHz)	fco, MHz Nom.	STOPBAND (MHz)		VSWR (:1)		GROUP DELAY VARIATION (nsec)		
		(loss > 10 dB)	(loss > 20 dB)	DC-0.2fco	DC-0.6fco	DC-fco	DC-2fco	DC-2.67fco
(loss < 1.2 dB) Min.	(loss 3 dB)			$\bar{X}$	$\bar{X}$	$\bar{X}$	$\bar{X}$	$\bar{X}$
DC-280	467	934-1246	1246	1.25:1	2.2:1	0.15	0.4	0.55

## Outline Drawing

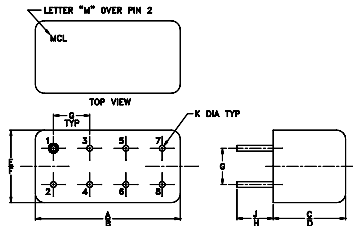


NOTE: BLUE BEAD INDICATES PIN 1.  
PIN NUMBERS DO NOT APPEAR ON UNIT,  
FOR REFERENCE ONLY.


## Outline Dimensions (inch/mm)

A	B	C	D	E	F
.770	.800	.385	.400	.370	.400
19.56	20.32	9.78	10.16	9.40	10.16
G	H	J	K	wt	
.200	.20	.14	.031		grams
5.08	5.08	3.56	0.79		5.2


TYPICAL GROUP DELAY



TYPICAL FREQUENCY RESPONSE



electrical schematic

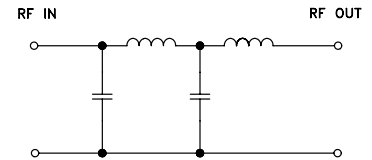

## Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	$\bar{X}$	$\sigma$			
10.0	0.07	0.1	36.0	10.0	0.963
100.0	0.18	0.1	17.3	55.0	1.041
145.0	0.28	0.1	14.2	100.0	1.016
190.0	0.42	0.1	11.8	145.0	0.994
235.0	0.61	0.1	10.0	190.0	1.118
280.0	0.85	0.1	8.5	235.0	1.085
300.0	0.98	0.1	7.9	280.0	1.088
412.0	2.01	0.1	5.2	300.0	1.042
467.0	2.72	0.1	4.2	357.5	1.083
500.0	3.19	0.2	3.6	412.5	1.043
625.0	5.57	0.2	2.1	467.0	1.010
750.0	8.71	0.3	1.1	500.0	1.180
810.0	10.34	0.4	0.9	562.5	1.017
872.0	12.19	0.4	0.7	625.0	1.017
934.0	14.02	0.5	0.6	687.5	1.110
1000.0	15.94	0.5	0.5	750.0	1.055
1072.5	18.12	0.6	0.5	810.0	0.762
1142.5	20.11	0.7	0.5	872.5	1.030
1177.5	21.14	0.7	0.4	934.0	0.736
1212.5	22.15	0.7	0.4	1000.0	0.572
1246.0	23.12	0.8	0.4	1037.5	0.663
1300.0	24.56	0.8	0.5	1072.5	0.675
1417.5	27.75	0.9	0.5	1107.5	0.659
1535.0	30.82	1.0	0.5	1142.5	0.722
1650.0	33.70	1.1	0.6	1177.5	0.551
1767.5	36.46	1.2	0.7	1212.5	0.679
1825.0	37.83	1.5	0.7	1246.0	0.558
1885.0	39.23	1.6	0.7	1300.0	0.668
1942.5	40.45	1.6	0.7	1360.0	0.781
2000.0	41.59	1.8	0.8	1417.5	0.573

