


2 Way-90° 0.42 MHz to 1875 MHz



PSCQ-2 / PQW-2

MODEL NO.	FREQ. RANGE MHz f_L - f_U	ISOLATION dB		INSERTION LOSS, dB Avg. of Coupled Outputs less 3 dB		PHASE UNBALANCE Degrees Max.	AMPLITUDE UNBALANCE dB Max.	CASE STYLE Note B	CONNECTION	PRICE \$ Qty. (1-9)
		Typ.	Min.	Typ.	Max.					
PQW-2-90	30-90	27	20	0.3	0.6	3	1.0	A01	gy	29.95
PQW-2-270	90-270	20	17	0.4	0.7	4	1.4	A01	gy	31.95
PSCQ-2-0.455	0.42-0.51	30	25	0.1	0.5	3	1.2	A01	aw	27.95
PSCQ-2-1.25	1.13-1.38	29	25	0.4	0.7	3	1.2	A01	aw	15.95
PSCQ-2-3.4	3.0-3.8	30	25	0.4	0.7	3.8	1.2	A01	aw	21.95
PSCQ-2-4	3.5-4.5	36	25	0.4	0.7	3	1.5	A01	aw	15.95
PSCQ-2-7.5	7-8	35	25	0.4	0.7	3	1.2	A01	aw	15.95
PSCQ-2-8	2-8	36	27	0.3	0.7	6	0.5	A01	gx	51.95
PSCQ-2-10.5	9-11	25	20	0.4	0.7	3	1.2	A01	aw	15.95
PSCQ-2-13	12-14	29	25	0.4	0.7	3	1.2	A01	aw	15.95
PSCQ-2-14	12-16	30	25	0.3	0.6	3	1.8	A01	aw	21.95
PSCQ-2-21.4	20-23	30	25	0.4	0.7	3	1.2	A01	aw	15.95
PSCQ-2-26	14-30	25	20	0.4	0.7	3	1.5	A01	aw	25.95
PSCQ-2-32	3.2-32	32	25	0.4	0.8	5	0.4	A01	gx	91.95
PSCQ-2-40	23-40	21	18	0.3	0.7	3	1.5	A01	aw	21.95
PSCQ-2-50	25-50	30	20	0.3	0.7	3	1.5	A01	aw	25.95
PSCQ-2-70	40-70	30	20	0.3	0.7	3	1.5	A01	aw	25.95
PSCQ-2-70N	66-74	22	19	0.2	0.5	0.8	0.25	A01	aw	25.95
PSCQ-2-85A	55-85	35	20	0.3	0.6	3	0.6	A01	ax	26.95
PSCQ-2-90	55-90	30	20	0.3	0.7	3	1.2	A01	aw	25.95
PSCQ-2-120	80-120	25	18	0.3	0.7	3	1.5	A01	aw	25.95
PSCQ-2-160	100-160	24	19	0.3	0.7	3	1.5	A01	aw	25.95
PSCQ-2-180	120-180	23	15	0.3	0.7	4	1.2	A01	aw	25.95
PSCQ-2-250	150-250	30	22	0.4	0.8	4	1.5	A01	aw	25.95
PSCQ-2-400	250-400	23	16	0.5	0.9	4	1.5	A01	aw	25.95
PSCQ-2-450	350-450	23	16	0.5	0.9	5	1.5	A01	aw	25.95
PSCQ-2-550	450-550	19	15	0.4	0.7	5	1.5	A01	aw	25.95
PSCQ-2-1000	800-1000	27	20	0.28	0.6	3	1.3	A05	ax	27.95


NOTES:

- ◆ Aqueous washable. For non-aqueous requirements, LRPQ units available in case style QQQ130.
- Non-hermetic
- * Protected under U.S. patent 6133525
- ** LRPQ units have bottom barrier ground plane insulated with glass barrier.
- A. General Quality Control Procedures, Environmental Specifications, Hi-Rel and MIL description are given in "Mini-Circuits Guarantees Quality" article.
- B. For details on Connector types, case mounted options, case finishes see "Case styles & Outline Drawings".
- C. Prices and specifications subject to change without notice.
- 1. Absolute maximum power, voltage and current ratings:
 - 1a. Matched power rating
 models PSCQ-2-8, PSCQ-2-32 50mWatt
 models SCPO-10.5, ADQ-90, ADQ-180 ... 0.5 Watt
 all other models 1Watt
 - 1b. Internal load dissipation 0.125 Watt

NSN GUIDE

MCL NO.	NSN
PSCQ-2-21.4	6625-01-415-3074
PSCQ-2-180	6625-01-186-4456
PSCQ-2-90	6625-01-160-0151
PSCQ-2-70	5985-01-292-8834
PSCQ-2-50	5895-01-374-0023
PSCQ-2-550	5895-01-347-0206

Surface Mount

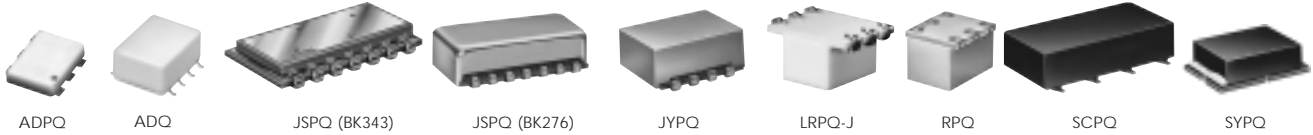

MODEL NO.	FREQ. RANGE MHz f_c - f_u	ISOLATION dB		INSERTION LOSS, dB Avg. of Coupled Outputs less 3 dB		PHASE UNBALANCE Degrees Max.	AMPLITUDE UNBALANCE dB Max.	CASE STYLE Note B	CONNECTION PL-	PCB Lay-out PL-	PRICE \$ Qty. (1-9)
		Typ.	Min.	Typ.	Max.						
◆ ADPQ-2-250*	150-250	24	17	0.2	0.7	4	1.4	CD637	ay		9.95
NEW ◆ ADQ-90*	55-90	26	20	0.2	0.7	4	1.2	CJ725	nf	063	6.95
NEW ◆ ADQ-180*	120-180	35	20	0.2	0.7	6	1.5	CJ725	nf	063	6.95
◆ JSPQ-80	10-80	44	30	0.45	1.4	6	0.6	BK276	mq	099	19.95
◆ JSPQ-350	150-350	20	13	0.5	1.0	5	1.5	BK276	lu	061	14.95
◆ JSPQ-1875W	1325-1875	28	18	0.2	0.5	6	1.0	BK343	ja	102	17.95
◆ JSPQW-100	40-100	24	18	0.2	0.6	3	1.2	BK276	hm	098	14.95
◆ JSPQW-100A	30-100	41	30	0.5	1.1	4	0.6	BK276	mq	099	19.95
JYPQ-16	10-16	43	25	0.2	0.6	4	0.9	BJ293	kx	100	19.95
JYPQ-30	16-30	28	20	0.2	0.7	3	1.5	BJ293	kx	100	14.95
JYPQ-160	105-160	24	17	0.25	0.6	3	1.5	BJ293	kx	100	14.95
◆ LRPQ-70J**	65-75	30	20	0.1	0.5	3	1	QQQ569	ay		9.95
◆ LRPQ-320J**	270-320	21	18	0.3	0.6	3	1.2	QQQ569	lr		10.95
◆ LRPQ-700J**	500-700	23	18	0.2	0.6	3	1.8	QQQ569	ay		9.95
RPQ-820	760-860	22	15	0.15	0.7	4	1	TT240	gp	111	13.95
RPQ-1495	1400-1600	18	14	0.3	0.8	5	1	TT240	gp	111	15.95
SCPQ-10.5	9-11	31	20	0.15	0.7	3	1.2	YY101	aw	062	13.95
SCPQ-21.4	20-23	32	25	0.15	0.5	2.5	1	YY101	aw	062	13.95
SCPQ-50	25-50	25	20	0.15	0.7	3	1.5	YY101	aw	062	14.95
SCPQ-60	30-60	30	20	0.15	0.7	3	1.5	YY101	aw	062	14.95
SCPQ-85C	55-85	30	20	0.3	0.6	3	0.6	YY101	gy	062	14.95
SCPQ-90	55-90	26	20	0.2	0.7	3	1.2	YY101	aw	062	13.95
SCPQ-150	95-150	22	18	0.3	0.7	3	1.2	YY101	aw	062	14.95
SCPQ-180	120-180	20	16	0.3	0.7	3	1.2	YY161	aw	062	13.95
SCPQ-400	250-400	20	16	0.3	0.7	3	1.2	YY161	aw	062	14.95
SYPQ-70	65-75	31	24	0.1	0.4	3	1.1	AH202	av		13.95

pin connections see case style outline drawings

PORT	av	aw	ax	ay	gp	gx	gy	hm	ja	kx	lu	lr	mq	nf
SUM PORT	1	1	1	6	4	1	1	9	1	8	1	1	1	1
PORT 1	5	2	2	4	1	2	2(0°)	2(0°)	8	1	3(0°)	3	7	8
PORT 2	8	5	8	1	3	5	6(90°)	6(90°)	14	4	12(90°)	6	8	4
GND EXT.	2,3,6,7	3,4,7,8	3,4,5,6 3,5,6	2,5	2,5	3,4,7,8	3,4,7,8	1,3,4,5,7,8 10,11,12,14	2,3,4,5,6,9 10,11,12,13	2,3,6,7	5,7,8,10	2,5	2,3,4,5,6,9 10,11,12,13,14	2,3,6,7
50 OHM TERM.	4	6	7	3	6	—	5	13	7	5	14	4	—	5
NOT USED	—	—	—	—	—	—	—	—	—	—	2,4,6,9,11,13	—	—	—
DEMO BOARD	—	TB-51	—	—	TB-210	—	—	TB-212	TB-214	TB-216	TB-59	—	TB-217	TB-83



The Design Engineers Search Engine
Provides Actual Data Instantly
At: <http://www.minicircuits.com>

In Stock... Immediate Delivery
For Custom Versions Of Standard Models
Consult Our Applications Dept.

