

# Surface Mount Frequency Mixer

Level 13 (LO Power +13 dBm) 5 to 2500 MHz

**RMS-25MH+**  
**RMS-25MH**




## Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA

## Pin Connections

LO	1
RF	4
IF	5
GROUND	2,3,6


## Outline Drawing

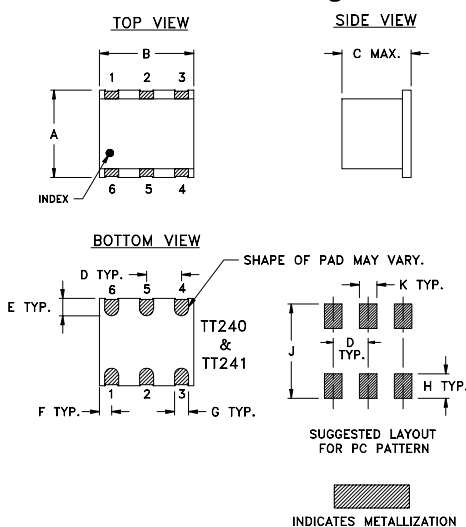

## Outline Dimensions (inch mm)

A	B	C	D	E	F
.250	.31	.20	.100	.050	.055
6.35	7.87	5.08	2.54	1.27	1.40
G	H	J	K		wt
.040	.070	.270	.050		grams
1.02	1.78	6.86	1.27		0.50

## Demo Board MCL P/N: TB-03 Suggested PCB Layout (PL-052) "w" loc. of pin 1 applies.

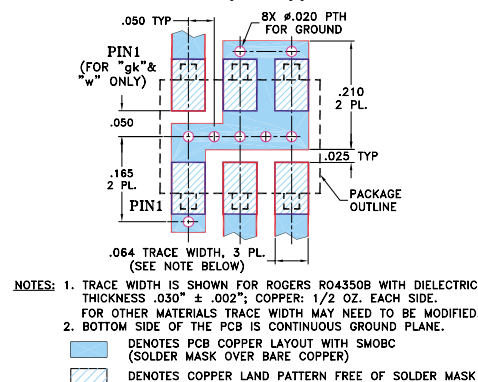

## Features

- excellent L-R isolation, 32 dB typ.
- conversion loss, 7.0 dB typ.
- small size, 0.25"x0.31"x0.2"

## Applications

- cellular
- satellite distribution
- GPS

CASE STYLE: TT240  
PRICE: \$9.95 ea. QTY (1-9)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

## Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3 at center band (dBm)
LO/RF	IF					L		M		U		L		M		U		
f <sub>L</sub> -f <sub>U</sub>		$\overline{X}$	$\sigma$	Max.	Total Range Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.
5-2500	5-1500	7.0	.20	8.5	9.8	54	28	32	23	32	20	34	23	32	25	28	17	17

1 dB COMP: +9 dBm typ.

For phase detection, DC output positive with in-phase RF & LO.

L = low range [f<sub>L</sub> to 10 f<sub>L</sub>]

m = mid band [2f<sub>L</sub> to f<sub>U</sub>/2]


M = mid range [10 f<sub>L</sub> to f<sub>U</sub>/2]

U = upper range [f<sub>U</sub>/2 to f<sub>U</sub>]

## Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +13 dBm	LO +13 dBm	LO +13 dBm	LO +13 dBm	LO +13 dBm
5.00	35.00	6.60	43.66	31.16	1.43	2.14
10.10	40.10	6.47	48.02	33.66	1.42	2.07
20.18	50.18	6.42	53.20	34.80	1.42	2.09
33.51	63.51	6.47	56.82	34.60	1.42	2.09
49.03	79.03	6.46	59.20	34.63	1.42	2.08
81.42	111.42	6.50	57.10	34.59	1.42	2.06
135.23	165.23	6.58	52.43	34.78	1.45	2.08
224.60	194.60	6.60	46.08	35.72	1.52	2.08
373.01	343.01	6.77	40.43	37.11	1.71	1.95
480.71	450.71	6.88	38.16	36.46	1.86	1.92
545.72	515.72	6.82	37.54	35.91	1.95	1.80
798.38	768.38	6.92	36.87	32.89	2.23	1.71
906.34	876.34	6.92	37.27	31.38	2.32	1.62
1168.03	1138.03	7.19	36.90	30.53	2.35	1.61
1250.00	1220.00	7.10	38.52	31.35	2.37	1.62
1505.28	1475.28	6.78	39.76	30.96	2.27	1.65
1800.00	1770.00	6.85	31.84	27.67	2.24	1.57
2000.00	1970.00	7.07	28.62	28.09	2.19	1.62
2200.00	2170.00	7.09	25.62	28.13	2.18	1.77
2500.00	2470.00	7.52	22.96	26.44	1.95	1.99

## Electrical Schematic

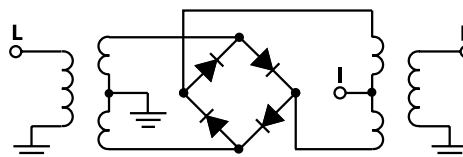

**Mini-Circuits®**

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



REV. A  
M98898  
RMS-25MH  
060517  
Page 1 of 2

## Performance Charts

