

# Voltage Controlled Oscillator

## ROS-1900+ ROS-1900


### Linear Tuning 1450 to 1900 MHz

#### Features

- wide frequency range, 1450-1900 MHz
- low phase noise, -106 dBc/Hz at 10 kHz offset, typ
- linear tuning, 22-34 MHz/V typ.
- wide modulation bandwidth, 100 MHz typ.
- aqueous washable

#### Applications

- instrumentation
- PCN



CASE STYLE: CK605

PRICE: \$17.95 ea. QTY (5-49)

**+ RoHS compliant in accordance  
with EU Directive (2002/95/EC)**

See our web site for RoHS Compliance methodologies and qualifications.

#### Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	TUNING VOLTAGE (V)		PHASE NOISE dBc/Hz SSB at offset frequencies: Typ.				PULLING pk-pk @ 12 dB (MHz)	PUSHING (MHz/V)	TUNING SENSITIVITY (MHz/V)	HARMONICS (dBc)		3 dB MODULATION BANDWIDTH (MHz)	DC OPERATING POWER	
	Min.	Max.		Min.	Max.	1 kHz	10 kHz	100 kHz	1 MHz				Typ.	Max.		Vcc (volts)	Current (mA)
ROS-1900(+)	1450	1900	7.0	0.5	20	-80	-106	-126	-146	7	0.7	22-34	-15	-7	100	10	25

#### Pin Connections


RFOUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

#### Maximum Ratings


Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	+11V
Absolute Max. Tuning Voltage (Vtune)	+22V

all specifications: 50 ohm system

#### Outline Drawing

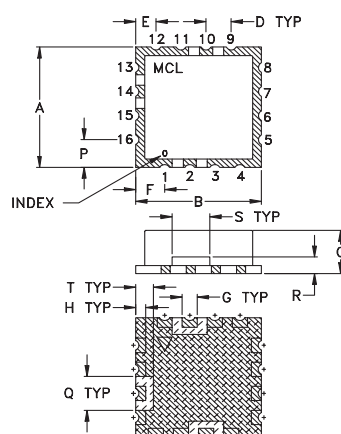


#### PCB Land Pattern



Suggested Layout,  
Tolerance to be within ±.002

#### Demo Board MCL P/N: TB-10 Suggested PCB Layout (PL-012)

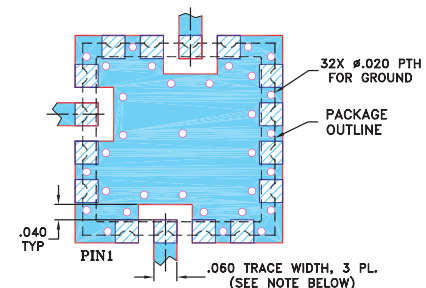

- NOTES: 1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

#### Outline Dimensions (inch)



A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070	grams
12.70	12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.0

# Performance Curves

# ROS-1900+ ROS-1900

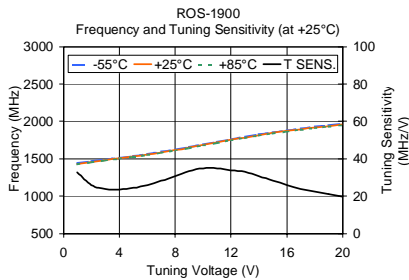

V TUNE	TUNING SENS. (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)		
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C
1.00	32.84	1441.05	1433.36	1427.06	8.57	8.01	7.28
2.00	25.83	1466.54	1459.20	1453.15	8.16	7.70	6.94
3.00	23.84	1490.34	1483.04	1477.10	7.72	7.34	6.66
4.00	23.60	1514.03	1506.64	1500.66	7.58	7.09	6.50
5.00	24.36	1538.50	1531.00	1524.93	7.69	7.24	6.54
6.00	25.98	1564.72	1556.97	1550.66	7.58	7.19	6.65
7.00	28.10	1593.12	1585.08	1578.61	7.35	7.05	6.64
8.00	30.78	1624.18	1615.85	1609.17	6.96	6.96	6.52
9.00	33.25	1657.76	1649.10	1642.25	6.37	6.46	6.14
10.00	34.89	1692.92	1683.99	1677.01	6.40	6.34	6.00
11.00	34.83	1727.99	1718.82	1711.85	6.56	6.56	6.16
12.00	33.94	1761.88	1752.76	1745.97	6.52	6.51	6.18
13.00	32.95	1794.61	1785.71	1778.80	6.08	6.34	6.00
14.00	30.80	1825.84	1816.51	1809.21	5.74	5.91	5.70
15.00	28.22	1854.43	1844.73	1837.19	5.94	6.04	5.70
16.00	25.99	1880.63	1870.72	1863.02	6.13	6.12	5.84
17.00	24.02	1904.72	1894.74	1886.92	6.36	6.30	5.87
18.00	22.41	1927.17	1917.15	1909.21	6.63	6.51	6.15
19.00	20.93	1948.17	1938.08	1930.09	6.58	6.76	6.37
20.00	19.74	1967.93	1957.82	1949.72	6.32	6.55	6.36

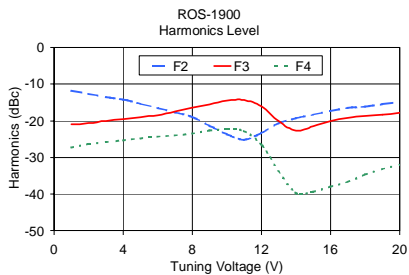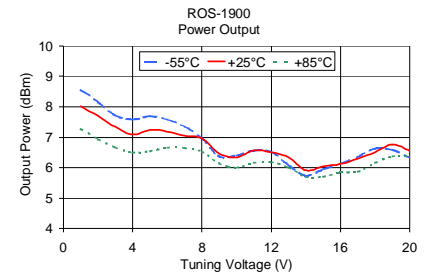

V TUNE	HARMONICS (dBc)			FREQ. PUSHING (MHz/V)
	F2	F3	F4	
1.00	-11.83	-21.00	-27.33	0.59
2.00	-12.67	-20.67	-26.33	0.62
3.00	-13.50	-20.00	-25.83	0.66
4.00	-14.17	-19.50	-25.33	0.67
5.00	-15.33	-19.00	-24.83	0.66
6.00	-16.50	-18.50	-24.33	0.70
7.00	-17.67	-17.50	-24.00	0.73
8.00	-19.00	-16.50	-23.50	0.73
9.00	-21.34	-15.50	-22.67	0.66
10.00	-23.67	-14.50	-22.33	0.46
11.00	-25.17	-14.33	-22.83	0.23
12.00	-23.33	-16.00	-26.50	0.03
13.00	-20.67	-20.17	-33.83	0.01
14.00	-19.33	-22.67	-39.67	0.09
15.00	-18.33	-21.50	-39.33	0.17
16.00	-17.33	-20.16	-38.00	0.23
17.00	-16.50	-19.16	-36.66	0.32
18.00	-16.17	-18.67	-34.67	0.35
19.00	-15.50	-18.33	-33.17	0.40
20.00	-14.83	-17.83	-32.00	0.46

