

Surface Mount, Micro-Miniature

# Power Splitter/Combiners

SBTC-2-15-75+ SBTC-2-15-75L+

2 Way-0° 75Ω

500 to 1500 MHz



No Leads

CASE STYLE:AT790  
PRICE: \$3.49 ea. QTY (25)  
\$2.69 ea. QTY (1000)



No Leads

CASE STYLE:AT1029  
PRICE:\$3.64 ea. QTY (25)  
\$2.84 ea. QTY (1000)

## Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.125W max.

## Pin Connections

SUM PORT	6
PORT 1	3
PORT 2	4
GROUND	1,2
NOT USED	5


## Outline Drawing / Dimensions (inch/mm)

### AT790 (SBTC-2-15-75+)

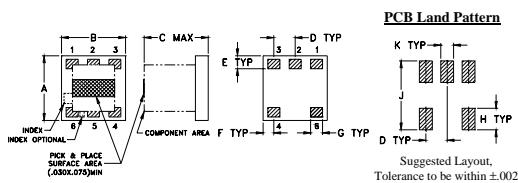


	A	B	C	D	E	F	G	H	J	K	wt.
	.150	.150	.150	.050	.030	.025	.028	.050	.160	.030	grams
	3.81	3.81	3.81	1.27	0.76	0.64	0.71	1.27	4.06	0.76	.10

### AT1029 (SBTC-2-15-75L+)

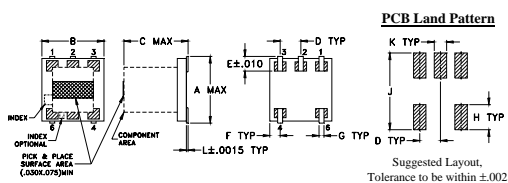

	A	B	C	D	E	F	G	H	J	K	L	wt.
	.166	.150	.155	.050	.037	.025	.012	.060	.184	.030	.004	grams
	4.22	3.81	3.94	1.27	0.94	0.64	0.30	1.52	4.67	0.76	0.10	.10

## Demo Board MCL P/N: TB-277 Suggested PCB Layout (PL-153)

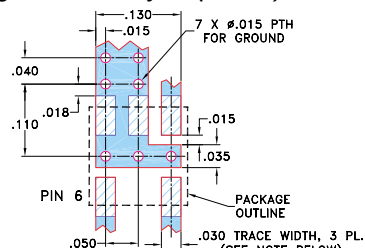

- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
3. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Features

- low insertion loss, 0.8 dB typ.
- excellent isolation 28 dB typ.
- very good phase unbalance, 1 deg. typ.
- small size, 0.166"x0.150"x0.155"
- temperature stable LTCC base
- small size
- low cost
- protected by US patent 6,963,255

## Applications




- VSAT
- internet over satellite modems

## Splitter Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)	INSERTION LOSS (dB) ABOVE 3.0 dB	PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
$f_L$ - $f_U$	Typ. Min.	Typ. Max.	Max.	Max.
500-1500	28 18	0.8 1.5	5	0.9
700-1500	28 20	0.8 1.5	4	0.7

## Typical Performance Data

Frequency (MHz)	Insertion Loss (dB) S-1	Loss (dB) S-2	Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
500.00	4.19	3.61	0.58	21.98	1.92	1.11	1.73	1.57
600.00	4.12	3.63	0.49	25.03	1.30	1.08	1.60	1.50
700.00	3.97	3.58	0.39	27.04	0.91	1.08	1.51	1.42
800.00	3.93	3.61	0.32	30.56	0.59	1.08	1.36	1.35
850.00	3.92	3.63	0.29	32.53	0.44	1.08	1.33	1.33
900.00	3.90	3.64	0.25	33.74	0.29	1.08	1.32	1.31
950.00	3.88	3.66	0.22	35.62	0.20	1.09	1.28	1.29
1000.00	3.86	3.68	0.18	39.45	0.15	1.10	1.22	1.27
1100.00	3.84	3.74	0.10	45.64	0.17	1.11	1.22	1.28
1200.00	3.85	3.81	0.04	43.71	0.19	1.14	1.14	1.24
1250.00	3.83	3.83	0.03	41.60	0.21	1.15	1.10	1.22
1300.00	3.81	3.86	0.05	41.15	0.19	1.17	1.10	1.23
1400.00	3.82	3.95	0.13	42.70	0.21	1.22	1.09	1.26
1450.00	3.83	4.00	0.17	42.33	0.24	1.25	1.11	1.27
1500.00	3.84	4.05	0.21	42.11	0.30	1.28	1.15	1.30

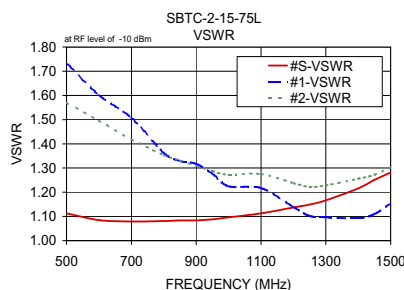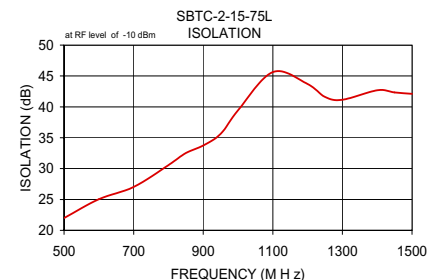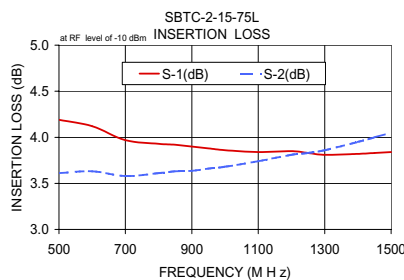

## electrical schematic



**Mini-Circuits**

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



REV. E  
M102713  
SBTC-2-15-75+ ED-9230/2  
SBTC-2-15-75L+ ED-9230A/1  
WZ/TD/CP  
060622