

Surface Mount

# Power Splitter/Combiner

2 Way-0° 50Ω

1 to 550 MHz

SCP-2-1A+  
SCP-2-1A


## Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.

## Pin Connections

SUM PORT	1
PORT 1	5
PORT 2	6
GROUND EXT.	2,3,4,7,8

## Outline Drawing

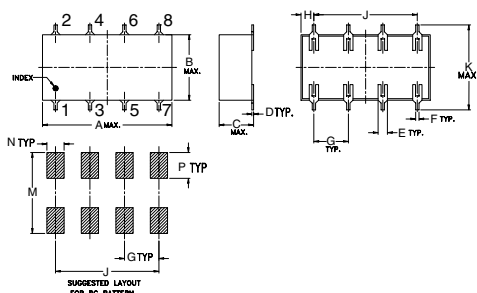


## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.75	.38	.20	.010	.050	.020	.200
19.05	9.65	5.08	0.25	1.27	0.51	5.08

H	J	K	M	N	P	wt
.075	.600	.450	.470	.100	.150	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.6

## Demo Board MCL P/N: TB-50 Suggested PCB Layout (PL-060)

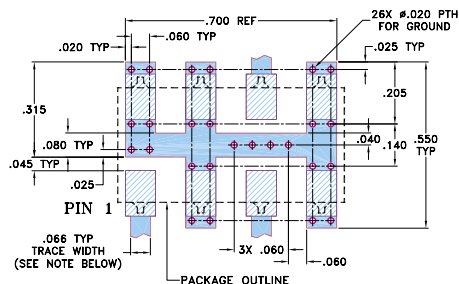

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Features

- wideband, 1 to 550 MHz
- low insertion loss, 0.3 dB typ.
- good isolation, 25 dB typ.
- good amplitude unbalance, 0.05 dB typ.

## Applications

- VHF/UHF
- communications receivers & transmitters
- instrumentation



CASE STYLE: YY101

PRICE: \$10.45 ea. QTY(10-49)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.




## Splitter Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 3.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
f <sub>L</sub> -f <sub>U</sub>	25	20	25	20	25	20	0.3	0.6	0.3	0.6	0.7	1.3	2.0	2.0	3.0	0.15	0.2	0.4


L = low range [f<sub>L</sub> to 10 f<sub>L</sub>] M = mid range [10 f<sub>L</sub> to f<sub>U</sub>/2] U = upper range [f<sub>U</sub>/2 to f<sub>U</sub>]

## Typical Performance Data

Frequency (MHz)	Insertion Loss (dB) S-1	Loss (dB) S-2	Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg)	VSWR S	VSWR 1	VSWR 2
1.00	3.35	3.35	0.00	23.78	0.02	1.09	1.32	1.32
24.00	3.22	3.21	0.00	27.98	0.00	1.09	1.08	1.08
70.00	3.25	3.25	0.00	28.31	0.05	1.09	1.08	1.08
116.00	3.28	3.27	0.01	28.06	0.07	1.08	1.07	1.07
162.00	3.30	3.30	0.01	27.73	0.11	1.08	1.06	1.05
208.00	3.32	3.31	0.01	27.37	0.14	1.07	1.05	1.04
254.00	3.35	3.33	0.02	26.99	0.16	1.07	1.03	1.02
300.00	3.38	3.35	0.02	26.87	0.17	1.06	1.02	1.01
341.67	3.40	3.37	0.03	26.82	0.19	1.05	1.01	1.01
383.33	3.43	3.39	0.03	26.97	0.19	1.05	1.02	1.02
425.00	3.45	3.41	0.04	27.39	0.20	1.04	1.03	1.04
466.67	3.48	3.44	0.05	28.07	0.21	1.04	1.05	1.07
508.33	3.52	3.47	0.05	28.76	0.18	1.06	1.07	1.09
529.17	3.55	3.49	0.06	28.92	0.17	1.08	1.08	1.10
550.00	3.57	3.51	0.06	28.82	0.18	1.10	1.10	1.12

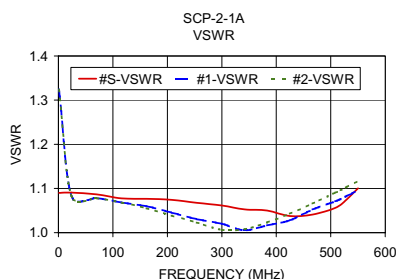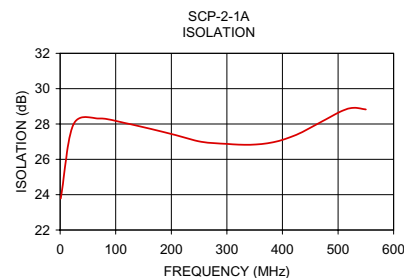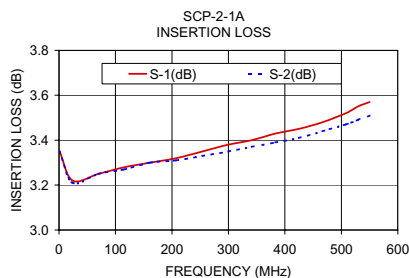

## electrical schematic

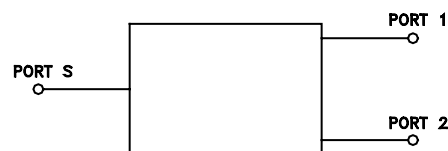

**Mini-Circuits®**

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>



REV. B  
M102713  
SCP-2-1A  
HY/TD/CP  
060117