

Surface Mount Power Splitter/Combiner

4 Way-0° 50Ω

10 to 650 MHz

SCP-4-1W+
SCP-4-1W



CASE STYLE: YY101

PRICE: \$26.95 ea. QTY (1-9)


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.25W max.

Pin Connections

SUM PORT	3
PORT 1	2
PORT 2	4
PORT 3	6
PORT 4	8
GROUND	1,5,7

Outline Drawing

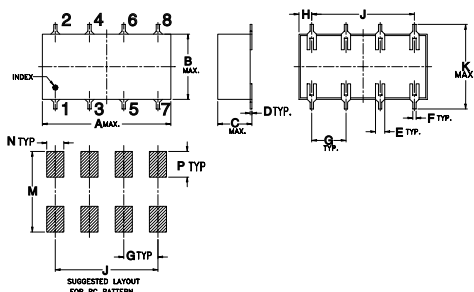


Outline Dimensions (inch)

A	B	C	D	E	F	G
0.75	0.38	0.28	0.01	0.05	0.02	0.2
19.05	9.65	7.11	0.25	1.27	0.51	5.08

H	J	K	M	N	P	wt
0.075	0.6	0.45	0.47	0.1	0.15	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.60

Demo Board MCL P/N: TB-36 Suggested PCB Layout (PL-073)

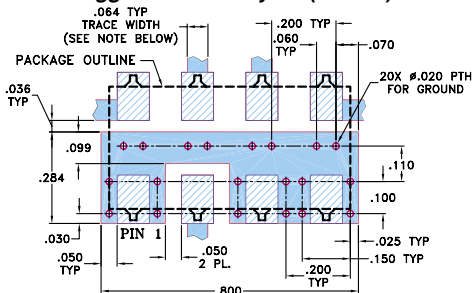

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, 10 to 650 MHz
- excellent amplitude unbalance, 0.4 dB typ.

Applications

- VHF/UHF
- receivers/transmitters
- federal and defense communication




Splitter Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 6 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L	M	U	L	M	U	L	M	U	L	M	U
f_L - f_U	Typ.	Min.	Typ. Min.	Typ.	Max.	Typ. Max.	Typ.	Max.	Typ. Max.	Max.	Max.	Max.
10-650	34	28	23 18 21 15	0.7	1.0	0.9 1.5 1.1 1.9	3	7	12	0.2	0.4	0.7


L = low range [f_L to 10 f_L] M = mid range [10 f_L to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR				
	S-1	S-2	S-3	S-4		1-2	2-3	3-4		S	1	2	3	4
10.00	6.38	6.36	6.36	6.36	0.02	37.18	42.07	38.05	0.07	1.07	1.13	1.13	1.12	1.12
30.00	6.41	6.39	6.39	6.38	0.02	36.10	42.30	36.46	0.12	1.06	1.12	1.12	1.12	1.12
90.00	6.44	6.43	6.43	6.42	0.02	33.76	39.74	33.67	0.43	1.05	1.12	1.12	1.12	1.12
120.00	6.47	6.46	6.46	6.44	0.03	32.46	38.76	32.19	0.58	1.04	1.12	1.12	1.12	1.12
150.00	6.50	6.49	6.49	6.47	0.03	31.21	38.02	30.82	0.70	1.03	1.12	1.12	1.11	1.12
180.00	6.47	6.47	6.48	6.45	0.03	29.92	37.23	29.49	0.85	1.02	1.11	1.11	1.11	1.11
210.00	6.51	6.52	6.52	6.49	0.04	28.87	36.52	28.36	0.95	1.01	1.11	1.11	1.11	1.11
240.00	6.55	6.56	6.56	6.52	0.04	27.96	35.86	27.40	1.10	1.01	1.10	1.11	1.10	1.10
300.00	6.58	6.59	6.59	6.54	0.05	26.21	34.39	25.59	1.33	1.05	1.09	1.09	1.09	1.09
375.00	6.63	6.65	6.66	6.58	0.08	24.48	32.64	23.81	1.69	1.10	1.07	1.08	1.07	1.08
450.00	6.70	6.75	6.75	6.63	0.12	23.16	31.19	22.46	1.94	1.15	1.06	1.07	1.06	1.06
525.00	6.77	6.86	6.86	6.70	0.15	22.23	30.20	21.51	2.32	1.21	1.04	1.05	1.05	1.04
575.00	6.79	6.88	6.87	6.69	0.19	21.76	29.83	21.04	2.45	1.24	1.03	1.05	1.04	1.04
625.00	6.83	6.95	6.94	6.73	0.22	21.37	29.74	20.65	2.66	1.28	1.03	1.05	1.04	1.03
650.00	6.88	7.01	6.99	6.77	0.25	21.19	29.79	20.47	2.73	1.29	1.03	1.05	1.04	1.03

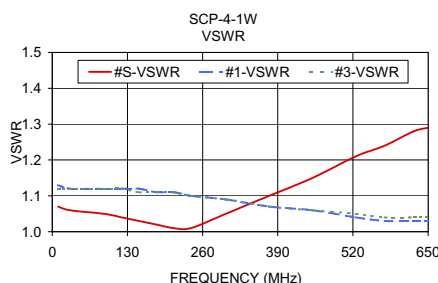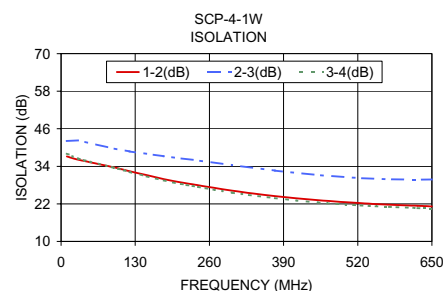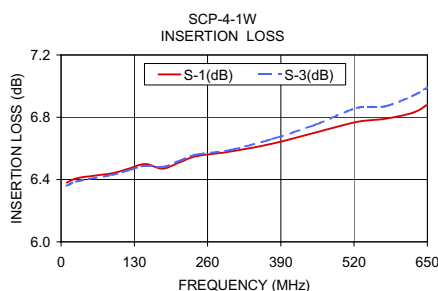

electrical schematic

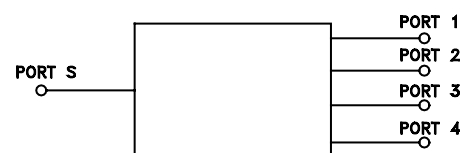

Mini-Circuits®

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



REV. B
M102713
SCP-4-1W
HY/TD/CP
060118