

# Surface Mount Power Splitter/Combiner

2 Way-90° 50Ω

120 to 180 MHz

SCPQ-180+  
SCPQ-180



CASE STYLE: YY101  
PRICE: \$13.95 ea. QTY (1-9)


## Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.

## Pin Connections

SUM PORT	1
PORT 1 (+90°)	2
PORT 2 (0°)	5
GROUND	3,4,7,8
50 OHM TERM EXTERNAL	6


## Outline Drawing

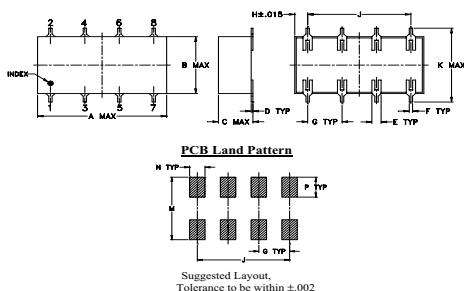

## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.75	.38	.20	.010	.050	.020	.200
19.05	9.65	5.08	0.25	1.27	0.51	5.08
H	J	K	M	N	P	wt
.075	.600	.450	.470	.100	.150	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.6

## Demo Board MCL P/N: TB-51 Suggested PCB Layout (PL-062)

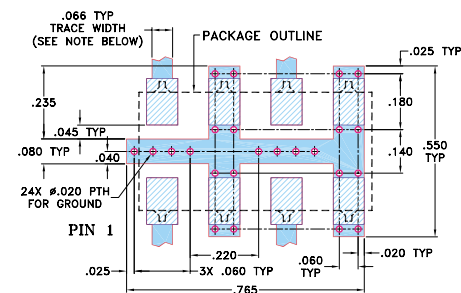

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Features

- low insertion loss, 0.3 dB typ.
- good isolation, 22 dB typ.

## Applications

- VHF-TV
- IF signal processing
- modulators

+ RoHS compliant in accordance with EU Directive (2002/95/EC)




The + suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

## Splitter Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)	INSERTION LOSS (dB) Avg. of Coupled Outputs less 3 dB	PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
$f_L$ - $f_U$	Typ. Min.	Typ. Max.	Max.	Max.
120-180	20 16	0.3 0.7	3	1.2

## Typical Performance Data

Frequency (MHz)	Insertion Loss (dB) S-1	Insertion Loss (dB) S-2	Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
120.00	3.49	3.05	0.44	25.26	89.92	1.17	1.27	1.10
123.00	3.42	3.10	0.32	25.20	89.89	1.17	1.28	1.09
126.00	3.35	3.15	0.20	25.14	89.88	1.17	1.28	1.09
130.50	3.26	3.21	0.05	25.05	89.82	1.17	1.29	1.08
135.00	3.19	3.27	0.08	24.94	89.73	1.18	1.29	1.08
139.50	3.14	3.33	0.19	24.81	89.57	1.18	1.30	1.07
144.00	3.10	3.39	0.29	24.66	89.44	1.18	1.31	1.08
148.50	3.09	3.46	0.37	24.50	89.28	1.18	1.31	1.08
153.00	3.09	3.53	0.44	24.29	89.09	1.18	1.32	1.09
157.50	3.10	3.60	0.50	24.06	88.96	1.19	1.33	1.11
162.00	3.12	3.68	0.55	23.78	88.88	1.19	1.33	1.12
168.00	3.18	3.77	0.59	23.34	88.87	1.19	1.34	1.14
174.00	3.24	3.85	0.61	22.82	89.05	1.19	1.35	1.16
177.00	3.27	3.88	0.61	22.54	89.11	1.19	1.36	1.17
180.00	3.30	3.90	0.61	22.24	89.25	1.20	1.37	1.18

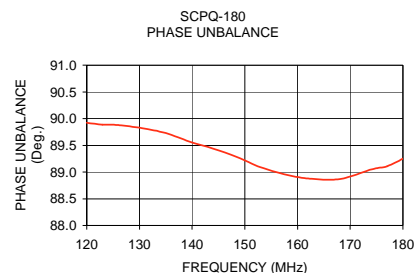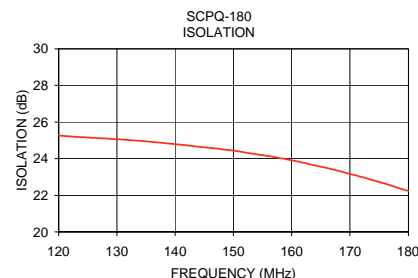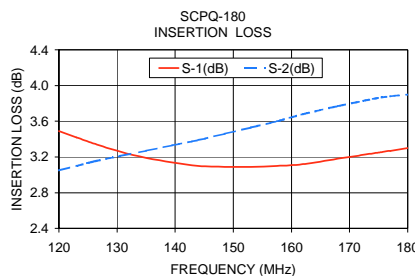

## electrical schematic



**Mini-Circuits®**

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>



REV. B  
M102713  
SCPQ-180  
HY/TD/CP  
060120