

Coaxial High Pass Filter

50Ω 1000 to 2200 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

Features

- rugged shielded case
- other standard and custom SHP models available with wide selection of fco

Applications

- lab use
- transmitters/receivers
- radio communications

SHP-1000+
SHP-1000



CASE STYLE: FF99

Connectors	Model	Price	Qty.
SMA	SHP-1000(+)	\$38.95 ea.	(1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


High Pass Filter Electrical Specifications

STOPBAND (MHz)	fco (MHz) Nom.	PASSBAND (MHz)	VSWR (:1)
(loss > 40 dB)	(loss > 20 dB)	(loss < 3 dB)	(loss < 1 dB)
DC-550	550-720	900	1000-2200
			Stopband Typ. Passband Typ.
			17 1.9


Outline Drawing

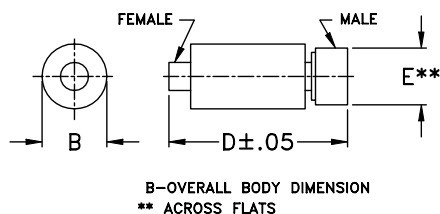

typical frequency response






electrical schematic



Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
\bar{x}	σ			
10.00	83.18	2.8	420.00	2.22
200.00	87.50	7.1	430.00	1.93
330.00	81.91	4.5	440.00	0.04
410.00	69.01	3.7	450.00	1.38
430.00	64.76	2.6	480.00	1.80
440.00	63.14	2.6	500.00	0.67
450.00	61.53	2.3	550.00	0.76
480.00	56.69	1.8	610.00	1.26
500.00	53.07	1.3	620.00	1.48
550.00	45.76	1.0	640.00	1.37
610.00	36.92	0.6	650.00	1.22
640.00	32.87	0.5	660.00	1.18
660.00	30.45	0.5	670.00	1.18
670.00	29.21	0.5	700.00	1.23
700.00	25.28	0.4	720.00	1.37
720.00	22.61	0.4	770.00	1.95
770.00	15.62	0.4	790.00	2.35
820.00	9.80	0.5	820.00	2.04
860.00	4.84	0.4	840.00	1.97
880.00	2.75	0.4	860.00	2.88
885.00	2.41	0.4	880.00	3.59
900.00	1.81	0.4	885.00	3.56
920.00	1.40	0.3	900.00	3.22
1000.00	0.57	0.1	920.00	2.58
1560.00	0.53	0.1	1000.00	1.90
1745.00	0.42	0.1	1560.00	0.83
1925.00	0.62	0.1	1650.00	0.82
2015.00	0.59	0.1	1745.00	0.87
2110.00	0.77	0.1	1835.00	0.75
2200.00	0.71	0.1	1925.00	0.73

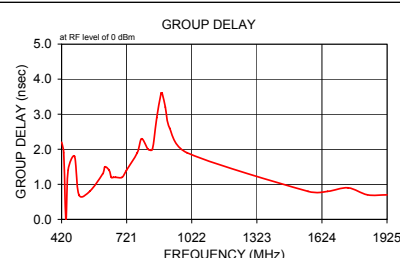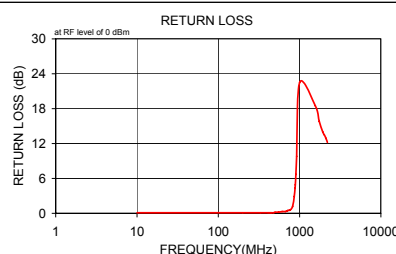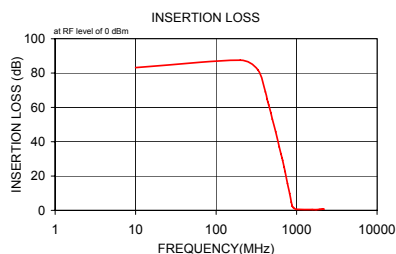

Mini-Circuits®

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661
Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

REV. A
M98898
SHP-1000
060530