

Coaxial

Low Pass Filter

SLP-600+ SLP-600

50Ω DC to 580 MHz
Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

Features

- good attenuation rate, 1.35 typ. 20dB/3dB BW ratio
- rugged shielded case
- other SLP models available with wide selection of cut-off frequencies

Applications

- lab use
- test equipment
- video equipment



CASE STYLE: FF99

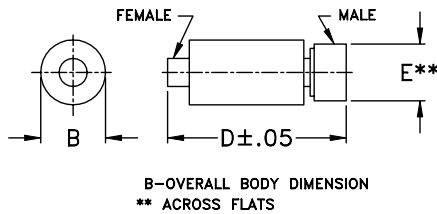
Connectors	Model	Price	Qty.
SMA	SLP-600(+)	\$34.95 ea.	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)



The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Low Pass Filter Electrical Specifications

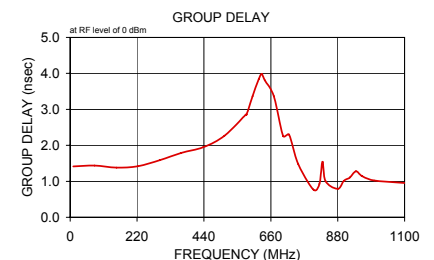
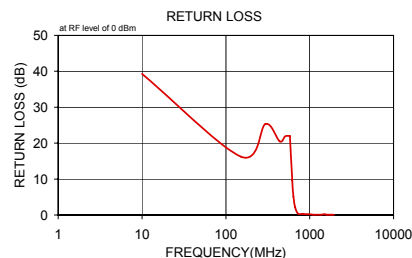
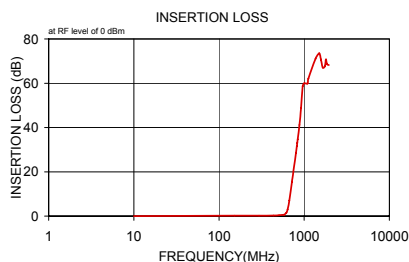
PASSBAND (MHz)	fco (MHz) Nom.	STOPBAND (MHz)		VSWR (:1)	
(loss < 1 dB)	(loss 3 dB)	(loss > 20 dB)	(loss > 40 dB)	Passband Typ.	Stopband Typ.
DC-580	640	840-1120	1120-2000	1.7	18

Outline Drawing

Outline Dimensions (inch/mm)

B	D	E	wt
.67	1.98	.312	grams
17.02	50.29	7.92	42.0

typical frequency response

electrical schematic

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	\bar{x}	σ		
10.00	0.01	0.1	10.00	1.41
152.50	0.22	0.2	80.00	1.44
295.00	0.20	0.1	152.50	1.38
437.50	0.28	0.1	222.50	1.42
507.50	0.37	0.1	295.00	1.59
577.50	0.59	0.1	365.00	1.79
580.00	0.60	0.1	437.50	1.95
620.00	1.50	0.3	507.50	2.27
640.00	2.98	0.4	577.50	2.86
670.00	7.09	0.6	580.00	2.85
720.00	15.52	2.0	600.00	3.36
800.00	28.44	4.7	620.00	3.84
820.00	31.52	5.4	630.00	4.98
830.00	33.06	5.7	640.00	3.81
840.00	34.63	6.1	670.00	3.37
880.00	41.22	8.0	700.00	2.26
920.00	48.84	9.9	720.00	2.30
960.00	58.62	9.9	750.00	1.48
1000.00	59.95	9.9	800.00	0.77
1100.00	59.89	8.4	820.00	0.93
1120.00	62.05	8.8	830.00	1.54
1360.00	71.05	2.3	840.00	1.00
1502.50	73.53	9.3	880.00	0.79
1572.50	70.71	4.9	900.00	1.01
1650.00	67.12	3.4	920.00	1.11
1750.00	67.73	7.7	940.00	1.28
1800.00	70.74	9.5	960.00	1.15
1850.00	68.64	9.1	1000.00	1.02
1950.00	68.21	7.1	1100.00	1.95
2000.00	65.82	4.6	1120.00	0.85


Mini-Circuits®

 INTERNET <http://www.minicircuits.com>

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

 REV. A
M98898
SLP-600
060628