

# Surface Mount Phase Detector

50Ω High Output 1 to 100 MHz

**SYPD-1+**  
**SYPD-1**



CASE STYLE: TTT167  
PRICE: \$14.95 ea. QTY (1-9)

**+ RoHS compliant in accordance  
with EU Directive (2002/95/EC)**

The +Suffix identifies RoHS Compliance. See our web site  
for RoHS Compliance methodologies and qualifications.


## Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Input Power	50mW
Peak IF current	20mA

## Pin Connections

RF REF (RF2)	2
RF IN (RF1)	1
DC OUT (I)	3
GROUND	4,5,6


## Outline Drawing

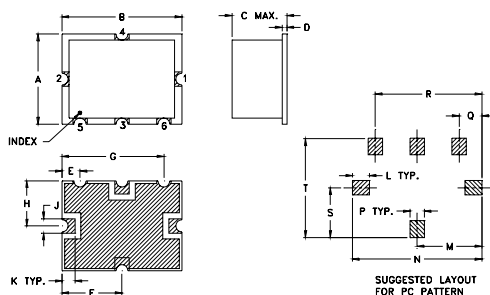

## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	
.375	.500	.23	.020	.075	.250	.425	.187	.050	
9.53	12.70	5.84	0.51	1.91	6.35	10.80	4.75	1.27	
K	L	M	N	P	Q	R	S	T	wt.
.050	.070	.270	.540	.060	.095	.445	.208	.415	grams
1.27	1.78	6.86	13.72	1.52	2.41	11.30	5.28	10.54	0.8

## Demo Board MCL P/N: TB-12 Suggested PCB Layout (PL-079)

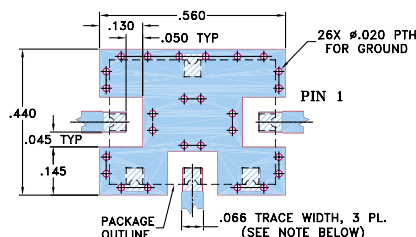

- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. GROUND PAD SHALL BE FREE OF SOLDER MASK IF REQUIRED FOR SOLDERING.  
3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER), SEE NOTE 2.  
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Features

- wideband, 1 to 100 MHz
- low DC offset, 0.2 mV typ.
- high DC output, 1000 mV typ.
- high isolation, 40 dB min.

## Applications




- monitoring circuits
- leveling circuits
- PLL

## Phase Detector Electrical Specifications


FREQUENCY (MHz)		POWER IN	SCALE FACTOR	IMPEDANCE (ohms) Output Load I	ISOLATION (dB)	OUTPUT POLARITY	DC OUTPUT (mV)				FIGURE OF MERIT
RF1	I	RF2			RF1/RF2	RF1/RF2	Max. Offset				
RF2		(dBm)	mV/deg.		Min.	In-Phase	Typ.	Min.	Typ.	Max.	Typ.
1-100	DC-50	7	8	500	40	neg.	100	700	0.2	1	143

## Typical Performance Data

Frequency (MHz)	DC Output mV	DC Offset mV	RF1-RF2 Isolation (dB)
	$\bar{X}$ $\sigma$	$\bar{X}$ $\sigma$	$\bar{X}$
1.00	-769.98 14.85	0.10 0.16	76.12
5.00	-830.34 8.90	0.11 0.18	75.09
8.07	-840.24 14.44	0.11 0.18	74.07
10.00	-843.71 14.61	0.10 0.18	73.19
15.14	-851.12 17.01	0.11 0.19	70.19
20.00	-859.20 18.91	0.11 0.19	68.10
22.21	-861.26 20.52	0.10 0.20	67.28
29.29	-872.02 22.55	0.11 0.21	65.14
36.36	-881.57 24.77	0.11 0.22	63.29
40.00	-886.86 25.39	0.12 0.23	62.38
43.43	-889.93 26.41	0.12 0.23	61.76
50.50	-917.82 25.99	0.14 0.25	60.51
57.57	-927.50 28.69	0.15 0.27	59.35
60.00	-917.14 33.08	0.15 0.26	59.18
64.64	-920.62 38.60	0.15 0.27	58.73
71.71	-925.22 45.18	0.17 0.31	57.82
78.79	-928.03 51.83	0.18 0.31	57.35
85.86	-932.34 57.31	0.17 0.31	57.15
92.93	-932.98 60.65	0.18 0.38	56.93
100.00	-909.17 74.27	0.23 0.43	56.36

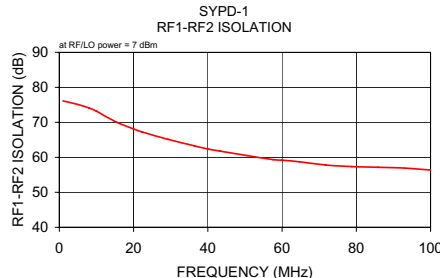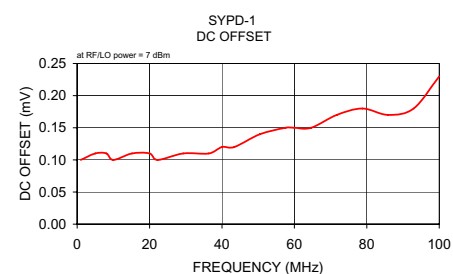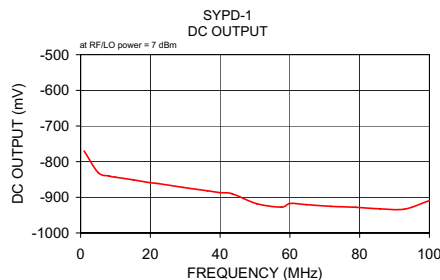

## electrical schematic

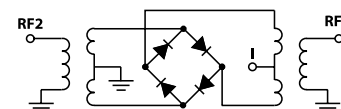

**Mini-Circuits®**

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>



REV. B  
M102713  
SYPD-1  
DJ/TD/CP  
060804