

# Plug-In Low Noise Amplifier

800 to 1200 MHz

**NEW!**  
TO-0812LN

## Maximum Ratings


Operating Temperature	-54°C to 85°C
Storage Temperature	-55°C to 100°C

## Pin Connections

RF IN	5
RF OUT	11
DC	2
CASE GND	1,3,4,6,7,8,9,10,12

## Features

- very low noise, 0.8 dB typ.
- ideal for printed circuit design
- excellent gain flatness
- hermetic sealed



CASE STYLE: QQ96  
PRICE: \$199.00 ea. QTY (1-9)

## Applications


- military

## Electrical Specifications

MODEL NO.	FREQ. (MHz)	NF* (dB)	GAIN (dB)		MAXIMUM POWER (dBm)		INTERCEPT POINT (dBm)	VSWR (:1) Max.		DC POWER	
			Min.	Flatness Max.	Output (1 dB Comp.) Typ.	Input (no damage)		In	Out	Volt (V)	Current (mA)
TO-0812LN	800-1200	1.2	20	±1.0	+8	+10	+22.5	2.5	2.5	15	70

\*NF specified at room temperature, increases to 1.6 dB max. at +85°C

## Outline Drawing



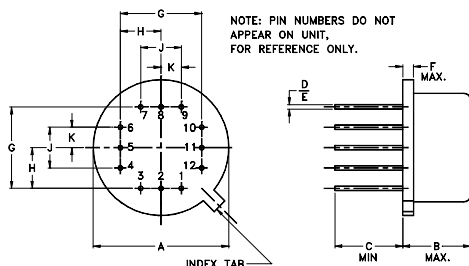


## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
.600	.250	.25	.016	.020	.04	.400	.200
15.24	6.35	6.35	.41	.51	1.02	10.16	5.08
J	K	wt.					
.200	.100	grams					
5.08	2.54	4.0					

## Typical Performance Data

Frequency (MHz)	Gain (dB)			Directivity (dB)			VSWR		N.F. (dB)	Pout (dBm) (@1dB COMPR)
	12V	15V	16V	12V	15V	16V	IN	OUT		
800.00	25.24	26.21	26.52	25.41	25.15	25.41	2.21	1.84	0.97	9.27
850.00	25.45	26.39	26.68	24.15	23.86	24.15	1.90	1.69	0.92	9.74
900.00	25.57	26.47	26.75	23.16	22.93	23.16	1.70	1.58	0.92	9.88
950.00	25.65	26.51	26.77	22.43	22.37	22.43	1.59	1.52	0.90	10.22
1000.00	25.70	26.53	26.78	21.75	21.94	21.75	1.57	1.46	0.92	10.46
1050.00	25.78	26.59	26.83	21.13	21.18	21.13	1.61	1.42	0.90	10.68
1100.00	25.85	26.65	26.89	20.54	20.51	20.54	1.71	1.40	0.88	10.88
1150.00	25.96	26.74	26.98	20.06	20.16	20.06	1.85	1.39	0.85	10.95
1170.00	25.99	26.78	27.02	19.68	19.83	19.68	1.91	1.39	0.85	10.95
1200.00	26.03	26.83	27.07	19.55	19.55	19.55	2.01	1.39	0.82	10.95

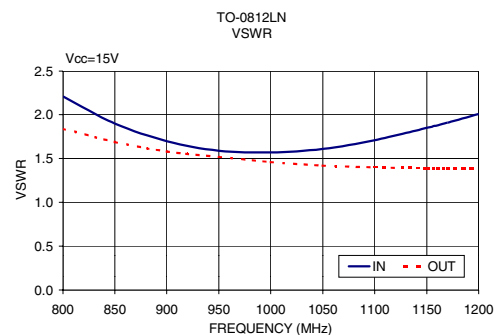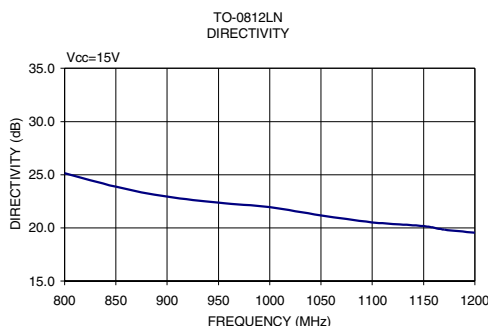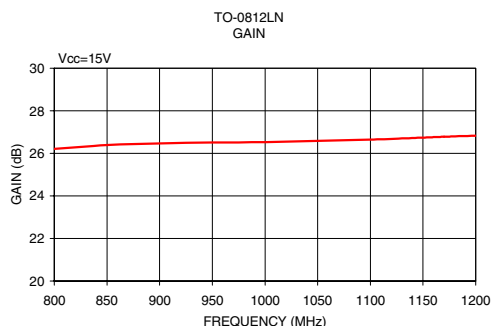

**Mini-Circuits®**

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

ISO 9001 CERTIFIED

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

REV. OR  
M89420  
EDB-030103  
TO-0812LN  
EL/TD/CP  
031103