

Coaxial Frequency Mixer

Level 23 (LO Power +23 dBm) 5 to 500 MHz

ZAY-1



Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	350mW
IF Current	40mA

Coaxial Connections

LO	1
RF	3
IF	2

Features

- low conversion loss, 6.57 dB typ.
- high L-R isolation, 40 dB typ. L-R & L-I
- rugged shielded case


Applications

- VHF/UHF
- instrumentation
- federal & defense communication

CASE STYLE: M22

Connectors	Model	Price	Qty.
BNC	ZAY-1	\$64.95	(1-9)
BRACKET (OPTION "B")		\$5.00	(1+)
BRACKET (OPTION "BR")		\$1.50	(1+)

Outline Drawing

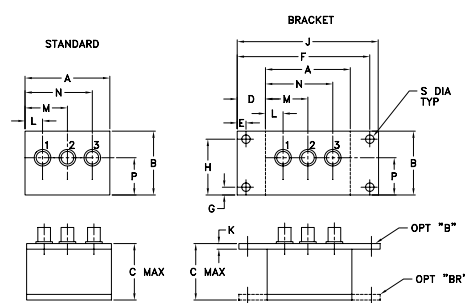

Outline Dimensions (inch)

A	B	C	D	E	F	G	H
2.25	1.38	1.24	.50	.150	3.100	.138	1.238
57.15	35.05	31.50	12.70	3.81	78.74	3.51	31.45

J	K	L	M	N	P	S	wt
3.25	.10	.40	1.15	1.86	.64	.150	grams
82.55	2.54	10.16	29.21	47.24	16.26	3.81	74.0

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
LO/RF	IF	Mid-Band		Total		L		M		U		L		M		U	
f_L - f_U		\bar{X}	σ	Max.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.
5-500	DC-500	6.57	0.9	7.5	8.5	55	45	40	30	30	25	55	45	40	30	30	20

1 dB COMP.: +15 dBm typ.

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]

m = mid band [$2f_L$ to $f_U/2$]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +23dBm	LO +23dBm	LO +23dBm	LO +23dBm	LO +23dBm
5.00	35.00	6.52	57.02	82.02	1.29	2.50
10.00	40.00	6.40	56.72	82.32	1.14	2.37
20.00	50.00	6.40	54.48	81.28	1.06	2.33
35.94	65.94	6.43	51.51	75.99	1.05	2.31
50.00	80.00	6.40	48.82	72.57	1.07	2.37
82.35	52.35	6.39	45.62	62.91	1.08	2.20
100.00	70.00	6.36	44.05	58.66	1.10	2.25
144.22	114.22	6.53	41.60	53.71	1.12	2.11
175.16	145.16	6.68	40.04	51.38	1.14	2.25
200.00	170.00	6.69	39.45	50.73	1.16	2.06
221.57	191.57	6.52	36.41	46.45	1.18	2.17
252.50	222.50	6.52	36.33	47.23	1.20	2.04
283.44	253.44	6.64	36.36	47.98	1.22	2.10
314.38	284.38	6.74	36.35	46.73	1.24	1.96
345.32	315.32	6.62	33.85	44.99	1.26	2.04
376.26	346.26	6.50	30.50	41.75	1.29	1.96
407.19	377.19	6.43	32.89	42.28	1.31	1.95
438.13	408.13	6.50	33.81	42.66	1.35	1.90
469.07	439.07	6.81	33.63	41.41	1.38	1.87
500.00	470.00	6.62	34.24	40.42	1.44	1.83

Electrical Schematic

