

Coaxial Frequency Mixer

Level 7 (LO Power +7 dBm) 0.025 to 200 MHz


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Coaxial Connections

LO	1
RF	3
IF	2

Outline Drawing

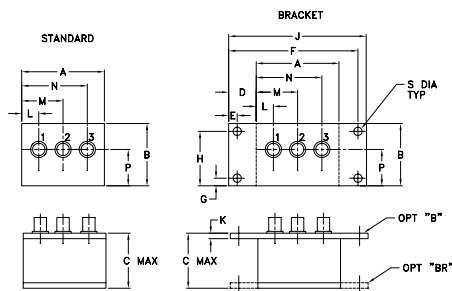

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
1.50	1.13	1.00	.50	.155	2.345	.138	.987
38.10	28.70	25.40	12.70	3.94	59.56	3.51	25.07

J	K	L	M	N	P	S	wt
2.50	.10	.31	.75	1.19	.66	.150	grams
63.50	2.54	7.87	19.05	30.23	16.76	3.81	40.0

Features

- low conversion loss, 4.61 dB typ.
- high L-R isolation, 45 dB typ., L-I, 40 dB typ.
- rugged shielded case

Applications

- VHF
- FM radio
- instrumentation

ZLW-3



CASE STYLE: M21

Connectors	Model	Price	Qty.
BNC	ZLW-3	\$53.95 ea.	(1-9)
BRACKET (OPTION "B")		\$5.00	(1+)
BRACKET (OPTION "BR")		\$2.50	(1+)

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
LO/RF	IF	Mid-Band		Total		L		M		U		L		M		U	
f_L - f_U		\bar{X}	σ	Max.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.
0.025-200	DC-200	4.61	0.06	7.5	8.5	60	50	45	35	35	25	45	35	40	30	30	20

1 dB COMP.: +1 dBm typ.

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]
m = mid band [$2f_L$ to $f_U/2$]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
0.03	30.03	6.94	58.72	53.27	1.16	2.06
0.04	30.04	5.80	55.35	51.43	1.17	2.04
0.05	30.05	5.52	54.61	51.09	1.17	2.01
0.10	30.10	5.16	53.51	50.41	1.16	1.99
0.20	30.20	4.98	53.27	50.18	1.16	2.05
0.50	30.50	4.92	53.12	50.13	1.15	2.08
1.00	31.00	4.82	53.18	50.48	1.15	2.07
2.00	32.00	4.77	53.13	50.55	1.14	2.07
5.00	35.00	4.76	53.42	50.99	1.13	2.05
10.00	40.00	4.81	53.68	51.27	1.11	2.02
20.00	50.00	4.87	53.67	50.52	1.10	2.02
38.48	68.48	4.96	53.25	48.52	1.09	2.02
50.00	80.00	4.94	53.49	47.54	1.09	2.03
69.25	99.25	4.90	53.53	45.77	1.08	2.03
84.63	54.63	4.86	53.31	44.13	1.09	2.05
100.00	70.00	4.81	53.55	42.70	1.11	2.07
123.09	93.09	4.87	55.31	40.58	1.13	2.11
153.85	123.85	4.96	52.97	38.04	1.15	2.13
176.93	146.93	5.19	49.53	38.76	1.18	2.14
200.00	170.00	5.28	45.61	38.31	1.21	2.15

Electrical Schematic

