


Frequency Mixer

Level 7 (LO Power +7 dBm) 5 to 1500 MHz

ZX05-5



CASE STYLE: FL905

Connectors	Model	Price	Qty.
SMA	ZX05-5-S	\$37.95 ea.	(1-24)

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Coaxial Connections

LO	1
RF	2
IF	3

Features

- rugged construction
- small size
- low conversion loss
- high L-R isolation
- protected by US Patents 6,133,525 & 6,790,049

Applications

- cellular
- PCS
- instrumentation
- satellite communication

Electrical Specifications (T_{AMB}=25°C)

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3 at center band (dBm)
LO/RF f_L - f_U	IF	Mid-Band m		Total Range		L		M		U		L		M		U		
		\overline{X}	σ	Max.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	
						50	40	40	25	33	23	50	40	30	20	20	10	
5-1500	DC-1000	6.6	0.1	7.5	9.3	50	40	40	25	33	23	50	40	30	20	20	10	15

1 dB COMP.: +1 dBm typ.

Positive detection: positive output with in-phase RF & LO signals


L = low range [f_L to 10 f_L]

m = mid band [2 f_L to f_U/2]

M = mid range [10 f_L to f_U/2]

U = upper range [f_U/2 to f_U]

Outline Drawing

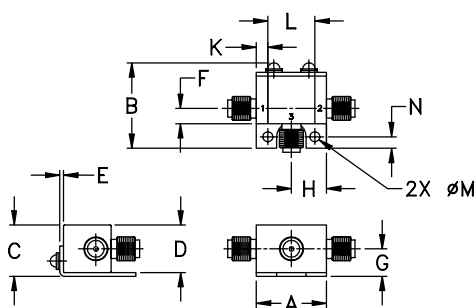

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.74	.90	.54	.50	.04	.16	.29
18.80	22.86	13.72	12.70	1.02	4.06	7.37

H	J	K	L	M	N	wt
.37	--	.122	.496	.106	.122	grams
9.40	--	3.10	12.60	2.69	3.10	20.0

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
5.10	35.10	6.93	82.10	96.28	1.48	1.83
35.10	65.10	6.51	65.10	76.81	1.38	1.80
50.10	80.10	6.48	61.74	69.65	1.37	1.80
100.10	70.10	6.60	55.18	56.54	1.36	1.77
171.43	141.43	6.54	50.58	45.84	1.35	1.80
254.10	224.10	6.51	47.52	39.83	1.33	1.78
336.77	306.77	6.56	45.52	36.24	1.32	1.78
419.43	389.43	6.63	43.47	34.05	1.31	1.78
502.10	472.10	6.58	42.13	31.97	1.30	1.81
584.77	554.77	6.56	40.92	30.53	1.28	1.82
667.43	637.43	6.64	37.49	29.33	1.25	1.84
750.10	720.10	6.78	35.27	28.03	1.24	1.87
831.53	801.53	6.81	34.84	25.74	1.19	1.90
934.39	904.39	6.70	33.83	23.60	1.09	1.91
1037.24	1007.24	6.59	33.85	22.24	1.05	1.97
1140.10	1110.10	6.66	33.64	21.45	1.20	2.09
1242.96	1212.96	7.02	32.75	20.75	1.41	2.22
1345.81	1315.81	7.39	31.63	18.60	1.62	2.15
1448.67	1418.67	7.75	29.54	17.12	1.84	2.01
1500.10	1470.10	7.94	28.84	17.08	1.93	2.06

Electrical Schematic

