

**PRELIMINARY**  
 Notice: This is not a final specification.  
 Some parametric limits are subject to change.

# MITSUBISHI HVIGBT MODULES CM1200HB-50H

2nd-Version HVIGBT (High Voltage Insulated Gate Bipolar Transistor) Modules

**HIGH POWER SWITCHING USE  
 INSULATED TYPE**

## CM1200HB-50H




- IC ..... 1200A
- VCES ..... 2500V
- Insulated Type
- 1-element in a pack

## APPLICATION

Inverters, Converters, DC choppers, Induction heating, DC to DC converters.

## OUTLINE DRAWING & CIRCUIT DIAGRAM

Dimensions in mm

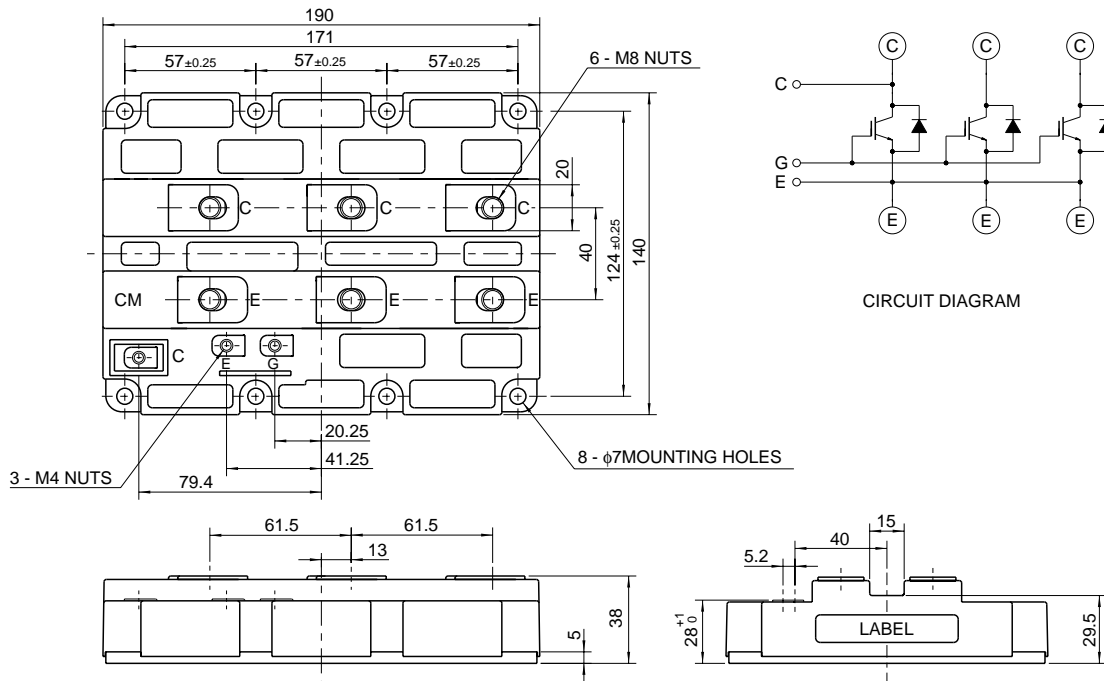

HVIGBT MODULES (High Voltage Insulated Gate Bipolar Transistor Modules)

Feb.1999

# CM1200HB-50H

**HIGH POWER SWITCHING USE  
 INSULATED TYPE**

2nd-Version HVIGBT (High Voltage Insulated Gate Bipolar Transistor) Modules

## MAXIMUM RATINGS (T<sub>j</sub> = 25°C)

Symbol	Parameter	Conditions	Ratings	Unit
V <sub>CE</sub>	Collector-emitter voltage	G-E Short	2500	V
V <sub>GE</sub>	Gate-emitter voltage	C-E Short	±20	V
I <sub>C</sub>	Collector current	T <sub>C</sub> = 25°C	1200	A
I <sub>CM</sub>		Pulse (Note 2)	2400	A
I <sub>E</sub> (Note 1)	Emitter current	T <sub>C</sub> = 25°C	1200	A
I <sub>EM</sub> (Note 1)		Pulse (Note 2)	2400	A
P <sub>C</sub> (Note 3)	Maximum collector dissipation	T <sub>C</sub> = 25°C	15630	W
T <sub>j</sub>	Junction temperature	—	−40 ~ +150	°C
T <sub>stg</sub>	Storage temperature	—	−40 ~ +125	°C
V <sub>iso</sub>	Isolation voltage	Main terminal to Bass, AC for 1 minute	6000	V
—	Mounting torque	Main terminals screw M8	6.67 ~ 13.00	N·m
		Mounting screw M6	2.84 ~ 6.00	N·m
		Auxiliary terminals screw M4	0.88 ~ 2.00	N·m
—	Weight	Typical value	2.2	kg

## ELECTRICAL CHARACTERISTICS (T<sub>j</sub> = 25°C)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
I <sub>CES</sub>	Collector cutoff current	V <sub>CE</sub> = V <sub>CE</sub> , V <sub>GE</sub> = 0V	—	—	15	mA
V <sub>GE(th)</sub>	Gate-emitter threshold voltage	I <sub>C</sub> = 120mA, V <sub>CE</sub> = 10V	4.5	6.0	7.5	V
I <sub>GES</sub>	Gate-leakage current	V <sub>GE</sub> = V <sub>GES</sub> , V <sub>CE</sub> = 0V	—	—	0.5	μA
V <sub>CE(sat)</sub>	Collector-emitter saturation voltage	T <sub>j</sub> = 25°C	—	2.80	3.64	V
		T <sub>j</sub> = 125°C	—	3.15	—	
C <sub>ies</sub>	Input capacitance	V <sub>CE</sub> = 10V V <sub>GE</sub> = 0V	—	180	—	nF
C <sub>oes</sub>	Output capacitance		—	13.5	—	nF
C <sub>res</sub>	Reverse transfer capacitance		—	6.0	—	nF
Q <sub>G</sub>	Total gate charge	V <sub>CC</sub> = 1250V, I <sub>C</sub> = 1200A, V <sub>GE</sub> = 15V	—	15	—	μC
t <sub>d</sub> (on)	Turn-on delay time	V <sub>CC</sub> = 1250V, I <sub>C</sub> = 1200A	—	—	1.60	μs
t <sub>r</sub>	Turn-on rise time	V <sub>GE1</sub> = V <sub>GE2</sub> = 15V	—	—	2.00	μs
t <sub>d</sub> (off)	Turn-off delay time	R <sub>G</sub> = 1.6Ω	—	—	2.50	μs
t <sub>f</sub>	Turn-off fall time	Resistive load switching operation	—	—	1.00	μs
V <sub>EC</sub> (Note 1)	Emitter-collector voltage	I <sub>E</sub> = 1200A, V <sub>GE</sub> = 0V	—	2.50	3.25	V
t <sub>rr</sub> (Note 1)	Reverse recovery time	I <sub>E</sub> = 1200A,	—	—	1.20	μs
Q <sub>rr</sub> (Note 1)	Reverse recovery charge	die / dt = −2400A / μs (Note 1)	—	350	—	μC
R <sub>th(j-c)Q</sub>	Thermal resistance	IGBT part	—	—	0.008	°C/W
R <sub>th(j-c)R</sub>		FWDi part	—	—	0.016	°C/W
R <sub>th(c-f)</sub>	Contact thermal resistance	Case to fin, conductive grease applied	—	0.006	—	°C/W

Note 1. I<sub>E</sub>, V<sub>EC</sub>, t<sub>rr</sub>, Q<sub>rr</sub> & die/dt represent characteristics of the anti-parallel, emitter to collector free-wheel diode.

2. Pulse width and repetition rate should be such that the device junction temp. (T<sub>j</sub>) does not exceed T<sub>jmax</sub> rating.

3. Junction temperature (T<sub>j</sub>) should not increase beyond 150°C.


4. Pulse width and repetition rate should be such as to cause negligible temperature rise.

HVIGBT MODULES (High Voltage Insulated Gate Bipolar Transistor Modules)

Feb.1999


**PERFORMANCE CURVES**

**OUTPUT CHARACTERISTICS  
 (TYPICAL)**

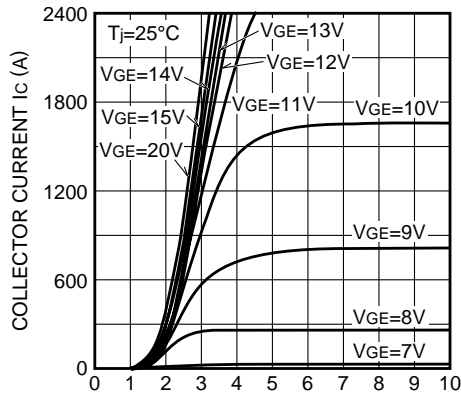


COLLECTOR-EMITTER SATURATION VOLTAGE  $V_{CE(sat)}$  (V)

**TRANSFER CHARACTERISTICS  
 (TYPICAL)**

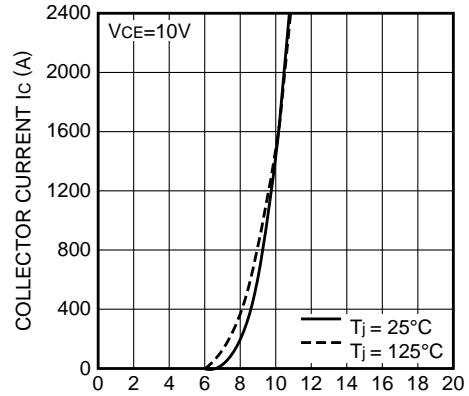


GATE-EMITTER VOLTAGE  $V_{GE}$  (V)

**COLLECTOR-EMITTER SATURATION  
 VOLTAGE CHARACTERISTICS  
 (TYPICAL)**

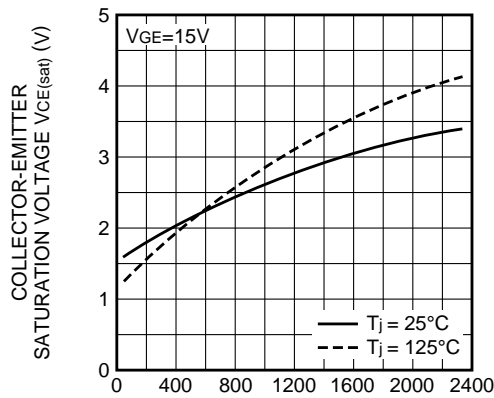


COLLECTOR CURRENT  $I_c$  (A)

**COLLECTOR-EMITTER SATURATION  
 VOLTAGE CHARACTERISTICS  
 (TYPICAL)**

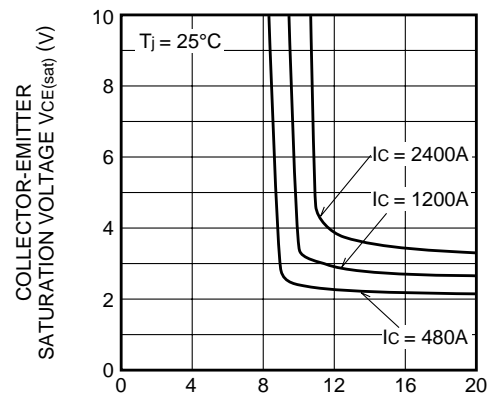

GATE-EMITTER VOLTAGE  $V_{GE}$  (V)

**FREE-WHEEL DIODE  
 FORWARD CHARACTERISTICS  
 (TYPICAL)**

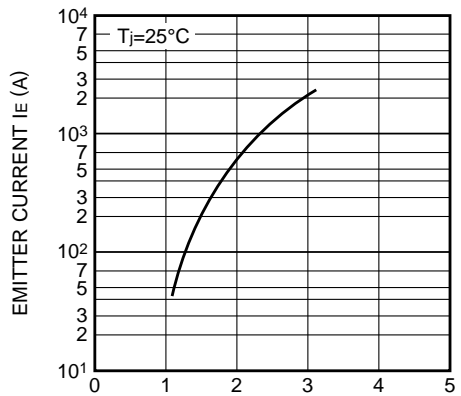

EMITTER-COLLECTOR VOLTAGE  $V_{EC}$  (V)