

Addendum

HC908LJ12AD/D
Rev. 0, 6/2003

Addendum to
MC68HC908LJ12
Technical Data



MOTOROLA
intelligence everywhere™

digital dna*

This addendum provides information to the following MCU devices:

- **MC68HLC908LJ12** (see page 1)
- **MC68HC08LJ12** (see page 9)

The entire *MC68HC908LJ12 Technical Data*, Rev. 2 (Motorola document number MC68HC908LJ12/D) applies to the these two devices, with exceptions outlined in this addendum.

Amendments to *MC68HC908LJ12/D*, Rev. 2, are documented on page 13.

MC68HLC908LJ12

The MC68HLC908LJ12 is a low-voltage version of the MC68HC908LJ12, with an operating voltage range of 2.4 to 3.3V.

FLASH Memory

The FLASH memory can be read at operating voltages from 2.4 to 3.3V. Program or erase operations require a minimum operating voltage of 2.7V.

Low-Voltage Inhibit (LVI)

The LVI module is not designed for the MC68HLC908LJ12. After an MCU reset, the LVI module is disabled (LVIPWRD = 1 in CONFIG1). The LVIPWRD bit should be left as logic 1 (the default setting).

Electrical Specifications

Electrical specifications for the MC68HLC908LJ12 device are given in the following tables.

Functional Operating
Range

Table 1. Operating Range

Characteristic	Symbol	Value		Unit
Operating temperature range	T_A	– 40 to +85		°C
Operating voltage range	V_{DD}	2.4 to 2.7	2.7 to 3.3	V
Maximum internal operating frequency	f_{OP}	2	4	MHz
Operating voltage for FLASH memory program and erase operations	V_{DD}	2.7 to 3.3		V

DC Electrical
Characteristics

Table 2. DC Electrical Characteristics (2.4 to 2.7V)

Characteristic ⁽¹⁾	Symbol	Min	Typ ⁽²⁾	Max	Unit
Output high voltage ($I_{LOAD} = -1.0$ mA) All ports	V_{OH}	$V_{DD} - 0.4$	—	—	V
Output low voltage ($I_{LOAD} = 0.8$ mA) All ports ($I_{LOAD} = 4.0$ mA) PTB2–PTB5 ($I_{LOAD} = 10.0$ mA) PTB0/TxD–PTB1	V_{OL}	—	—	0.4	V
Input high voltage All ports, \overline{RST} , \overline{IRQ} , OSC1	V_{IH}	$0.7 \times V_{DD}$	—	V_{DD}	V
Input low voltage All ports, \overline{RST} , \overline{IRQ} , OSC1	V_{IL}	V_{SS}	—	$0.3 \times V_{DD}$	V
V_{DD} supply current Run ⁽³⁾ , $f_{OP} = 2$ MHz with all modules on with ADC on with ADC off Wait ⁽⁴⁾ , $f_{OP} = 2$ MHz (all modules off) Stop, $f_{OP} = 8$ kHz ⁽⁵⁾ 25°C (with OSC, RTC, LCD ⁽⁶⁾ , LVI on) 25°C (with OSC, RTC, LCD ⁽⁶⁾ on) 25°C (with OSC, RTC on) 25°C (all modules off)	I_{DD}	— — — — — — — — — —	— — — — — — — — — —	5.2 3.8 2.8 2.3 200 27 15 1	mA mA mA mA μA μA μA μA
Digital I/O ports Hi-Z leakage current All ports, \overline{RST}	I_{IL}	—	—	± 10	μA

Table 2. DC Electrical Characteristics (2.4 to 2.7V) (Continued)

Characteristic ⁽¹⁾	Symbol	Min	Typ ⁽²⁾	Max	Unit
Input current $\overline{\text{IRQ}}$	I_{IN}	—	—	± 1	μA
Capacitance Ports (as input or output)	C_{OUT} C_{IN}	— —	— —	12 8	pF
POR re-arm voltage ⁽⁷⁾	V_{POR}	0	—	100	mV
POR rise-time ramp rate ⁽⁸⁾	R_{POR}	0.02	—	—	V/ms
Monitor mode entry voltage (at $\overline{\text{IRQ}}$ pin)	V_{HI}	$1.5 \times V_{\text{DD}}$	—	$2 \times V_{\text{DD}}$	V
Pullup resistors ⁽⁹⁾ PTA0–PTA3, PTD4–PTD7 configured as KBI0–KBI7 $\overline{\text{RST}}$, $\overline{\text{IRQ}}$	R_{PU1} R_{PU2}	— —	25 27	— —	k Ω k Ω

- $V_{\text{DD}} = 2.4$ to 2.7 Vdc, $V_{\text{SS}} = 0$ Vdc, $T_{\text{A}} = T_{\text{L}}$ to T_{H} , unless otherwise noted.
- Typical values reflect average measurements at midpoint of voltage range, 25°C only.
- Run (operating) I_{DD} measured using external square wave clock source. All inputs 0.2 V from rail. No dc loads. Less than 100 pF on all outputs. $C_{\text{L}} = 20$ pF on OSC2. All ports configured as inputs. OSC2 capacitance linearly affects run I_{DD} .
- Wait I_{DD} measured using external square wave clock source. All inputs 0.2 V from rail. No dc loads. Less than 100 pF on all outputs. $C_{\text{L}} = 20$ pF on OSC2. All ports configured as inputs. OSC2 capacitance linearly affects wait I_{DD} .
- The 8kHz clock is from a 32kHz clock input at OSC1, for the driving the RTC.
- LCD driver configured for low current mode.
- Maximum is highest voltage that POR is guaranteed.
- If minimum V_{DD} is not reached before the internal POR reset is released, $\overline{\text{RST}}$ must be driven low externally until minimum V_{DD} is reached.
- R_{PU1} and R_{PU2} are measured at $V_{\text{DD}} = 2.6\text{V}$.

Table 3. DC Electrical Characteristics (2.7 to 3.3V)

Characteristic ⁽¹⁾	Symbol	Min	Typ ⁽²⁾	Max	Unit
Output high voltage ($I_{\text{LOAD}} = -1.0$ mA) All ports	V_{OH}	$V_{\text{DD}} - 0.4$	—	—	V
Output low voltage ($I_{\text{LOAD}} = 0.8$ mA) All ports ($I_{\text{LOAD}} = 4.0$ mA) PTB2–PTB5 ($I_{\text{LOAD}} = 10.0$ mA) PTB0/TxD–PTB1	V_{OL}	—	—	0.4	V
Input high voltage All ports, $\overline{\text{RST}}$, $\overline{\text{IRQ}}$, OSC1	V_{IH}	$0.7 \times V_{\text{DD}}$	—	V_{DD}	V
Input low voltage All ports, $\overline{\text{RST}}$, $\overline{\text{IRQ}}$, OSC1	V_{IL}	V_{SS}	—	$0.3 \times V_{\text{DD}}$	V

Table 3. DC Electrical Characteristics (2.7 to 3.3V) (Continued)

Characteristic ⁽¹⁾	Symbol	Min	Typ ⁽²⁾	Max	Unit
V _{DD} supply current					
Run ⁽³⁾ , f _{OP} = 4 MHz		—	—	8	mA
with all modules on		—	—	6	mA
with ADC on		—	—	5	mA
with ADC off		—	—	3.5	mA
Wait ⁽⁴⁾ , f _{OP} = 4 MHz (all modules off)	I _{DD}	—	—	3.5	mA
Stop, f _{OP} = 8 kHz ⁽⁵⁾					
25°C (with OSC, RTC, LCD ⁽⁶⁾ , LVI on)		—	—	280	μA
25°C (with OSC, RTC, LCD ⁽⁶⁾ on)		—	—	38	μA
25°C (with OSC, RTC on)		—	—	15	μA
25°C (all modules off)		—	—	1	μA
Digital I/O ports Hi-Z leakage current					
All ports, $\overline{\text{RST}}$	I _{IL}	—	—	± 10	μA
Input current					
$\overline{\text{IRQ}}$	I _{IN}	—	—	± 1	μA
Capacitance					
Ports (as input or output)	C _{OUT} C _{IN}	— —	— —	12 8	pF
POR re-arm voltage ⁽⁷⁾	V _{POR}	0	—	100	mV
POR rise-time ramp rate ⁽⁸⁾	R _{POR}	0.02	—	—	V/ms
Monitor mode entry voltage (at $\overline{\text{IRQ}}$ pin)	V _{HI}	1.5 × V _{DD}	—	2 × V _{DD}	V
Pullup resistors ⁽⁹⁾					
PTA0–PTA3, PTD4–PTD7 configured as KBI0–KBI7	R _{PU1}	—	25	—	kΩ
$\overline{\text{RST}}$, $\overline{\text{IRQ}}$	R _{PU2}	—	27	—	kΩ

1. V_{DD} = 2.7 to 3.3 Vdc, V_{SS} = 0 Vdc, T_A = T_L to T_H, unless otherwise noted.
2. Typical values reflect average measurements at midpoint of voltage range, 25 °C only.
3. Run (operating) I_{DD} measured using external square wave clock source. All inputs 0.2 V from rail. No dc loads. Less than 100 pF on all outputs. C_L = 20 pF on OSC2. All ports configured as inputs. OSC2 capacitance linearly affects run I_{DD}.
4. Wait I_{DD} measured using external square wave clock source. All inputs 0.2 V from rail. No dc loads. Less than 100 pF on all outputs. C_L = 20 pF on OSC2. All ports configured as inputs. OSC2 capacitance linearly affects wait I_{DD}.
5. The 8kHz clock is from a 32kHz clock input at OSC1, for the driving the RTC.
6. LCD driver configured for low current mode.
7. Maximum is highest voltage that POR is guaranteed.
8. If minimum V_{DD} is not reached before the internal POR reset is released, $\overline{\text{RST}}$ must be driven low externally until minimum V_{DD} is reached.
9. R_{PU1} and R_{PU2} are measured at V_{DD} = 3V.

Oscillator
Characteristics

Table 4. Oscillator Specifications (2.4 to 2.7V)

Characteristic	Symbol	Min	Typ	Max	Unit
Internal oscillator clock frequency	f_{ICLK}	—	See Figure 1.	—	Hz
External reference clock to OSC1 ⁽¹⁾	f_{OSC}	dc	—	8M	Hz
Crystal reference frequency ⁽²⁾	f_{XCLK}		32.768k	4.9152M	Hz
Crystal load capacitance ⁽³⁾	C_L	—	—	—	
Crystal fixed capacitance	C_1	—	$2 \times C_L$ (25p)	—	F
Crystal tuning capacitance	C_2	—	$2 \times C_L$ (25p)	—	F
Feedback bias resistor	R_B	—	10M	—	Ω
Series resistor ⁽⁴⁾	R_S	—	100k	—	Ω

1. No more than 10% duty cycle deviation from 50%.
2. Fundamental mode crystals only.
3. Consult crystal manufacturer's data.
4. Not Required for high frequency crystals.

Table 5. Oscillator Specifications (2.7 to 3.3V)

Characteristic	Symbol	Min	Typ	Max	Unit
Internal oscillator clock frequency	f_{ICLK}	—	See Figure 1.	—	Hz
External reference clock to OSC1 ⁽¹⁾	f_{OSC}	dc	—	16M	Hz
Crystal reference frequency ⁽²⁾	f_{XCLK}		32.768k	4.9152M	Hz
Crystal load capacitance ⁽³⁾	C_L	—	—	—	
Crystal fixed capacitance	C_1	—	$2 \times C_L$ (25p)	—	F
Crystal tuning capacitance	C_2	—	$2 \times C_L$ (25p)	—	F
Feedback bias resistor	R_B	—	10M	—	Ω
Series resistor ⁽⁴⁾	R_S	—	100k	—	Ω

1. No more than 10% duty cycle deviation from 50%.
2. Fundamental mode crystals only.
3. Consult crystal manufacturer's data.
4. Not Required for high frequency crystals.


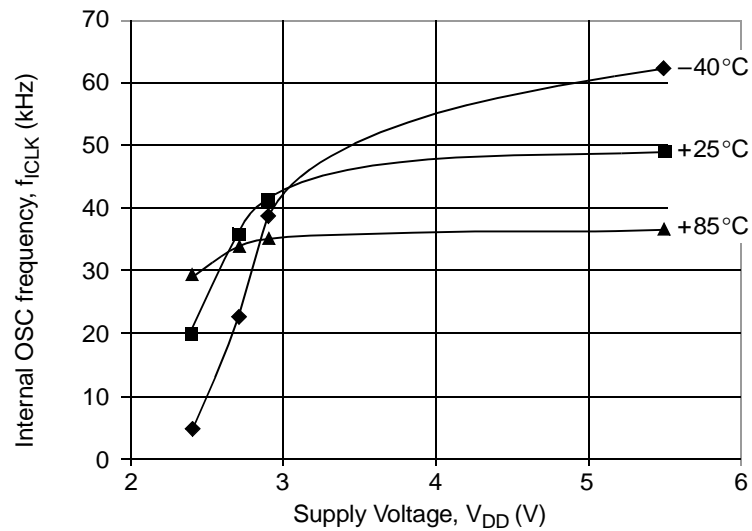


Figure 1. Typical Internal Oscillator Frequency

ADC Electrical
Characteristics

Table 6. ADC Electrical Characteristics (2.4 to 3.3V)

Characteristic	Symbol	Min	Max	Unit	Notes
Supply voltage	V _{DDA}	2.4	3.3	V	
Input range	V _{ADIN}	0	V _{DDA}	V	V _{ADIN} ≤ V _{DDA}
Resolution	B _{AD}	10	10	bits	1,024 counts
Absolute accuracy	A _{AD}	See Figure 2 and Figure 3.			Includes quantization. ±1 ADC count = ±0.5 LSB
ADC internal clock	f _{ADIC}	32 k	2 M	Hz	t _{ADIC} = 1/f _{ADIC}
Conversion range	R _{AD}	V _{REFL}	V _{REFH}	V	
ADC voltage reference high	V _{REFH}	—	V _{DDA} + 0.1	V	
ADC voltage reference low	V _{REFL}	V _{SSA} - 0.1	—	V	V _{SSA} is tied to V _{SS} internally.
Conversion time	t _{ADC}	16	17	t _{ADIC} cycles	
Sample time	t _{ADS}	5	—	t _{ADIC} cycles	
Monotonically	M _{AD}	Guaranteed			
Zero input reading	Z _{ADI}	000	001	HEX	V _{ADIN} = V _{REFL}
Full-scale reading	F _{ADI}	3FC	3FF	HEX	V _{ADIN} = V _{REFH}
Input capacitance	C _{ADI}	—	20	pF	Not tested.
Input impedance	R _{ADI}	20M	—	Ω	Measured at 5V
V _{REFH} /V _{REFL}	I _{VREF}	—	1.6	mA	Not tested.

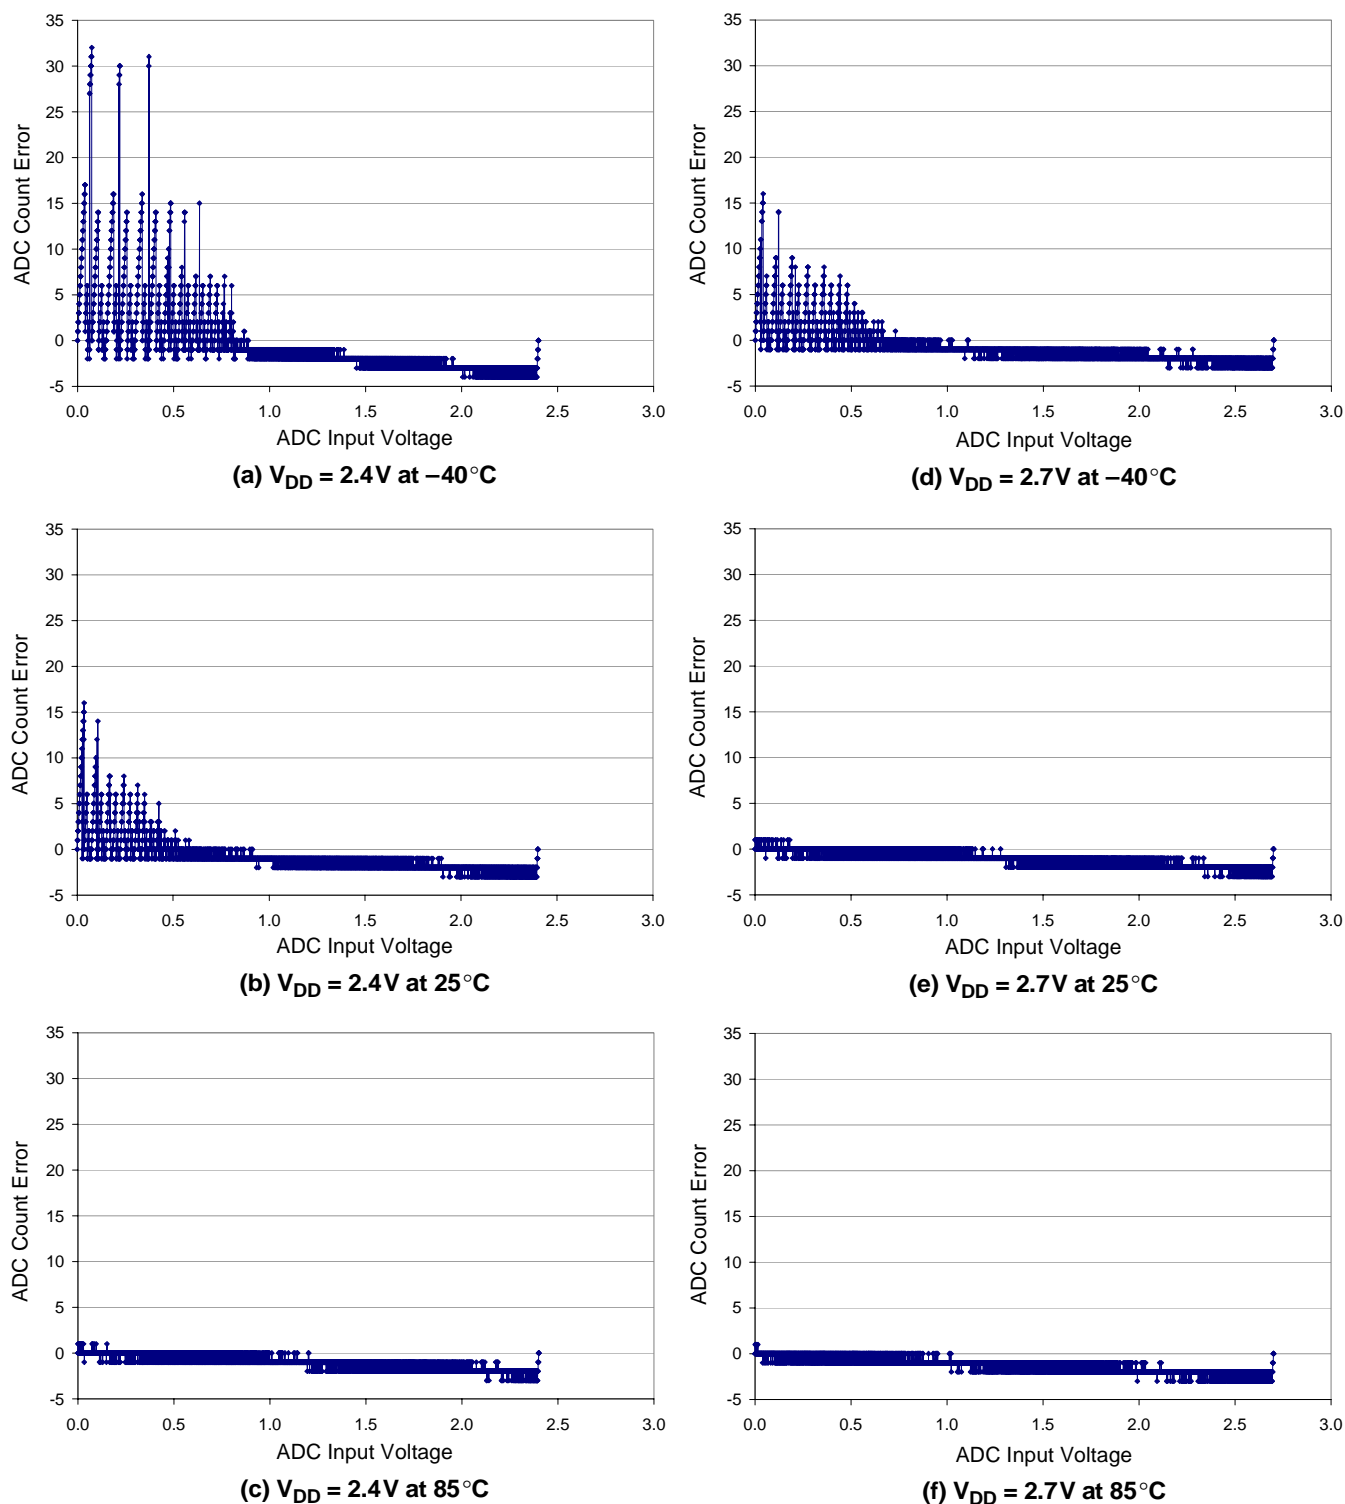

Note: ADC performance increases with increase in operating voltage and temperature.

Figure 2. Typical ADC Accuracy (2.4V and 2.7V)

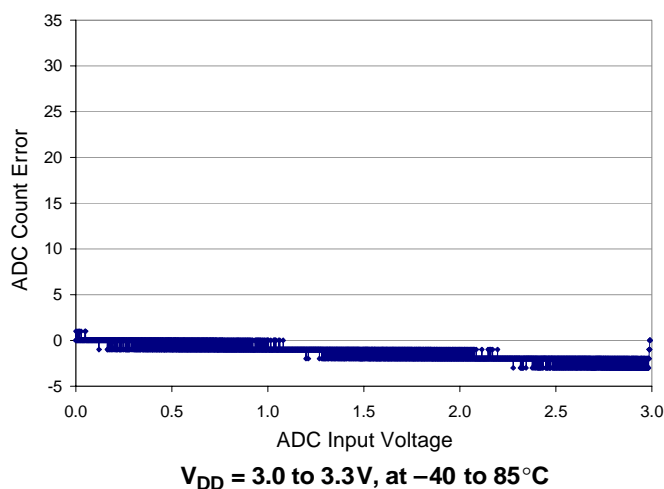


Figure 3. Typical ADC Accuracy (3V and 3.3V)

*Memory
Characteristics*

At an operating voltage of less than 2.7 V, the FLASH memory can only be read. Program and erase are achieved at an operating voltage of 2.7 to 3.3V. The program and erase parameters in the *MC68HC908LJ12 Technical Data* are for $V_{DD} = 2.7 \text{ to } 3.3\text{V}$ only.

**MC68HLC908LJ12
Order Numbers**

Table 7 shows the ordering numbers for the MC68HLC908LJ12.

Table 7. MC68HLC908LJ12 Order Numbers

MC Order Number ⁽¹⁾	Package	Operating Temperature Range
MC68HLC98LJ12CFB	52-pin LQFP	-40°C to $+85^{\circ}\text{C}$
MC68HLC98LJ12CPB	64-pin LQFP	-40°C to $+85^{\circ}\text{C}$
MC68HLC98LJ12CFU	64-pin QFP	-40°C to $+85^{\circ}\text{C}$

1. The missing "0" in "908" is intentional.

MC68HC08LJ12

The MC68HC08LJ12 is the ROM part equivalent to the MC68HC908LJ12.

Table 8. Summary of MC68HC08LJ12 and MC68HC908LJ12 Differences

	MC68HC08LJ12	MC68HC908LJ12
Operating voltages	— 5.0V ± 10%	3.3V ± 10% 5.0V ± 10%
Memory (\$C000–\$EFFF)	12,288 bytes ROM	12,288 bytes FLASH
User vectors (\$FFD0–\$FFFF)	48 bytes ROM	48 bytes FLASH
Registers at \$FE08 and \$FF09	Not used; locations are reserved.	FLASH related registers. \$FE08 — FLCR \$FF09 — FLBPR
Monitor ROM (\$FC00–\$FDFF and \$FE10–\$FFCF)	Used for testing purposes only.	Used for testing and FLASH programming/erasing.
Available packages	52-pin LQFP 64-pin LQFP 64-pin QFP	52-pin LQFP 64-pin LQFP 64-pin QFP

MCU Block Diagram **Figure 4** shows the block diagram of the MC68HC08LJ12.

Memory Map The MC68HC08LJ128 has 12,288 bytes of user ROM from \$C000 to \$EFFF, and 48 bytes of user ROM vectors from \$FFD0 to \$FFFF. On the MC68HC908LJ12 these memory locations are FLASH memory.

Figure 5 shows the memory map of the MC68HC08LJ12.

Reserved Registers The two registers at \$FE08 and \$FE09 are reserved locations on the MC68HC08LJ12.

On the MC68HC908LJ12, these two locations are the FLASH control register and the FLASH block protect register respectively.

Monitor ROM The monitor program (monitor ROM: \$FE10–\$FFCF and \$FC00–\$FDFF) on the MC68HC08LJ12 is for device testing only.

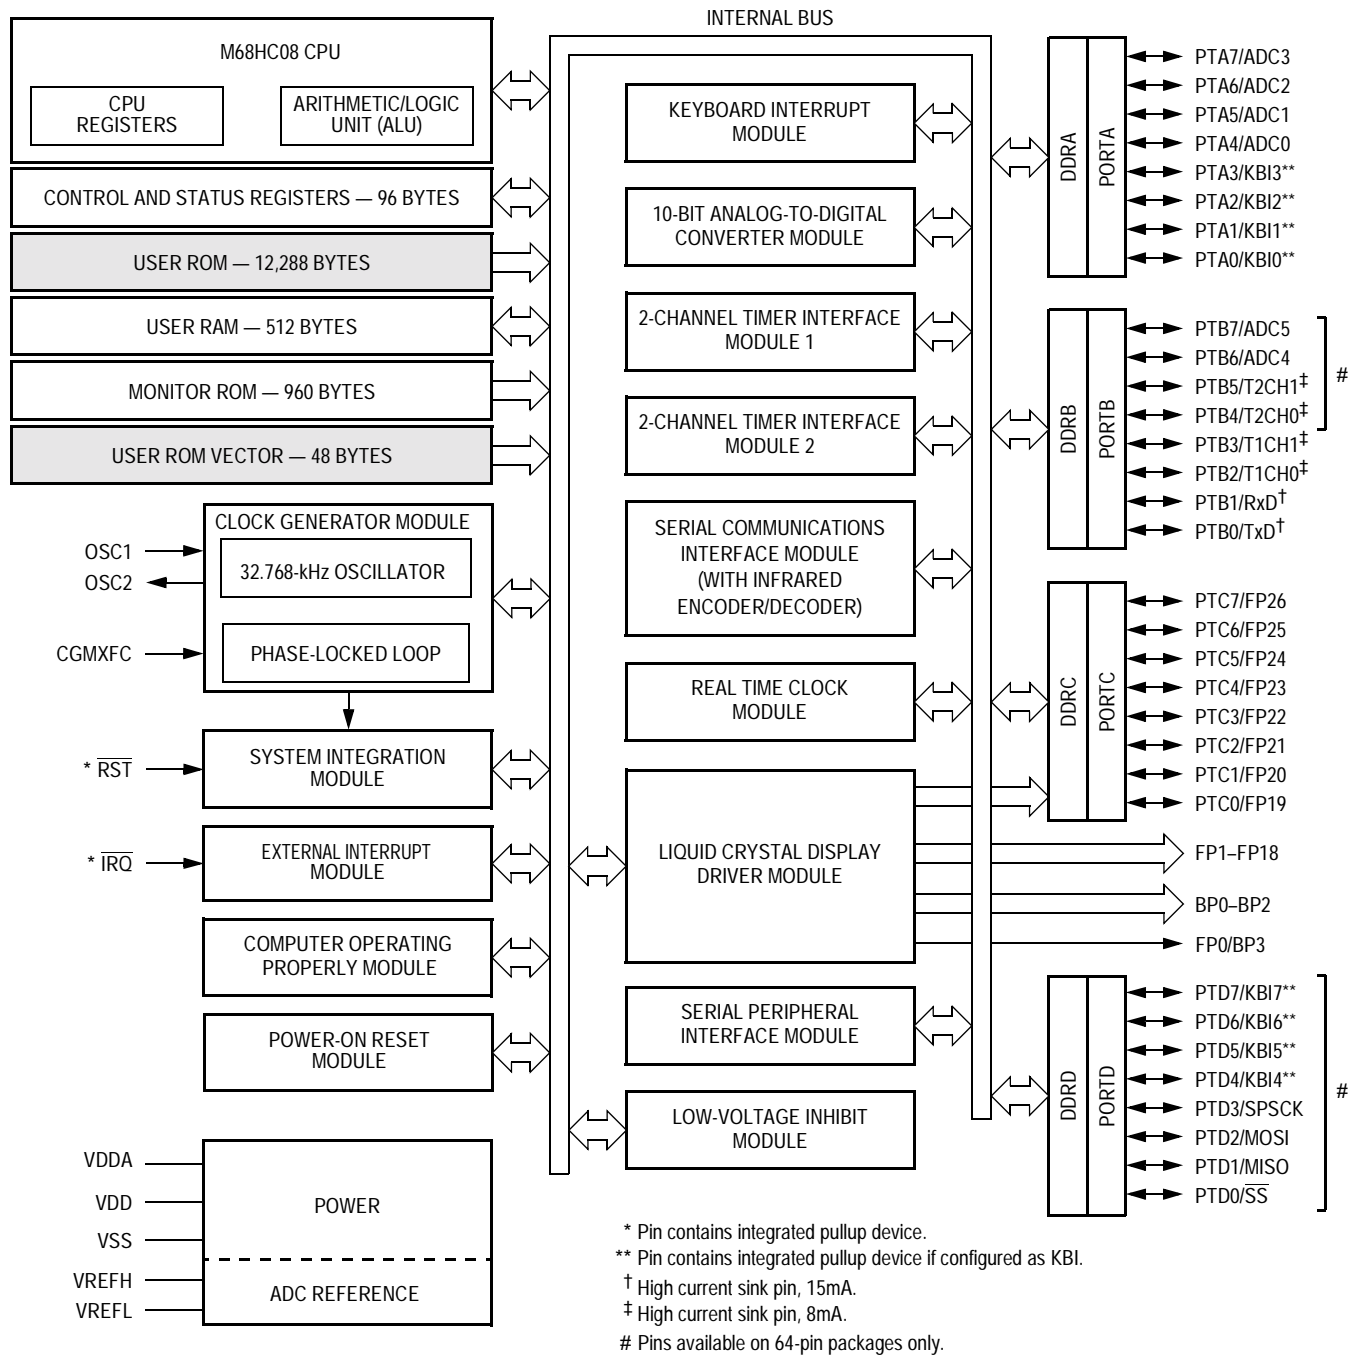


Figure 4. MC68HC08LJ12 Block Diagram

\$0000 ↓ \$005F \$0060 ↓ \$025F \$0260 ↓ \$BFFF	I/O Registers 96 Bytes
\$C000 ↓ \$EFFF \$F000 ↓ \$FBFF	RAM 512 Bytes
\$FC00 ↓ \$FDFF	Unimplemented 48,544 Bytes
\$FE00	ROM 12,288 Bytes
\$FE01	Unimplemented 3,072 Bytes
\$FE02	Monitor ROM 1 512 Bytes
\$FE03	SIM Break Status Register (SBSR)
\$FE04	SIM Reset Status Register (SRSR)
\$FE05	Reserved
\$FE06	SIM Break Flag Control Register (SBFCR)
\$FE07	Interrupt Status Register 1 (INT1)
\$FE08	Interrupt Status Register 2 (INT2)
\$FE09	Interrupt Status Register 3 (INT3)
\$FE0A	Reserved
\$FE0B	Reserved
\$FE0C	Reserved
\$FE0D	Reserved
\$FE0E	Break Address Register High (BRKH)
\$FE0F	Break Address Register Low (BRKL)
\$FE10	Break Status and Control Register (BRKSCR)
\$FFC0	LVI Status Register (LVISR)
\$FFD0 ↓ \$FFFF	Monitor ROM 2 448 Bytes
	ROM Vectors 48 Bytes

Figure 5. MC68HC08LJ12 Memory Map

Electrical Specifications

Electrical specifications for the MC68HC908LJ12 apply to the MC68HC08LJ12 except for the parameters indicated below.

Functional Operating Range

Table 9. Operating Range

Characteristic	Symbol	Value	Unit
Operating temperature range	T_A	–40 to +85	°C
Operating voltage range	V_{DD}	5.0V \pm 10%	V

RAM Memory Characteristics

Table 10. Memory Characteristics

Characteristic	Symbol	Min.	Max.	Unit
RAM data retention voltage	V_{RDR}	1.3	—	V

Notes:

Since MC68HC08LJ12 is a ROM device, FLASH memory electrical characteristics do not apply.

MC68HC08LJ12 Order Numbers

These part numbers are generic numbers only. To place an order, ROM code must be submitted to the ROM Processing Center (RPC).

Table 11. MC68HC08LJ12 Order Numbers

MC Order Number	Package	Operating Temperature Range
MC68HC08LJ12CFB	52-pin LQFP	–40 °C to +85 °C
MC68HC08LJ12CPB	64-pin LQFP	–40 °C to +85 °C
MC68HC08LJ12CFU	64-pin QFP	–40 °C to +85 °C

AMENDMENTS TO MC68HC908LJ12/D, REV. 2

5.0V DC Electrical Characteristics

Pages 394 and 395, **Table 23-4 5.0V DC Electrical Characteristics** —
Delete LVI typical values and correct note 6.

From:

Characteristic	Symbol	Min	Typ	Max	Unit
Low-voltage inhibit, trip falling voltage	V_{TRIPF}	4.00	4.32	4.70	V
Low-voltage inhibit, trip rising voltage	V_{TRIPR}	4.00	4.32	4.70	V

Notes:

6. LCD driver configured for high current mode.

To:

Characteristic	Symbol	Min	Typ	Max	Unit
Low-voltage inhibit, trip falling voltage	V_{TRIPF}	4.00	—	4.70	V
Low-voltage inhibit, trip rising voltage	V_{TRIPR}	4.00	—	4.70	V

Notes:

6. LCD driver configured for low current mode.

3.3V DC Electrical Characteristics

Pages 396 and 397, **Table 23-5 3.3V DC Electrical Characteristics** —
Delete LVI typical values and correct note 6.

From:

Characteristic	Symbol	Min	Typ	Max	Unit
Low-voltage inhibit, trip falling voltage	V_{TRIPF}	2.40	2.57	2.88	V
Low-voltage inhibit, trip rising voltage	V_{TRIPR}	2.46	2.63	2.97	V

Notes:

6. LCD driver configured for high current mode.

To:

Characteristic	Symbol	Min	Typ	Max	Unit
Low-voltage inhibit, trip falling voltage	V_{TRIPF}	2.40	—	2.88	V
Low-voltage inhibit, trip rising voltage	V_{TRIPR}	2.46	—	2.97	V

Notes:

6. LCD driver configured for low current mode.

**Oscillator
Characteristics**

Page 398, **Table 23-8 5.0V Oscillator Specifications** and **Table 23-9 3.3V Oscillator Specifications** — Replace *Internal oscillator clock frequency* values.

From:

Characteristic	Symbol	Min	Typ	Max	Unit
Internal oscillator clock frequency	f_{ICLK}	46k	47k	48k	Hz

Characteristic	Symbol	Min	Typ	Max	Unit
Internal oscillator clock frequency	f_{ICLK}	42.8k	43.4k	44k	Hz

To: See **Figure 1 . Typical Internal Oscillator Frequency** on page 6 of this document.

— END —

Freescale Semiconductor, Inc.

HOW TO REACH US:

USA/EUROPE/LOCATIONS NOT LISTED:

Motorola Literature Distribution
P.O. Box 5405, Denver, Colorado 80217
1-800-521-6274 or 480-768-2130

JAPAN:

Motorola Japan Ltd.; SPS, Technical Information Center
3-20-1, Minami-Azabu Minato-ku, Tokyo 106-8573 Japan
81-3-3440-3569

ASIA/PACIFIC:

Motorola Semiconductors H.K. Ltd.
Silicon Harbour Centre, 2 Dai King Street
Tai Po Industrial Estate, Tai Po, N.T., Hong Kong
852-26668334

HOME PAGE:

<http://motorola.com/semiconductors>

Information in this document is provided solely to enable system and software implementers to use Motorola products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part.



MOTOROLA

Motorola and the Stylized M Logo are registered in the U.S. Patent and Trademark Office. digital dna is a trademark of Motorola, Inc. All other product or service names are the property of their respective owners. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

© Motorola, Inc. 2003

HC908LJ12AD/D
Rev. 0
6/2003

**For More Information On This Product,
Go to: www.freescale.com**