

## The RF Line PNP Silicon High-Frequency Transistor

Designed primarily for use in the high-gain, low-noise small-signal amplifiers for operation up to 3.5 GHz. Also usable in applications requiring fast switching times.

- High Current Gain-Bandwidth Product —  
 $f_T = 3.4 \text{ GHz (Typ) @ } I_C = -35 \text{ mAdc (MMBR521LT1)}$   
 $f_T = 4.2 \text{ GHz (Typ) @ } I_C = -50 \text{ mAdc (MRF5211LT1)}$
- Low Noise Figure @  $f = 1.0 \text{ GHz}$  —  
 $NF(\text{matched}) = 2.5 \text{ dB (Typ) (MMBR521LT1)}$   
 $NF(\text{matched}) = 2.8 \text{ dB (Typ) (MRF5211LT1)}$
- High Power Gain —  $G_{pe}(\text{matched}) = 11 \text{ dB (Typ)}$
- Guaranteed RF Parameters
- Surface Mounted SOT-23 (MMBR521LT1) & SOT-143 (MRF5211LT1)  
 Offer Improved RF Performance  
 Lower Package Parasitics  
 Higher Gain
- Available in tape and reel packaging options:  
 T1 suffix = 3,000 units per reel

### MAXIMUM RATINGS

Ratings	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO}$	-10	Vdc
Collector-Base Voltage	$V_{CBO}$	-20	Vdc
Emitter-Base Voltage	$V_{EBO}$	-2.5	Vdc
Power Dissipation (1) $T_C = 75^\circ\text{C}$ , Derate linearly above $T_C = 75^\circ\text{C}$ @ All	$P_D(\text{max})$	0.333 4.44	W mW/°C
Collector Current — Continuous	$I_C$	-70	mA
Maximum Junction Temperature	$T_{J\text{max}}$	150	°C
Storage Temperature All	$T_{\text{stg}}$	-55 to +150	°C

### THERMAL CHARACTERISTICS

Ratings	Symbol	Value	Unit
Thermal Resistance, Junction to Case (MMBR521LT1, MRF5211LT1)	$R_{\theta JC}$	225	°C/W

### DEVICE MARKING


MMBR521LT1 = 7M	MRF5211LT1 = 04
-----------------	-----------------

#### NOTE:


- Case Temperature is measured on the collector lead closest to the package. For case temperatures above  $+75^\circ\text{C}$ :  $P_{\text{DISP}}(\text{max}) = (T_{J\text{max}} - T_C) / R_{\theta JC}$

**MMBR521LT1**  
**MRF5211LT1**

$I_C = -70 \text{ mA}$   
**HIGH-FREQUENCY**  
**TRANSISTOR**  
**PNP SILICON**



**CASE 318-08, STYLE 6**  
**SOT-23**  
**LOW PROFILE**  
**(TO-236AA/AB)**  
**MMBR521LT1**



**CASE 318A-05, STYLE 1**  
**SOT-143**  
**LOW PROFILE**  
**MRF5211LT1**

# **ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
<b>OFF CHARACTERISTICS</b>					
Collector-Emitter Breakdown Voltage ( $I_C = -1.0\text{ mA}$ , $I_B = 0$ )	$V_{(BR)CEO}$	-10	-12	—	Vdc
Collector-Base Breakdown Voltage ( $I_C = -0.1\text{ mA}$ , $I_E = 0$ )	$V_{(BR)CBO}$	-20	—	—	Vdc
Emitter-Base Breakdown Voltage ( $I_E = -50\text{ }\mu\text{A}$ , $I_C = 0$ )	$V_{(BR)EBO}$	-2.5	—	—	Vdc
Collector Cutoff Current ( $V_{CB} = -8.0\text{ Vdc}$ , $I_E = 0$ )	$I_{CBO}$	—	—	-10	$\mu\text{A}$

## **ON CHARACTERISTICS**

DC Current Gain ( $I_C = -30\text{ mA}$ , $V_{CE} = -5.0\text{ Vdc}$ )	$h_{FE}$	25	—	125	—
--	----------	----	---	-----	---


## **DYNAMIC CHARACTERISTICS**

Collector-Base Capacitance ( $V_{CB} = -6.0\text{ Vdc}$ , $I_E = 0$ , $f = 1.0\text{ MHz}$ )	$C_{cb}$	—	1.0	1.5	pF
Current Gain — Bandwidth Product ( $V_{CE} = -8.0\text{ V}$ , $I_C = -35\text{ mA}$ , $f = 1.0\text{ GHz}$ ) ( $V_{CE} = -8.0\text{ V}$ , $I_C = -50\text{ mA}$ , $f = 1.0\text{ GHz}$ )	$f_T$	—	3.4	—	GHz
		—	4.2	—	


## **FUNCTIONAL TESTS**

Power Gain at Minimum Noise Figure ( $V_{CE} = -6.0\text{ V}$ , $I_C = -5.0\text{ mA}$ , $f = 500\text{ MHz}$ ) ( $V_{CE} = -6.0\text{ V}$ , $I_C = -5.0\text{ mA}$ , $f = 1.0\text{ GHz}$ ) ( $V_{CE} = -6.0\text{ V}$ , $I_C = -5.0\text{ mA}$ , $f = 1.0\text{ GHz}$ )	$G_{NFmin}$	13	15	—	dB
		8.0	10	—	
		10	11	—	
		—	—	—	
Noise Figure — Minimum ( $V_{CE} = -6.0\text{ V}$ , $I_C = -5.0\text{ mA}$ , $f = 500\text{ MHz}$ ) ( $V_{CE} = -6.0\text{ V}$ , $I_C = -5.0\text{ mA}$ , $f = 1.0\text{ GHz}$ ) ( $V_{CE} = -6.0\text{ V}$ , $I_C = -5.0\text{ mA}$ , $f = 1.0\text{ GHz}$ )	$NF_{min}$	—	1.5	2.5	dB
		—	2.5	3.5	
		—	2.8	3.5	
		—	—	—	


## **TYPICAL CHARACTERISTICS**

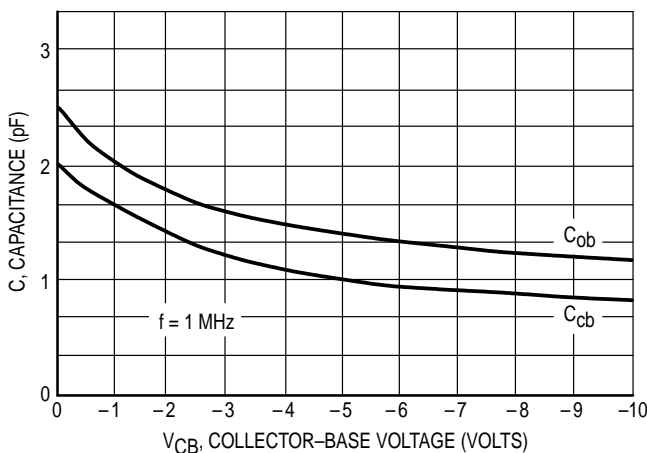

**Figure 1. Junction Capacitance versus Voltage**

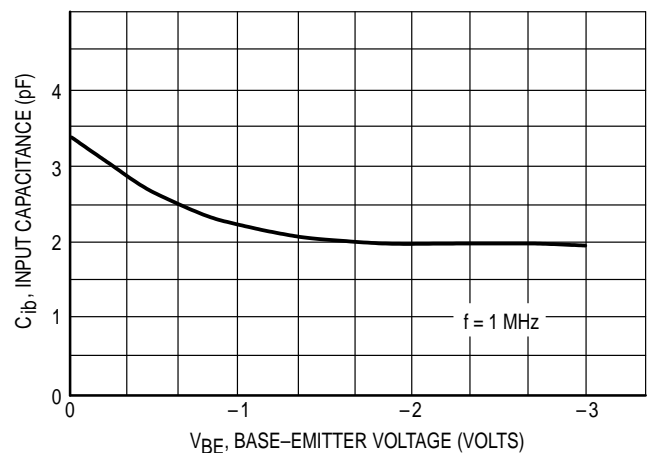


**Figure 2. Input Capacitance versus Voltage**

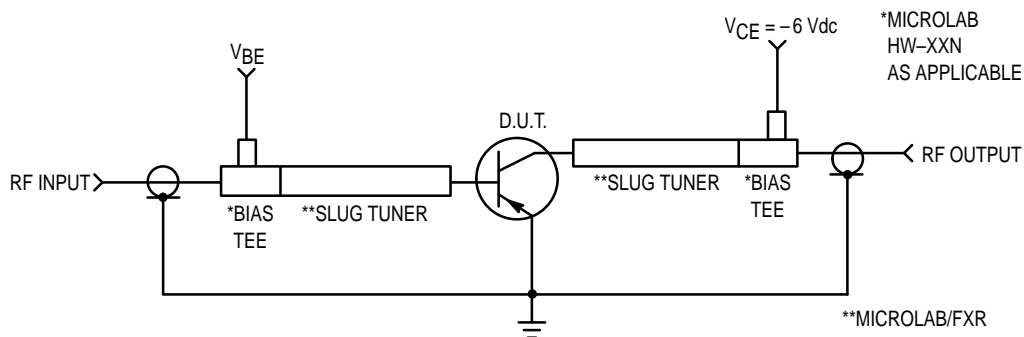


**Figure 3. Functional Circuit Schematic**


# **TYPICAL CHARACTERISTICS** **MMBR521LT1**

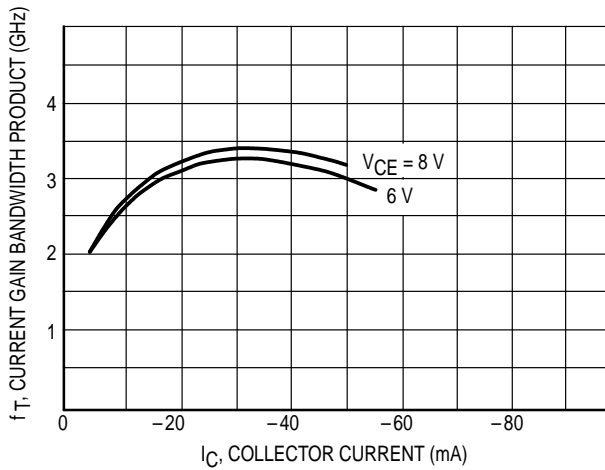


**Figure 4. Current Gain Bandwidth Product versus Collector Current**

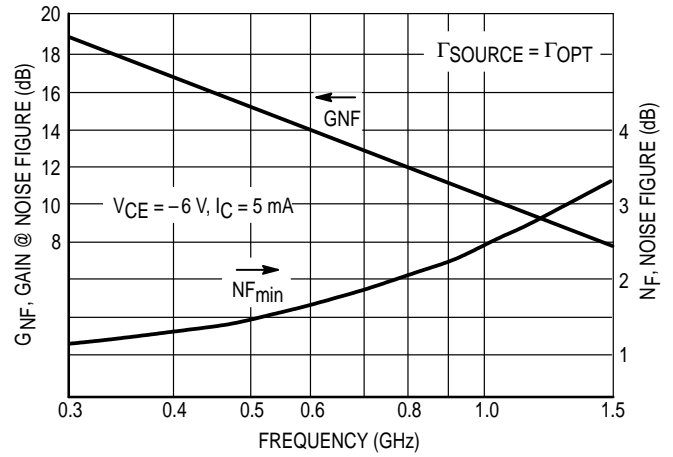

**Figure 5. Minimum Noise Figure & Gain @ Noise Figure versus Frequency**

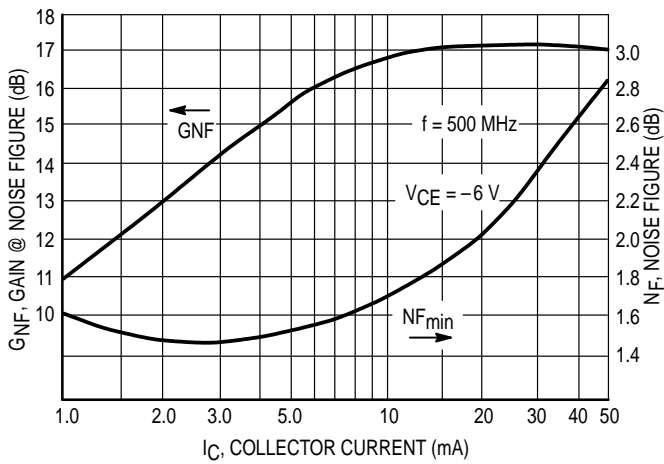


**Figure 6. Minimum Noise Figure & Gain @ Noise Figure versus Collector Current**

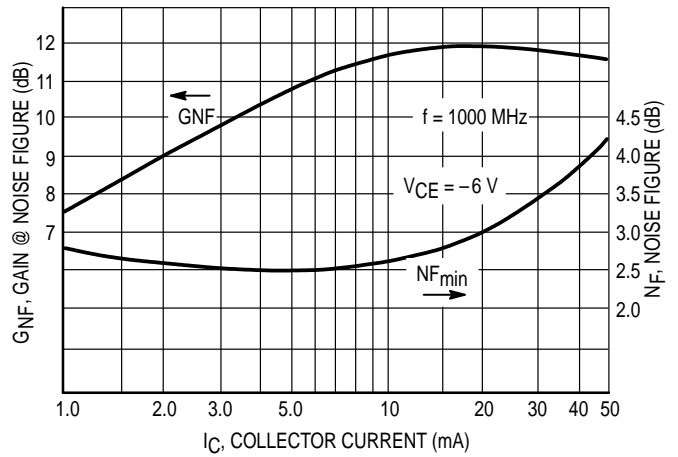


**Figure 7. Minimum Noise Figure & Gain @ Noise Figure versus Collector Current**

# **TYPICAL CHARACTERISTICS** **MRF5211LT1**

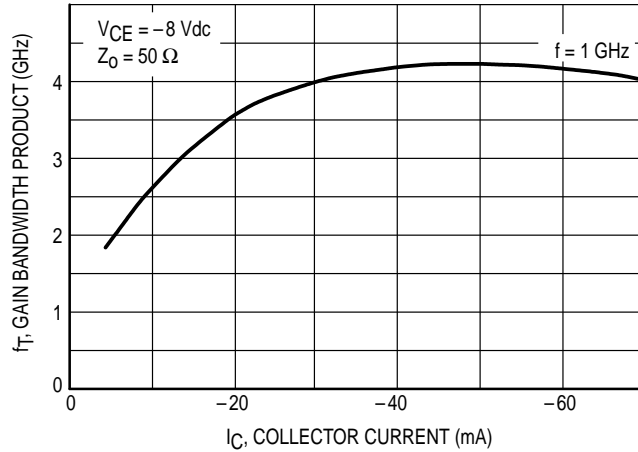


**Figure 8. Gain–Bandwidth Product versus Current**

## **GAIN AND NOISE FIGURE versus FREQUENCY**

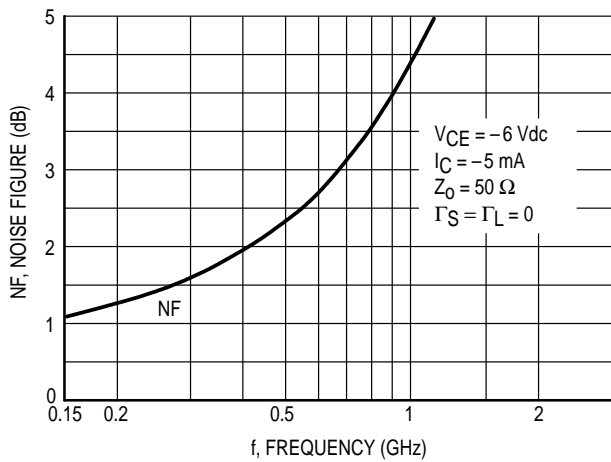


**Figure 9. 50 Ohm Noise Figure**

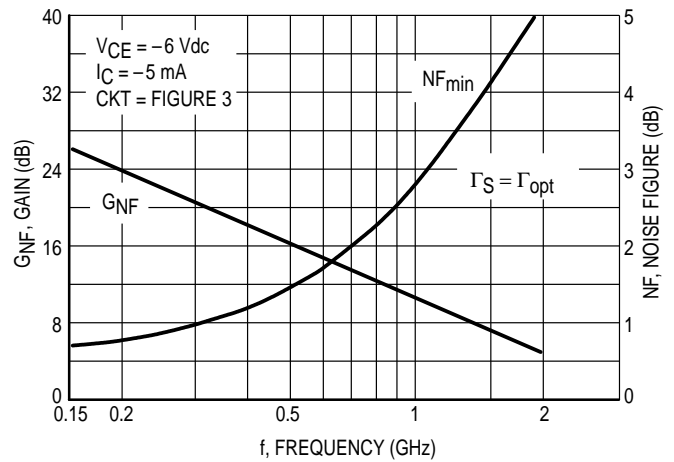


**Figure 10. Tuned Circuit**

## **GAIN AND NOISE FIGURE versus CURRENT**

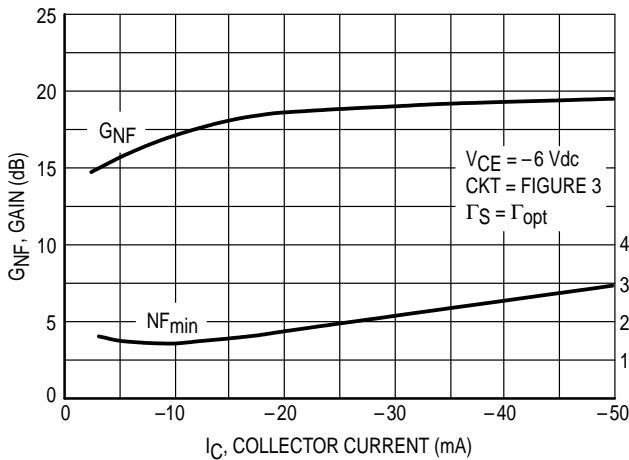


**Figure 11. Tuned Circuit — Frequency 500 MHz**

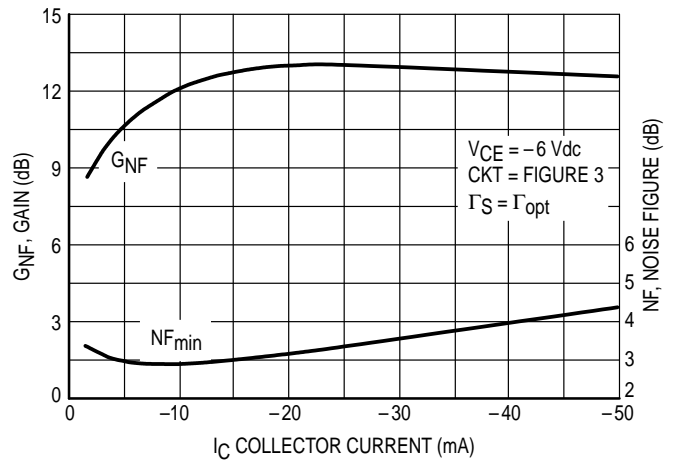


**Figure 12. Tuned Circuit — Frequency 1.0 GHz**

**TYPICAL CHARACTERISTICS — continued**  
**MRF5211LT1**

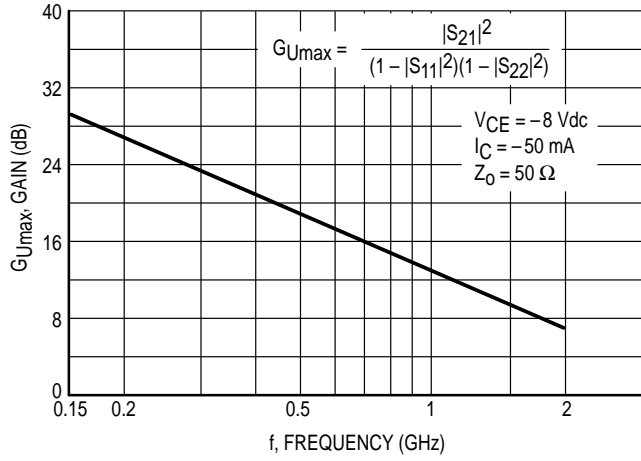

**Figure 13.  $G_{Umax}$  versus Current**

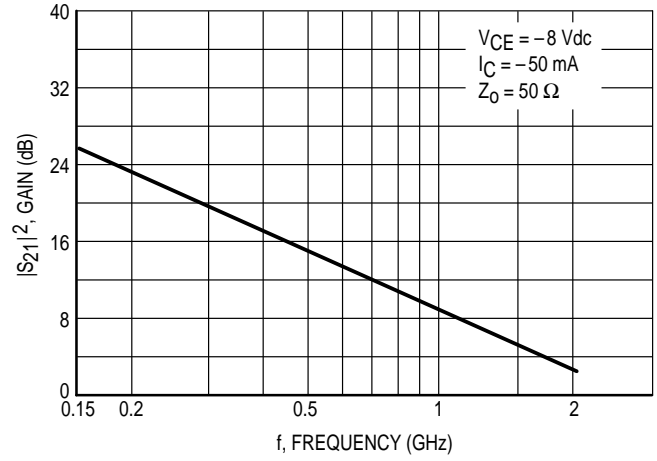

**Figure 14. Insertion Gain versus Frequency**


V <sub>CE</sub> (Vdc)	I <sub>C</sub> (mA)	f (MHz)	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
			S <sub>11</sub>	∠φ	S <sub>21</sub>	∠φ	S <sub>12</sub>	∠φ	S <sub>22</sub>	∠φ
6	5	100	0.754	-67	11.453	141	0.040	59	0.818	-24
		300	0.683	-132	6.106	105	0.065	39	0.549	-37
		500	0.667	-157	3.954	89	0.071	39	0.472	-40
		700	0.660	-171	2.890	78	0.078	44	0.452	-44
		900	0.656	179	2.294	69	0.085	50	0.449	-49
		1000	0.654	175	2.086	65	0.091	53	0.451	-52
		1500	0.641	158	1.442	48	0.130	64	0.480	-66
		2000	0.672	140	1.108	36	0.188	69	0.466	-79
		2500	0.681	124	0.917	26	0.261	66	0.483	-94
		3000	0.681	110	0.793	18	0.343	60	0.493	-110
		3500	0.686	96	0.716	13	0.426	52	0.500	-126
		4000	0.683	84	0.674	9	0.503	43	0.502	-143
		4500	0.678	73	0.653	6	0.568	34	0.503	-160
		5000	0.669	64	0.653	3	0.620	24	0.507	-176
	10	100	0.632	-92	16.621	131	0.032	55	0.694	-33
		300	0.618	-149	7.460	98	0.050	47	0.417	-41
		500	0.618	-168	4.671	85	0.061	53	0.358	-44
		700	0.616	-178	3.392	76	0.076	58	0.346	-47
		900	0.615	173	2.672	68	0.092	62	0.347	-52
		1000	0.613	170	2.429	64	0.100	63	0.352	-55
		1500	0.601	155	1.677	48	0.150	66	0.382	-68
		2000	0.633	138	1.294	36	0.208	66	0.371	-80
		2500	0.642	124	1.078	25	0.273	62	0.391	-94
		3000	0.646	110	0.929	16	0.346	56	0.408	-109
		3500	0.656	98	0.827	10	0.422	49	0.421	-124
		4000	0.662	86	0.756	4	0.494	41	0.431	-141
		4500	0.664	75	0.709	1	0.554	32	0.442	-158
		5000	0.664	66	0.683	-3	0.609	24	0.455	-174
	50	100	0.547	-149	21.107	115	0.017	63	0.441	-43
		300	0.606	-174	7.891	90	0.037	68	0.260	-42
		500	0.616	177	4.811	80	0.058	73	0.239	-44
		700	0.616	171	3.480	72	0.080	73	0.242	-48
		900	0.616	165	2.746	65	0.102	73	0.248	-54
		1000	0.615	163	2.479	61	0.113	72	0.255	-57
		1500	0.606	150	1.717	46	0.169	69	0.293	-71
		2000	0.643	135	1.327	33	0.229	65	0.289	-82
		2500	0.654	122	1.097	22	0.292	60	0.315	-96
		3000	0.662	108	0.940	13	0.359	54	0.337	-110
		3500	0.672	96	0.825	6	0.427	47	0.356	-126
		4000	0.680	84	0.743	1	0.493	39	0.373	-142
		4500	0.682	74	0.688	-2	0.551	31	0.391	-159
		5000	0.679	64	0.658	-5	0.601	22	0.409	-175
10	5	100	0.792	-59	11.498	144	0.036	62	0.848	-21
		300	0.681	-123	6.513	108	0.061	41	0.598	-32
		500	0.652	-150	4.278	91	0.068	40	0.518	-36
		700	0.639	-166	3.142	80	0.073	44	0.496	-39
		900	0.631	-177	2.491	71	0.081	49	0.489	-44
		1000	0.628	179	2.264	67	0.086	53	0.492	-46
		1500	0.616	161	1.560	50	0.120	64	0.514	-58
		2000	0.644	142	1.199	37	0.171	69	0.500	-70
		2500	0.654	126	0.985	26	0.238	68	0.516	-83
		3000	0.661	111	0.843	18	0.314	63	0.523	-98
		3500	0.670	98	0.749	12	0.399	56	0.529	-113
		4000	0.672	85	0.690	8	0.479	47	0.528	-129
		4500	0.671	73	0.656	5	0.549	38	0.524	-146
		5000	0.665	63	0.649	3	0.609	28	0.523	-162
10	10	100	0.666	-80	17.255	135	0.030	58	0.738	-28
		300	0.596	-141	8.143	101	0.047	48	0.465	-37
		500	0.587	-162	5.139	87	0.059	53	0.404	-38
		700	0.581	-174	3.741	78	0.072	58	0.388	-41
		900	0.578	177	2.947	70	0.086	61	0.387	-45
		1000	0.577	174	2.670	66	0.095	63	0.389	-48
		1500	0.565	158	1.856	50	0.139	66	0.413	-60
		2000	0.596	140	1.431	38	0.191	66	0.402	-70
		2500	0.608	126	1.177	26	0.253	64	0.420	-82
		3000	0.619	112	1.008	17	0.319	59	0.434	-96
		3500	0.632	99	0.886	9	0.393	52	0.444	-110
		4000	0.644	87	0.797	3	0.465	44	0.453	-126
		4500	0.652	75	0.732	-1	0.532	36	0.457	-143
		5000	0.654	65	0.694	-4	0.589	28	0.465	-159

Table 1. MMBR521LT1 Common Emitter S-Parameters

V <sub>CE</sub> (V <sub>dc</sub> )	I <sub>C</sub> (mA)	f (MHz)	S <sub>11</sub>		S <sub>21</sub>		S <sub>12</sub>		S <sub>22</sub>	
			S <sub>11</sub>	∠φ	S <sub>21</sub>	∠φ	S <sub>12</sub>	∠φ	S <sub>22</sub>	∠φ
-6.0	-5.0	200	0.82	-114	7.9	118	0.07	35	0.59	-46
		500	0.81	-158	4.0	88	0.08	21	0.40	-54
		1000	0.79	175	2.0	67	0.08	21	0.37	-68
		1500	0.76	158	1.3	50	0.07	30	0.43	-82
		2000	0.74	143	1.0	38	0.08	47	0.47	-95
	-10	200	0.78	-137	10.6	109	0.05	32	0.43	-63
		500	0.79	-168	4.9	84	0.06	28	0.26	-75
		1000	0.77	169	2.5	66	0.06	39	0.24	-87
		1500	0.74	155	1.6	50	0.08	49	0.29	-97
		2000	0.71	140	1.2	39	0.10	55	0.32	-106
	-50	200	0.77	-167	13.1	99	0.02	45	0.26	-108
		500	0.77	176	5.7	80	0.04	57	0.18	-132
		1000	0.76	161	2.8	65	0.06	65	0.17	-142
		1500	0.73	149	1.9	51	0.08	67	0.19	-137
		2000	0.70	136	1.4	40	0.12	65	0.20	-137
-8.0	-5.0	200	0.82	-109	8.1	119	0.07	36	0.62	-43
		500	0.80	-154	4.2	90	0.08	22	0.42	-52
		1000	0.78	175	2.2	67	0.08	22	0.38	-65
		1500	0.75	159	1.4	50	0.07	31	0.43	-78
		2000	0.72	143	1.0	37	0.09	43	0.46	-89
	-10	200	0.77	-132	11.2	110	0.05	33	0.45	-61
		500	0.77	-167	5.2	86	0.06	29	0.27	-70
		1000	0.76	169	2.6	67	0.06	39	0.25	-81
		1500	0.73	155	1.7	51	0.07	49	0.29	-90
		2000	0.70	140	1.3	39	0.10	54	0.31	-98
	-50	200	0.75	-164	14.2	100	0.02	43	0.26	-101
		500	0.76	178	6.1	82	0.04	55	0.17	-121
		1000	0.75	163	3.1	67	0.06	64	0.15	-131
		1500	0.72	151	2.0	53	0.08	67	0.18	-126
		2000	0.70	139	1.5	42	0.11	68	0.19	-127

Table 2. MRF5211LT1 Common Emitter S-Parameters

## PACKAGE DIMENSIONS

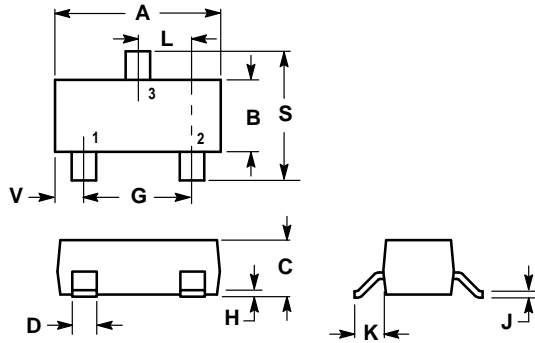

### NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.1102	0.1197	2.80	3.04
B	0.0472	0.0551	1.20	1.40
C	0.0350	0.0440	0.89	1.11
D	0.0150	0.0200	0.37	0.50
G	0.0701	0.0807	1.78	2.04
H	0.0005	0.0040	0.013	0.100
J	0.0034	0.0070	0.085	0.177
K	0.0140	0.0285	0.35	0.69
L	0.0350	0.0401	0.89	1.02
S	0.0830	0.1039	2.10	2.64
V	0.0177	0.0236	0.45	0.60

### STYLE 6:

- PIN 1. BASE
2. EMITTER
3. COLLECTOR

**CASE 318-08  
ISSUE AE**

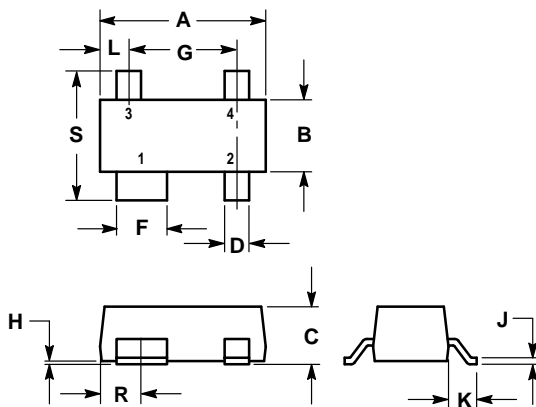

### NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.80	3.04	0.110	0.120
B	1.20	1.39	0.047	0.055
C	0.84	1.14	0.033	0.045
D	0.39	0.50	0.015	0.020
F	0.79	0.93	0.031	0.037
G	1.78	2.03	0.070	0.080
H	0.013	0.10	0.0005	0.004
J	0.08	0.15	0.003	0.006
K	0.46	0.60	0.018	0.024
L	0.445	0.60	0.0175	0.024
R	0.72	0.83	0.028	0.033
S	2.11	2.48	0.083	0.098

### STYLE 1:

- PIN 1. COLLECTOR
2. EMITTER
3. EMITTER
4. BASE

**CASE 318A-05  
ISSUE J**

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

### How to reach us:

**USA/EUROPE:** Motorola Literature Distribution;  
P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447

**MFAX:** RMFAX0@email.sps.mot.com - TOUCHTONE (602) 244-6609  
**INTERNET:** http://Design-NET.com

**JAPAN:** Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, Toshikatsu Otsuki,  
6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

**HONG KONG:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298



MMBR521LT1/D

