
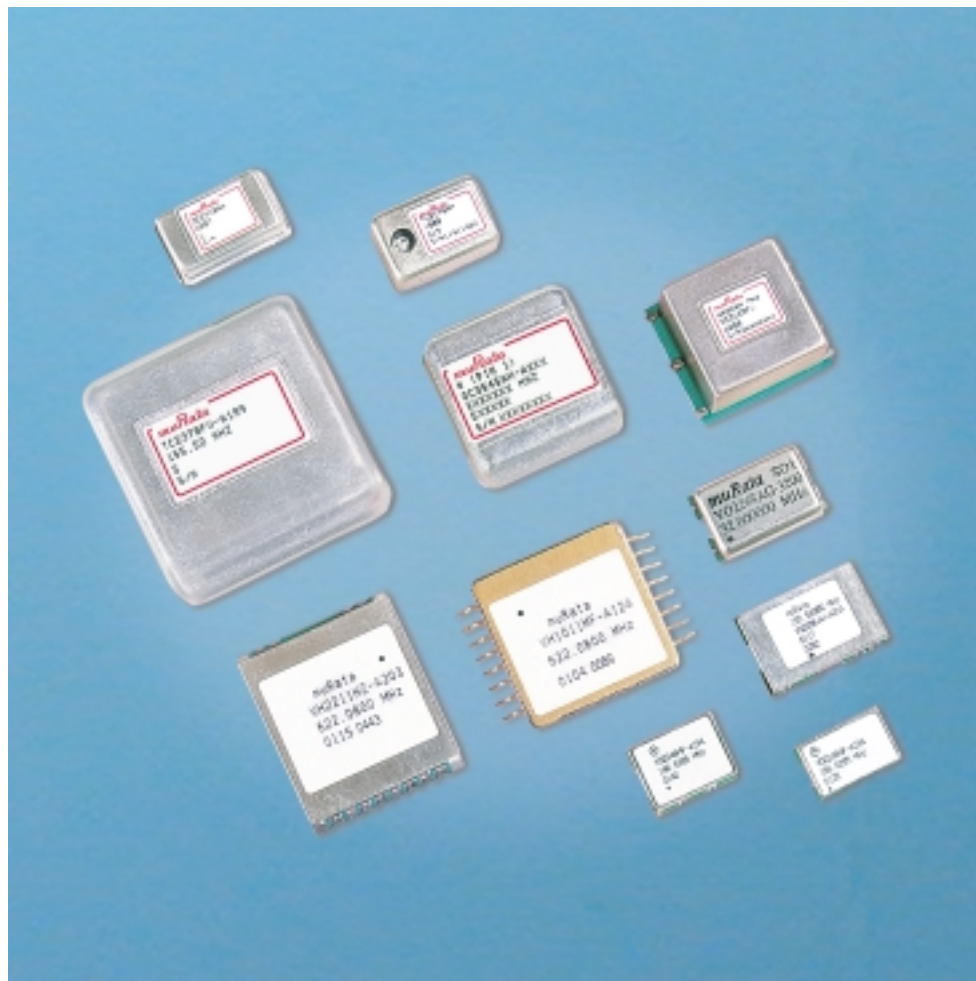


OSCILLATOR PRODUCTS CATALOG

O-20-A

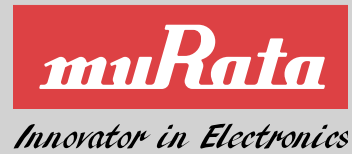

Please visit our website
www.murata.com

CONTENTS

| | |
|----------------------------------------------------------------------------|-------|
| Introduction and Standards | 1-4 |
| RFQ Form/Quick Quote..... | 5 |
| Part Numbering System | 6 |
| 1 Temperature Compensating High Stability Crystal Oscillators | 7-12 |
| 2 Voltage Controlled Oscillators..... | 13-18 |
| 3 Ovenized Crystal Oscillators..... | 19-25 |
| 4 Surface Mount Crystal Oscillators | 26-28 |
| 5 Digitally Compensated Crystal Oscillators..... | 29 |
| 6 Microwave Oscillators – VCO | 30-31 |
| 7 Phase Lock Loop Modules | 32-33 |

If you have any questions concerning Crystal Oscillator products
please contact:

Murata Electronics N.A., Inc.
State College Operations
1900 West College Avenue
State College, PA 16801-2799
Phone: 814-237-1431
Fax: 814-238-0490

Quality Control

Murata Electronics' Quality Control Department maintains product quality at a level equal to the company's high standards of performance and workmanship, which are certified to ISO-9001 and ISO-14000 requirements. The department is vested with the authority to exercise control over every phase of the manufacturing process. This control extends from incoming inspection of purchased material to in-process inspection, inspection of final product, packaging and shipping.



Environmental Testing

Product quality is guaranteed by our Quality Assurance Program. Many oscillators are custom designed to meet your needs.

Standard oscillator design parameters are:

Storage Temperature: -55°C to +85°C
(to +125°C Optional)

Vibration: 10G's, 10 to 500Hz
MIL-STD-202, Method 204

Shock: Test condition A
30g, 11msec., 1/2 sine
MIL-STD-202, Method 213,
Test Condition J

Altitude: Sea Level to space per
MIL-STD-202, Method 105

Seal: MIL-STD-202, Method 112
Test Condition D

More stringent specification levels are available. Consult our factory for details.

Other environmental conditions encountered by oscillators should be specified so that we may design units to meet your requirements. Such conditions would include soldering profiles, board washing, exposure to moisture, corrosive atmospheres, solvents, etc.

Standard environmental tests are conducted on site in the Corporate QA laboratory. Specialized environmental tests are conducted at independent testing laboratories.



Introduction and Standards

MURATA ELECTRONICS MANUFACTURES A COMPLETE LINE OF OSCILLATORS

We are a volume producer of TTL, CMOS, ECL and Sine Wave Clock Oscillators for the instrumentation and communication industries. Excellent frequency stability is achieved with TCXO, Temperature Compensated Crystal Oscillators and OCXO, Ovenized (Proportional Control) Crystal Oscillators. Special requirements are met with VCXO, Voltage Controlled Crystal Oscillators, which can be frequency modulated, with combinations of the basic types such as the TC/VCXO or OC/VCXO. Murata has full-line expertise from economy models to sophisticated, high stability, very low phase noise oscillators that are used as standards for microwave transmitters. Our oscillator production lines are closely monitored by Quality Control through Incoming, In-Process and Final Inspections.

The Crystal Oscillators featured in this catalog are manufactured exclusively at our manufacturing facility in State College, PA and are designed to meet the requirements of most high technology market applications today. However, oscillators can be custom designed to meet your needs. Send us your specifications. We have full-line capability backed by a well staffed engineering department. Murata will assist you in defining your oscillator requirements and provide the support to take your project from the conceptual stage through implementation, including fast prototype turnaround.

OSCILLATOR TECHNICAL PERFORMANCE

If you have a formal specification, send us a copy for quotation. If not, make a copy of our Specification and RFQ Form to help you specify an oscillator to meet your requirements. Select those specifications relevant to your application; cost increases as electrical and mechanical requirements become more stringent. Murata Electronics will produce a cost effective product which will meet all of your oscillator requirements. Since tradeoffs exist in many instances, we are always happy to quote options when cost/performance or cost/size tradeoffs exist. Attach additional sheets to our specification sheet if necessary.



Introduction and Standards

The following material briefly describes our in-house standards and offers some cost/performance tradeoffs.

ENVIRONMENTAL CONDITIONS

See Page 1.

FREQUENCY RANGE

From less than 1Hz to 1GHz, Murata Electronics designs typically center around the "AT" cut crystals, but "SC," "IT," and other cuts are used for certain applications. Fundamental mode crystals from 3MHz and overtones from 5 to 400MHz are utilized in the oscillators. This range is extended through the use of dividers and multipliers. (Oscillators in the microwave range are available through the Murata RF and Microwave Products Group in State College, Pennsylvania.)

FREQUENCY STABILITY

Is generally defined in two ways:

- 1.0 Total Frequency Stability – the maximum frequency excursion from the nominal for all conditions. This is usually expressed as a \pm fraction centered at the nominal frequency.

$$\text{FREQUENCY STABILITY [ppm]} = \frac{\Delta f [\text{Hz}]}{f_c [\text{MHz}]}$$

- 2.0 Specific Stabilities –

- 2.1 Accuracy – the frequency setting tolerance at room temperature at time of shipment. Oscillators may incorporate external adjustments for exact calibration. TCXO's typically exhibit a resolution of $\pm 1\text{pp} \cdot 10^7$. For OCXO's, the typical resolution is to $\pm 1\text{pp} \cdot 10^9$.
- 2.2 Frequency Stability Versus Temperature – a maximum change from the nominal frequency. Oscillators relying on the temperature characteristics of the "AT" crystal can be designed to meet a stability requirement as tight as $\pm 10\text{ppm}$ from -10°C to $+60^\circ\text{C}$. Tighter stabilities to $\pm 0.1\text{ppm}$ require temperature compensation techniques. Ovenized oscillators are used for stabilities to $\pm 5\text{pp} \cdot 10^{10}$.
- 2.3 Frequency Stabilities Versus Supply Voltage and Load Variation – these parameters may be improved by the use of voltage regulation and additional buffer stages. The tighter the stability requirements, the more complex the design.
- 2.4 Stability Versus Time – can be expressed over periods of milliseconds to years. Through use of high quality crystals typical aging rates of $\pm 1\text{ppm}/\text{year}$ are achieved. For OCXO's, it is possible to achieve aging rates as low as $\pm 5\text{pp} \cdot 10^{10}$ per day. Short term stability can be expressed as an Allan Variance over a range of gate times from less than 1msec to 10sec, or in terms of SSB phase noise in the frequency domain.

OUTPUT CHARACTERISTICS

Oscillator output waveforms are either sine or square waves.

- 1.0 Sine Waves – outputs are specified by stating the amplitude of the signal (mW or V_{RMS} and the nominal load impedance (typically) 50 ohms or 1K ohms).

Harmonic and Sub-Harmonic distortion less than -20dBc is standard.


Deviations from the standards can be accommodated. Consult our engineering department.

- 2.0 Square Wave*

| | TTL | CMOS | ECL |
|-----------------|---------------|-------------------------------|---------------------------|
| Logic "0" Level | 0.4V Max. | 1.0V Max. | -1.89V |
| Logic "1" Level | 2.4V Min. | $V_{\text{CC}} - 1.0\text{V}$ | -0.89 |
| Symmetry | 40/60 | 40/60 | 40/60 |
| Load | 10 Gates | 50pF Max. | 50 ohms to -2VDC |
| Freq. Range | 1Hz to 100MHz | 1Hz to 100MHz | 4.0MHz to 700MHz |

*Specify logic type to be driven

RELATIVE FREQUENCY STABILITY OF TYPICAL CRYSTAL OSCILLATOR TYPES

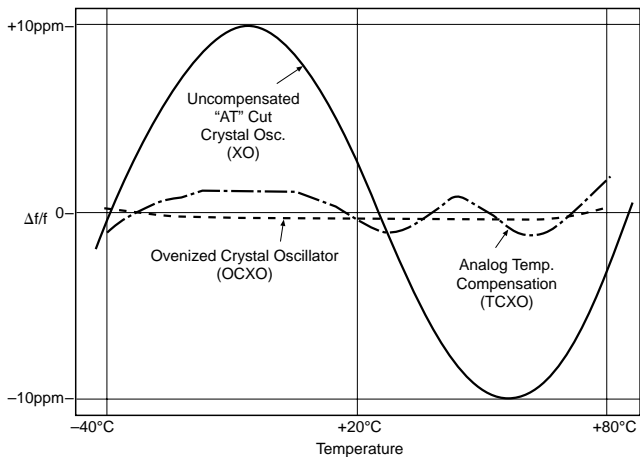

Introduction and Standards

INPUT POWER CHARACTERISTICS

Specification of input voltage and current parameters is vital for the proper design of all oscillators. Voltage, power limits and regulation should be specified for all supplies available. If no regulation is listed, $\pm 5\%$ will be assumed and a voltage regulation circuit incorporated if needed. For ovenized oscillators, the oven input voltage may differ from the oscillator input voltage.

MECHANICAL SPECIFICATIONS


Mechanical Specifications are often unique to your application, but standard sizes and tolerances are $\pm 0.030"$ for outer dimensions and $\pm 0.010"$ to $\pm 0.015"$ for pin spacing. Specify only those dimensions that are critical and let us supply you with a completed outline drawing.

The purpose of these standards is to help you define specifications without over-designing.

PHASE NOISE

Phase noise, which is a measure of the short term frequency fluctuations of the oscillator, is a critical parameter and the limiting factor in the performance of many systems. This is usually specified as the single sideband power density in a 1Hz bandwidth at a specified offset frequency from the carrier.

At Murata Electronics, we use a state-of-the-art phase noise measurement system, which can accurately characterize the phase noise of our oscillators. This system has a noise floor below -170dBc/Hz so that even the best sources may be measured. A typical graph produced by the HP3048A is shown.

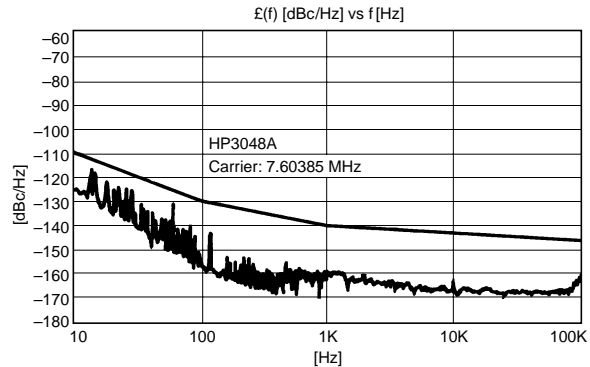

VOLTAGE CONTROL/VCXO

This capability allows the frequency of the oscillator to be changed via an external control voltage. The three most important parameters are:


- 1.0 Frequency Deviation – this is how far the center frequency will change as a function of the control voltage; usually specified in \pm percentage or ppm. As the deviation is made larger, other stabilities such as, temperature and aging will usually degrade.
- 2.0 Linearity – the allowable error from the best straight line. This can be interpreted in a number of ways.

Murata defines linearity per MIL-0-55310, as a \pm percentage of the total deviation, for example:

- a) control voltage of $\pm 3\text{VDC}$
- b) deviation of $\pm .04\%$ (400ppm)
- c) linearity of $\pm 5\%$

For a center frequency of 1.0MHz, the total deviation of $\pm 0.04\%$ equals 800 ppm (800Hz). Line "A" shows the ideal transfer function. Line "B" shows the upper limit, which is 5% of the total deviation ($0.05 \times 800\text{Hz}$) above the nominal curve. Conversely, line "C" shows the lower 5% limit. Line "D" shows a typical oscillator which meets the 5% specification.

- 3.0 Response Slope – the slope of the frequency versus the control voltage (i.e. for a negative slope, the output frequency decreases as the control voltage increases).

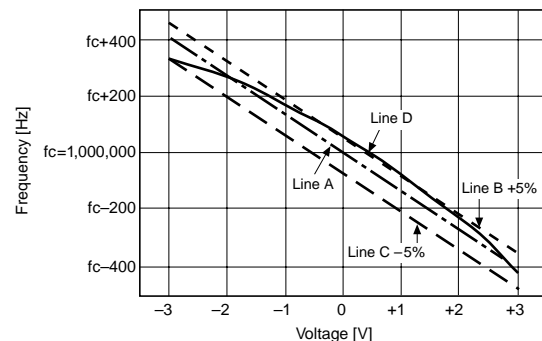

Note:

Frequency can also be controlled with a digital input signal (serial or parallel) instead of an analog voltage. Consult the factory for options.

RFQ Form / Quick Quote

1. Copy on your copier OR 3. Dial (814) 237-1431 Fax (814) 237-1791
2. Send us your specifications 4. Ask for Crystal Oscillator Marketing or Customer Service

NAME _____ TITLE _____ DATE _____
COMPANY _____ DEPARTMENT _____
STREET _____ PHONE _____ FAX/EMAIL _____
CITY _____ STATE _____ ZIP _____

Customer Specification Dwg. No. _____

Frequency and Stability:

Frequency _____

Stability All Conditions _____

Stability @ 25°C _____

ΔF _____ From _____ °C To _____ °C

ΔF _____ Vs ΔB + _____ %

ΔF _____ Vs Time _____

25°C Setting Tolerance _____

Frequency Adjustment _____

Power Supply: Rise Time Fall Time

OSC _____ \pm _____ at _____ mA

OSC _____ \pm _____ at _____ mA

Oven _____ \pm _____ at _____ mA

Output Wave Form:

Sine ☐

Output Level _____

Harmonic Dist. _____ Subs _____

Spurious _____

Load _____

Square: ☐ PECL ☐ LVPECL

☐ TTL ☐ CMOS ☐ ECL ☐ CML

☐ Others _____

Measured From _____ to _____

Duty Cycle _____ at _____ level

Levels: Logic "0" _____ Logic "1" _____

Load: _____

Additional Comments: _____

Environmental:

Storage Temperature _____

Vibration _____

Shock _____

Moisture _____

Seal _____

Others _____

Mechanical:

Size _____

Termination _____

Additions _____

VCXO (Freq. Control) Characteristics:

Freq. Deviation _____

Linearity _____

Control Voltage _____

Input Impedance _____

Modulation Freq. _____

Response Slope _____

Special _____

Finish _____

Mounting _____

Special Notes: _____


Cost vs. Performance Trade Off: _____

Application: _____

Estimated Annual Usage: _____ Target Price: _____

Part Numbering System

PART NUMBERING SYSTEM

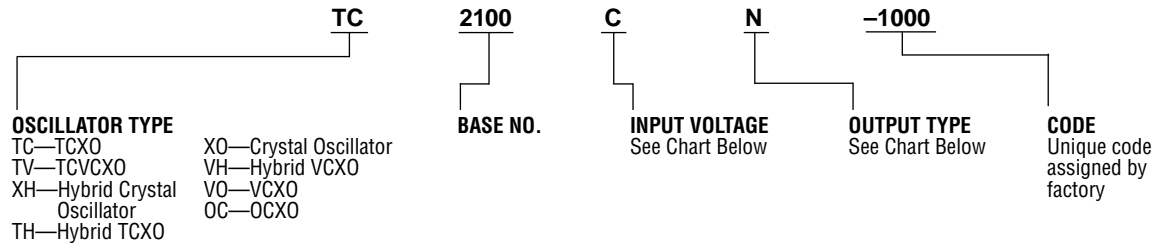

INPUT VOLTAGE (±5% TOLERANCE STANDARD)

| | |
|----------|----------|
| A | +5.0VDC |
| B | +7.5VDC |
| C | +10.0VDC |
| D | +12.0VDC |
| E | +15.0VDC |
| F | +3.3VDC |
| G | -5.0VDC |
| H | -5.2VDC |
| J | -12.0VDC |
| K | -4.5VDC |
| L | +4.0VDC |
| M | (OTHER) |

OUTPUT TYPE

| | |
|----------|--------------------------------------------|
| T | TTL |
| C | CMOS |
| H | HCMOS/TTL Compatible |
| E | ECL "10KH" |
| F | ECL "100K" |
| G | SINE, 0dBm, 50Ω LOAD |
| J | SINE, +3dBm, 50Ω LOAD |
| K | SINE, +7dBm, 50Ω LOAD |
| L | SINE, +10dBm, 50Ω LOAD |
| M | SINE, +13dBm, 50Ω LOAD |
| N | CLIPPED SINE, 1V _{p-p} , 1kΩ LOAD |
| P | 0dBm min., 50Ω LOAD |
| U | PECL |
| V | LVPECL |
| Z | CML |

Temperature Compensating High Stability Crystal Oscillators

SURFACE MOUNT TCXO SERIES – TC2268



FEATURES

- Meets or exceeds Stratum 3
- Sine, Clipped Sine Wave or CMOS output
- SMT packaging

APPLICATIONS


- Telecom clock
- Communications
- Wireless

SPECIFICATIONS

| MODEL | TC2268 |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Standard Frequencies:* | 10.00000MHz 15.0000MHz 16.00000MHz 16.384MHz 20.00000MHz 21.056700MHz 30.00000MHz 32.000MHz |
| Stability: All Conditions: | ± 3.0 ppm worst case for first year product lifetime ± 5.0 ppm worst case for 10 year product lifetime |
| Operating Temp. Range: | 0°C to +85°C |
| Frequency Deviation: | ± 1 ppm min. |
| Phase Noise: | -74dBc @ 10Hz -104dBc @ 100Hz -130dBc @ 1KHz -140dBc @ ≥ 10 KHz |
| Power Consumption for 5VDC $\pm 5\%$: | Ranges from 2mA to 20mA maximum at +25°C |

*Possible frequency range of 5MHz to 50MHz.
Consult factory for other available frequencies.

TC2268

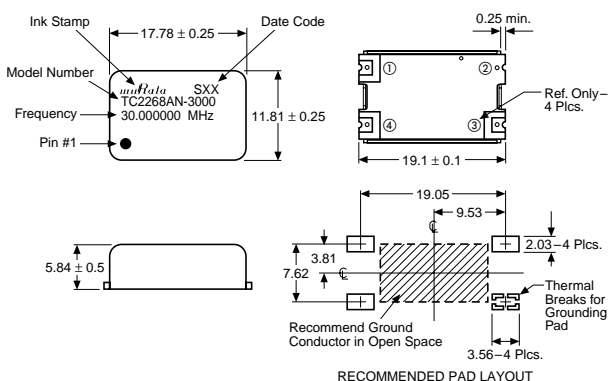


| PIN | FUNCTION |
|-----|----------------|
| 1 | N/C |
| 2 | Ground |
| 3 | Output Signal |
| 4 | Supply Voltage |

RECOMMENDED PAD LAYOUT

Dimensions: mm

PART NUMBERING SYSTEM – TC2268

*Possible frequency range of 5MHz to 50MHz.
Consult factory for other available frequencies.

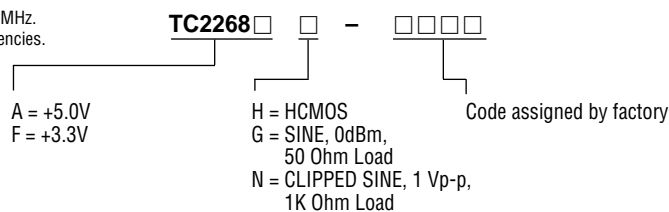

Temperature Compensating High Stability Crystal Oscillators

THRU HOLE TCXO SERIES – TC2110



FEATURES

- Sine Wave and HCMOS compatible outputs
- 4 Pin dip

APPLICATIONS


- Telecom clock
- Instrumentation
- Navigation
- Communications

SPECIFICATIONS

| MODEL | TC2110 |
|----------------------------------|------------------------------------------------------------------------------|
| Standard Frequencies:* | 3.577149MHz 8.192MHz 9.600MHz 10.000MHz 19.600MHz 27.00000MHz |
| Aging: | ±1.0ppm per year worst case |
| Operating Temp. Range: | –20°C to +70°C |
| Frequency vs. Temperature: | ±1ppm maximum |
| Mechanical Frequency Adjustment: | ±5ppm minimum |
| Power Consumption for 5VDC ± 5%: | 25mA maximum at +25°C |


*Consult factory for other available frequencies.

TC2110

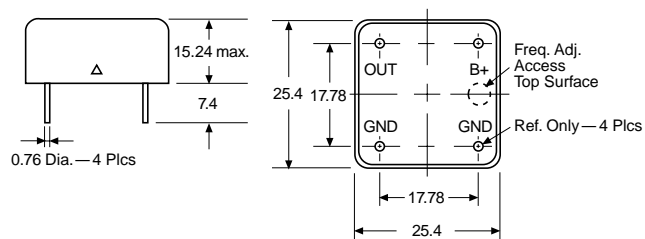

Dimensions: mm

PART NUMBERING SYSTEM – TC2110

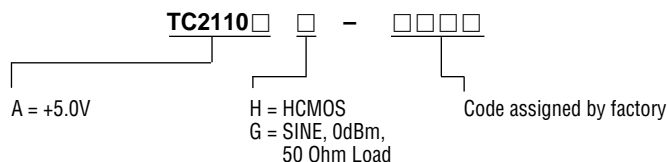

Temperature Compensating High Stability Crystal Oscillators

THRU HOLE TCXO SERIES – TC2178



FEATURES

- Sine, clipped SINE wave, HCMOS compatible output
- 3 pin dip

APPLICATIONS


- Telecom clock
- Communications
- Wireless
- Instrumentation

SPECIFICATIONS

| MODEL | TC2178 |
|----------------------------------------|--------------------------------------------------|
| Standard Frequencies:* | 6.144MHz |
| | 9.600MHz |
| | 10.000000MHz |
| | 12.8000MHz |
| | 13.5168MHz |
| | 15.360000MHz |
| | 16.000MHz |
| | 16.384MHz |
| | 19.5000MHz |
| | 24.00000MHz |
| | 25.00000MHz |
| | 32.000MHz |
| | 39.300MHz |
| | 44.950MHz |
| | 44.952MHz |
| | 128.000000MHz |
| Stability: All Conditions: | ±5ppm worst case per 10 year product lifetime |
| Widest Operating Temp. Range: | 0°C to +85°C |
| Electrical Frequency Deviation: | ±6ppm minimum |
| Mechanical Frequency Adjustment: | ±5ppm minimum |
| Control Voltage Range: | –4.5VDC to +4.5VDC |
| Phase Noise: | –60dBc @ 1Hz |
| | –90dBc @ 10Hz |
| | –110dBc @ 100Hz |
| | –130dBc @ ≥1KHz |
| Power Consumption for +5VDC Supply: | 2mA to 50mA typical at +25°C |

*Possible frequency range of 5MHz to 155.52MHz.
Consult factory for other available frequencies.


TC2178

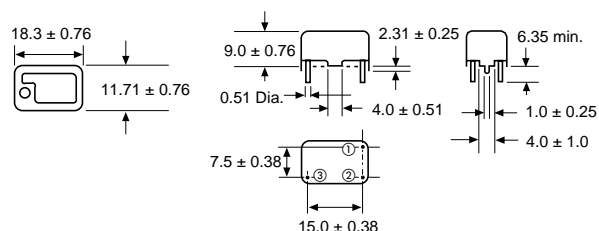

| PIN | FUNCTION |
|-----|-----------------|
| 1 | Common and Case |
| 2 | Output |
| 3 | +Vcc |

Dimensions: mm

PART NUMBERING SYSTEM – TC2178

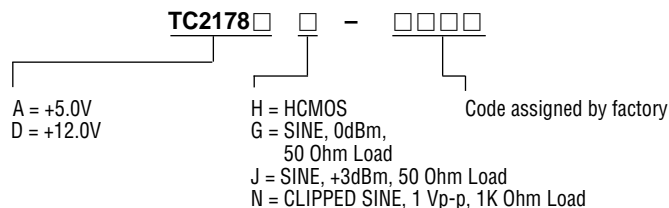

Temperature Compensating High Stability Crystal Oscillators

THRU HOLE TCXO SERIES – TC2378



FEATURES

- Meets or exceeds Stratum 3 requirements
- LVPECL (100EL series compatible)

APPLICATIONS


- Telecom clock

SPECIFICATIONS


| MODEL | TC2378 |
|------------------------------------|-------------------------------------------------------------------|
| Standard Frequencies:* | 155.520000MHz 622.080MHz |
| Stability All Conditions: | ±4.6ppm worst case per 10 years of product lifetime |
| Operating Temp. Range: | 0°C to +70°C |
| Frequency Accuracy: | ±0.5ppm max. at 25°C |
| Jitter: | 30psec p-p max. |
| Power Consumption +5VDC Supply: | 20mA maximum |
| +3.3VDC Supply: | 70mA maximum |
| Frequency Vs ±5% Supply Variation: | ±0.1ppm |
| 24 Hr. Holdover Stability: | 0.37ppm maximum (includes up to 20°C temperature drift and aging) |

*Consult factory for other available frequencies.

TC2378

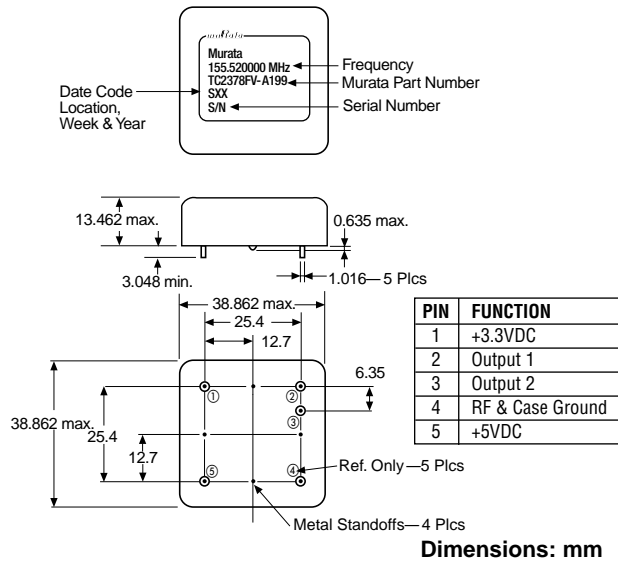

PART NUMBERING SYSTEM – TC2378



Temperature Compensating High Stability Crystal Oscillators

TC/VCXO SERIES – TV2178



FEATURES

- Meets or exceeds Stratum 4
- Sine, Clipped SINE and HCMOS compatible outputs
- 4 pin dip

APPLICATIONS


- Telecom clock
- Wireless communications
- Instrumentation

SPECIFICATIONS

| MODEL | TV2178 |
|-------------------------------------|---------------------------------------------------|
| Standard Frequencies:* | 10.000000MHz |
| | 12.000000MHz |
| | 12.800000MHz |
| | 14.400000MHz |
| | 15.000MHz |
| | 15.3600MHz |
| | 16.384000MHz |
| | 19.6608MHz |
| | 20.000000MHz |
| | 35.000MHz |
| | 100.000000MHz |
| Stability All Conditions: | ±5ppm worst case per 10 years of product lifetime |
| Operating Temp. Range: | –40°C to +85°C |
| Frequency Deviation: | ±10ppm min. to ±40ppm maximum |
| Mechanical Frequency Adjustment: | ±5ppm minimum |
| Control Voltage Range: | –4.5VDC to +4.5VDC |
| Phase Noise: | –60dBc @ 1Hz |
| | –90dBc @ 10Hz |
| | –110dBc @ 100Hz |
| | –130dBc @ ≥1KHz |
| Power Consumption for +5VDC Supply: | 2mA to 25mA typical at +25°C |

*Possible frequency range of 5MHz to 155.52MHz.
Consult factory for other available frequencies.


TV2178

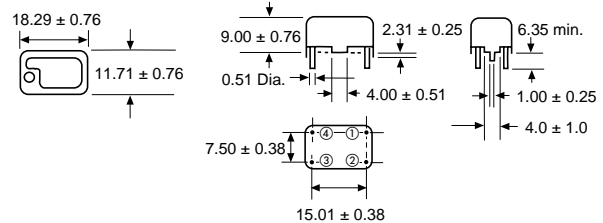

| PIN | FUNCTION |
|-----|-----------------|
| 1 | Common and Case |
| 2 | Output |
| 3 | +Vcc |
| 4 | +Vc Input |

Dimensions: mm

PART NUMBERING SYSTEM – TV2178

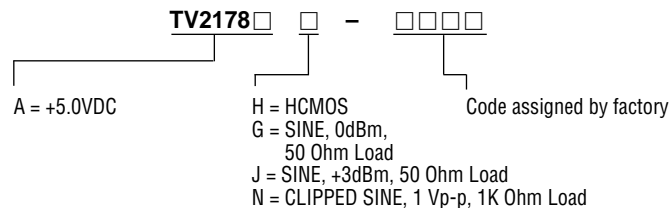

Temperature Compensating High Stability Crystal Oscillators

TC/VCXO SERIES – TV2363



FEATURES

- Meets or exceeds SONET minimum clock requirements
- 100K ECL compatible output
- 24 Pin DIP

APPLICATIONS


- Telecom clock
- OC-3

SPECIFICATIONS

| MODEL | TV2363 |
|--------------------------------------|------------------------------------------------|
| Standard Frequencies:* | 155.520MHz |
| Stability All Conditions: | ±15ppm worst case for 20 year product lifetime |
| Operating Temp. Range: | -40°C to +85°C |
| Frequency Deviation: | ±40ppm min. to ±60ppm maximum |
| Control Voltage Range: | -8VDC to +8VDC |
| VCXO Modulation Bandwidth: | DC to 1.4KHz |
| Jitter: | 64psec p-p maximum |
| Aging: | ±15ppm per 20 years |
| Power Consumption -4.5VDC Supply: | 50mA maximum at +25°C |
| +12VDC Supply: | 20mA maximum at +25°C |


*Consult factory for other available frequencies.

TV2363

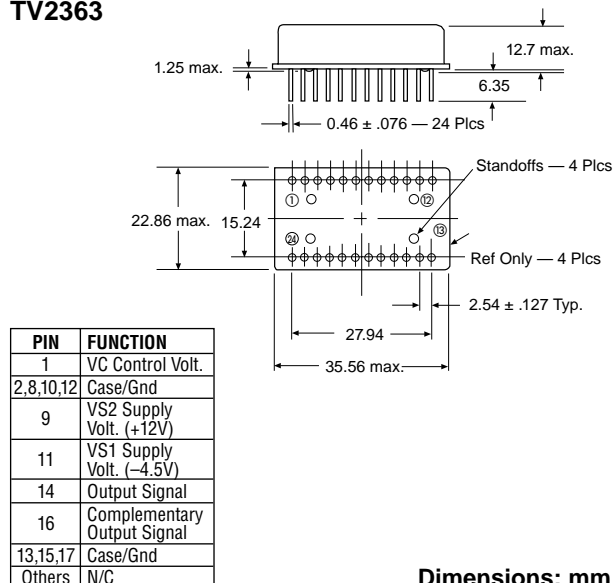


Dimensions: mm

100K ECL COMPLEMENTARY OUTPUT CHARACTERISTICS

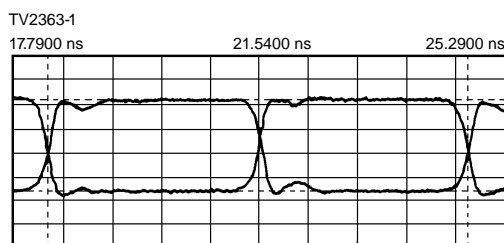

Ch. 1 = 200.0 mVolts/div
Delta V = 768.75 mVolts
Timebase = 750 ps/div

PART NUMBERING SYSTEM – TV2363



Voltage Controlled Oscillators

SURFACE MOUNT VCXO FOR SONET – VH2211




FEATURES

- Meets or exceeds SONET minimum clock requirements
- CML, PECL or LVPECL output
- SMT packaging
- Available tape and reel
- Reflow solderable
- Very low jitter
- Low aging
- Tightly controlled Kv for PLL

APPLICATIONS

- OC-12, OC-48, OC-192 and OC-768
- Forward error correction frequencies available

VH2211

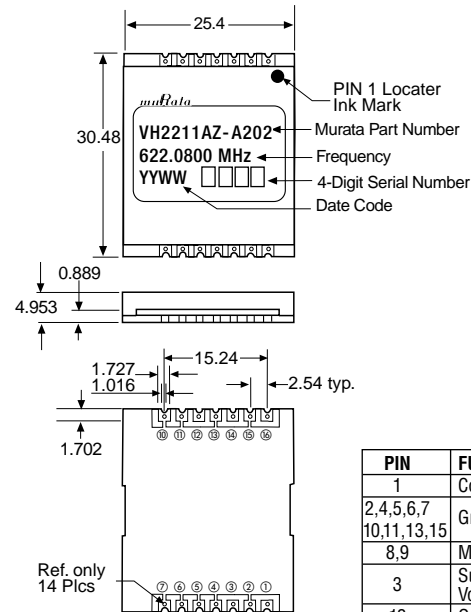

| PIN | FUNCTION |
|-----------------------|------------------------|
| 1 | Control Voltage |
| 2,4,5,6,7,10,11,13,15 | Ground |
| 8,9 | Missing |
| 3 | Supply Voltage (+5.0V) |
| 12 | Output Signal Q |
| 14 | Output Signal /Q |
| 16 | Disable |


Dimensions: mm

SPECIFICATIONS

| MODEL | VH2211 |
|---------------------------------------|-------------------------------------------------------------------------|
| Standard Frequencies:* | 622.0800MHz 666.514286MHz (15/14 of 622.0800MHz) |
| Stability All Conditions: | ±20ppm worst case for 20 year lifetime |
| Operating Temp. Range: | 0°C to +85°C |
| Control Voltage Range: | 0.5 to 4.5VDC |
| Modulation Bandwidth: | 100KHz minimum |
| Modulation Gain: | 19.4ppm/V ≤Kv ≤29.0ppm/V |
| Jitter: | .001 UI max. |
| Phase Noise: | -60dBc @ 100Hz -90dBc @ 1KHz -110dBc @ 10KHz -125dBc @ ≥100KHz |
| Electrical Tuning: | ±40ppm to ±60ppm |
| Power Consumption for +5.0VDC Supply: | 50mA maximum |
| Sub-Harmonics | -45dBc maximum |

*Consult factory for other available frequencies.

PART NUMBERING SYSTEM – VH2211

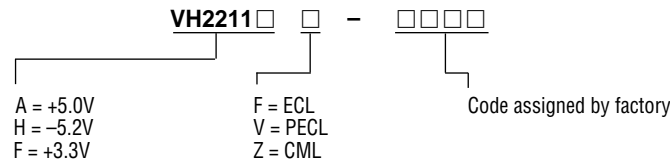

Voltage Controlled Oscillators

SURFACE MOUNT VCXO FOR SONET – VO2246

2



FEATURES

- Inverted Mesa, AT cut fundamental mode crystal technology
- ECL, PECL or LVPECL compatible output
- Meets or exceeds SONET minimum clock requirements
- SMT packaging
- Available tape and reel
- Reflow solderable
- Very low jitter
- Low aging
- No subharmonics

APPLICATIONS


- Telecom clock
- Forward error correction frequencies

SPECIFICATIONS



| MODEL | VO2246 |
|---------------------------|--------------------------------------------------------------------------|
| Standard Frequencies:* | 155.520000MHz 166.628500MHz |
| Stability All Conditions: | ±20ppm worst case over 20 year product lifetime |
| Operating Temp. Range: | 0°C to 70°C |
| Jitter: | .001 UI RMS max. |
| Phase Noise: | -80dBc @ 100Hz -110dBc @ 1KHz -135dBc @ 10KHz -140dBc @ ≥100KHz |
| Power Consumption: | 65mA typical at +25°C |

*Consult factory for other available frequencies.

VO2246

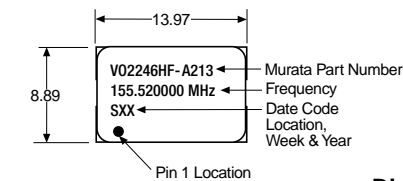


Dimensions: mm

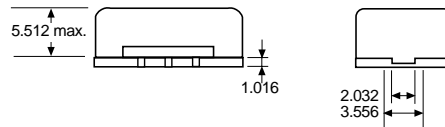

| PIN | FUNCTION |
|-----|----------------|
| 1 | N/C |
| 2 | N/C |
| 3 | Supply Voltage |
| 4 | Q Output |
| 5 | /Q Output |
| 6 | Ground |

PART NUMBERING SYSTEM – VO2246

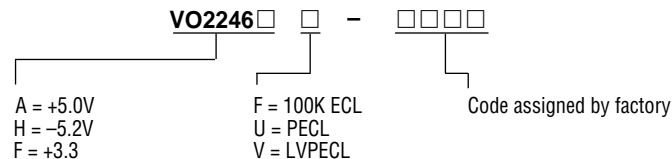

Voltage Controlled Oscillators

SURFACE MOUNT VCXO FOR SONET – VO2268



FEATURES

- SINE, 0dBm, 50Ohm load
- SMT packaging
- Available tape and reel
- Reflow solderable
- Very low jitter
- Low aging

APPLICATIONS

- Telecom clock
- Wireless communication
- Instrumentation



2

SPECIFICATIONS

| MODEL | VO2268 |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------|
| Standard Frequencies:* | 32.000000MHz 39.3216MHz |
| Stability All Conditions: | ±40ppm worst case |
| Operating Temp. Range: | –40°C to 85°C |
| Frequency Deviation: | ±40ppm min. over full tuning voltage range |
| Control Voltage Range: | +0.5VDC ≤ VC ≤ +4.5VDC |
| Jitter: | 50 psec p-p max. |
| Phase Noise: | –80dBc @ 10Hz –110dBc @ 100Hz –130dBc @ 1KHz –140dBc @ 10KHz –140dBc @ 100KHz –140dBc @ >100KHz |
| Power Consumption for +5V Supply: | 20mA typical at +25°C |

*Consult factory for other available frequencies.


VO2268

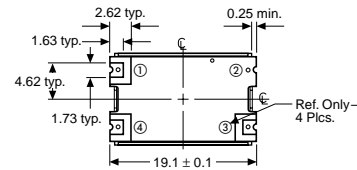

Dimensions: mm

| PIN | FUNCTION |
|-----|----------------|
| 1 | EFC |
| 2 | Ground |
| 3 | Output Signal |
| 4 | Supply Voltage |

PART NUMBERING SYSTEM – VO2268

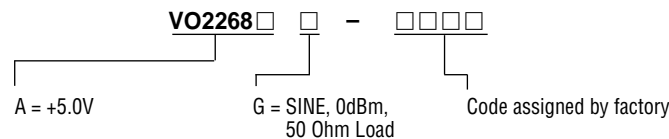

Voltage Controlled Oscillators

SURFACE MOUNT VCXO FOR SONET – VO2286

2



FEATURES

- Meets or exceeds SONET Stratum 4 requirements
- Inverted Mesa, AT cut fundamental mode crystal technology
- ECL, PECL, LVPECL and CML compatible output
- SMT packaging
- Available tape and reel
- Reflow solderable
- Very low jitter
- Low aging
- FEC frequencies available
- No subharmonics

APPLICATIONS



- OC-3
- Clock recovery PLL

SPECIFICATIONS

| MODEL | VO2286 |
|---------------------------|--------------------------------------------------------|
| Standard Frequencies:* | 155.520000MHz 166.628571MHz |
| Stability All Conditions: | ±35ppm worst case for 20 year product lifetime |
| Operating Temp. Range: | 0°C to 85°C |
| Control Voltage Range: | 0.0 to 5.0VDC |
| Modulation Bandwidth: | DC to 50KHz |
| Modulation Sensitivity: | 45ppm/V $\geq K_v \geq 28$ ppm/V (others upon request) |
| Jitter: | .001 UI max. |
| Electrical Tuning: | ±50ppm \leq Freq. Deviation \leq ±125ppm |
| Power Consumption: | 10mA to 65mA |

*Consult factory for other available frequencies.


VO2286

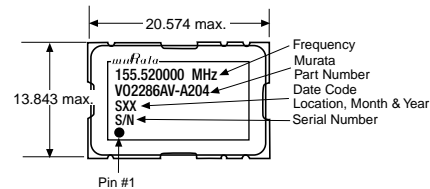

| PIN | FUNCTION |
|-----|----------------------|
| 1 | Vc Control Voltage |
| 6 | Disable |
| 7 | Ground |
| 9 | Output Signal |
| 10 | Complementary Output |
| 14 | Vs Supply Voltage |

Dimensions: mm

PART NUMBERING SYSTEM – VO2286

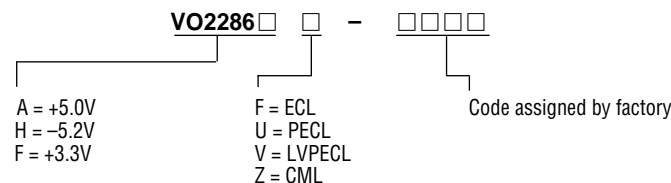

Voltage Controlled Oscillators

THRU HOLE VCXO FOR SONET – VH1011



FEATURES

- Meets or exceeds SONET minimum clock requirements
- 100K ECL, PECL compatible
- 16 pin gullwing packaging
- Very low jitter
- Low aging
- Tightly controlled Kv for PLL

APPLICATIONS

- OC-12, OC-48, OC-192 and OC-768
- Forward error correction frequencies available


2

SPECIFICATIONS

| MODEL | VH1011 |
|-------------------------------------|-------------------------------------------------------------------------|
| Standard Frequencies:* | 622.080MHz 666.514286MHz (622.080MHz 15/14) 669.3265MHz |
| Stability All Conditions: | ±20ppm over 10 year product lifetime |
| Operating Temp. Range: | 0°C to 85°C |
| Frequency Deviation: | ±40ppm to ±60ppm |
| Control Voltage Range: | -4.5VDC ≤ VC ≤ -0.5VDC |
| Modulation Bandwidth: | 100KHz minimum |
| Modulation Sensitivity: | 19.4ppm/V ≤ Kv ≤ 29.0ppm/V |
| Phase Noise: | -60dBc @ 100Hz -90dBc @ 1KHz -110dBc @ 10KHz -125dBc @ ≥100KHz |
| Power Consumption for -5VDC Supply: | 65mA maximum |
| Sub-harmonics: | -35dBc maximum |

*Consult factory for other available frequencies.


VH1011

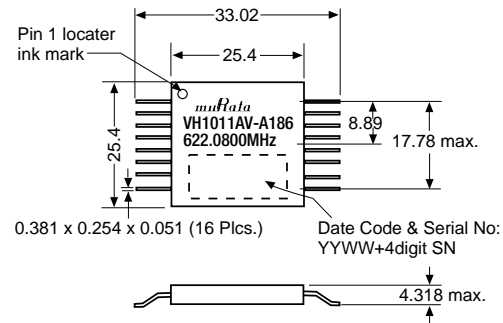

| PIN | FUNCTION |
|--------|----------------------|
| 1 | Control Voltage |
| 8, 9 | Supply Voltage +5.0V |
| 14 | Output Signal |
| 12 | Complementary Output |
| 2-7,10 | Ground |

Dimensions: mm

PART NUMBERING SYSTEM – VH1011

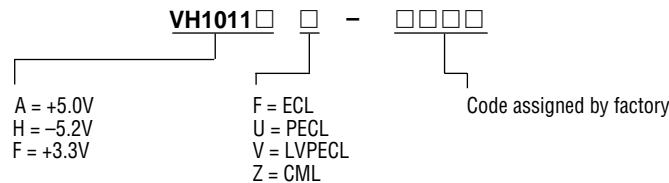

Voltage Controlled Oscillators

THRU HOLE VCXO FOR SONET – VO2386

2



FEATURES

- Meets or exceeds Stratum 4 requirements
- Inverted Mesa, AT cut fundamental mode crystal technology
- ECL, PECL, LVPECL and CML compatible output
- DIP packaging
- Very low jitter
- Low aging
- FEC frequencies available
- No subharmonics

APPLICATIONS


- Telecom clock
- Forward correction code applications

SPECIFICATIONS

| MODEL | VO2386 |
|-------------------------------------|-----------------------------------------------------------------------|
| Standard Frequencies:* | 155.520000MHz |
| Stability All Conditions: | ±35ppm worst case over 20 year product lifetime |
| Operating Temp. Range: | 0°C to 85°C |
| Control Voltage Range: | 0.0VDC to 5.25VDC |
| Modulation Bandwidth: | DC to 50 KHz |
| Modulation Sensitivity: | 28ppm/V ≤ Kv ≤ 45ppm/V (other deviation upon request) |
| Electrical Tuning: | ±50ppm minimum to ±125ppm maximum (others are available upon request) |
| Jitter: | .001 UI RMS max. |
| Power Consumption for +5VDC Supply: | 10mA to 65mA typical at +25°C |

*Consult factory for other available frequencies.


VO2386



| PIN | FUNCTION |
|-----|--------------------------------------------|
| 1 | V _c , Control Voltage |
| 7 | Ground, Case/Ground |
| 8 | Q ₁ Output Signal |
| 9 | Q ₂ Complementary Output Signal |
| 14 | V _{cc} |

Dimensions: mm

PART NUMBERING SYSTEM – VO2386

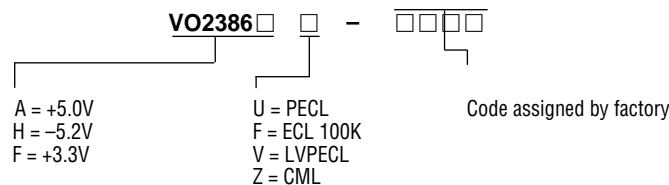

Ovenized Crystal Oscillators

SURFACE MOUNT – OC3125



FEATURES

- Meets or exceeds Stratum 3 requirements
- LVPECL output
- Hermetic surface mount packaging
- +3.3V supply

APPLICATIONS


- Telecom clock

SPECIFICATIONS


| MODEL | OC3125 |
|-----------------------------------|--------------------------------------------------------------------------|
| Standard Frequencies:* | 77.760000MHz |
| Stability All Conditions: | ±4.6ppm maximum for 10 year product lifetime |
| Operating Temp. Range: | 0°C to 70°C |
| Frequency Tolerance: | ±0.5ppm maximum at 25°C |
| Supply Voltage Range: | +3.3VDC ± 5% |
| Jitter: | 0.001 UI |
| Warm-up: | ±0.20ppm of 2-hour frequency after 3 minutes maximum |
| Allan Variance: | 1x10 ⁻⁹ for $\tau = 1$ sec |
| Power Consumption +3.3VDC Supply: | 1.15A max. for 3 minutes max. for warmup at +25°C 300mA typical at +25°C |

*Consult factory for other available frequencies.

OC3125

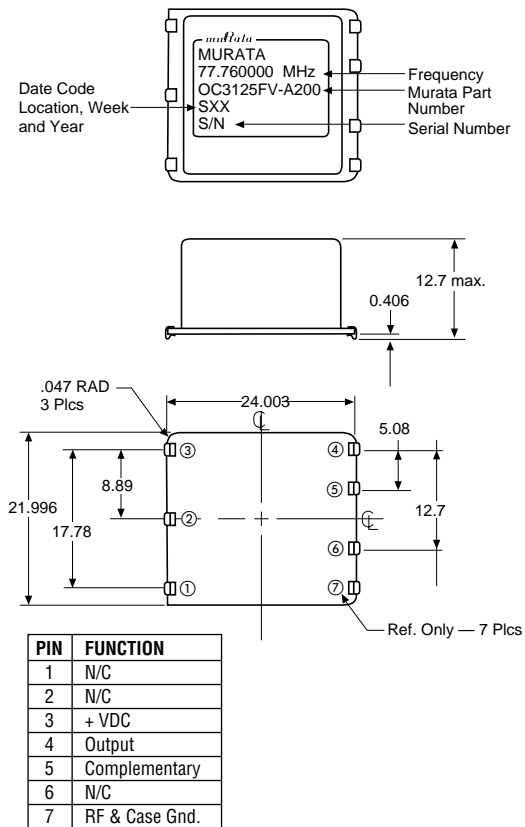

PART NUMBERING SYSTEM – OC3125

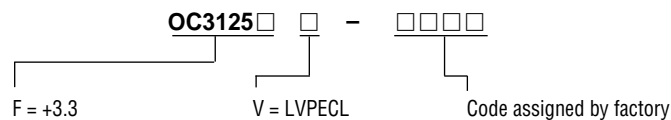

Ovenized Crystal Oscillators

THRU HOLE OCXO FOR SONET – OC2545



FEATURES

- Meets or exceeds Stratum 3 requirements
- HCMOS/TTL or Sine Wave output
- 8 pin DIP packaging
- Low phase noise
- AT cut crystal

APPLICATIONS

- Telecom clock
- Instrumentation
- Navigation
- Communications
- VSAT


3

SPECIFICATIONS


| MODEL | OC2545 |
|---------------------------------------|------------------------------------------------------------------------|
| Standard Frequencies:* | 10.000MHz 12.000MHz |
| Operating Temp. Range: | 0°C to 60°C |
| Frequency Deviation: | ±4.0ppm minimum |
| Frequency vs Temperature: | ±0.2ppm maximum |
| Control Voltage Range: | 0VDC to 6VDC |
| Modulation Bandwidth: | DC to 150Hz minimum |
| Warm-up: | ±0.1ppm after 10 minutes at 25°C |
| Phase Noise: | -110dBc @ 10Hz -120dBc @ 100Hz -135dBc @ 1KHz -140dBc @ 10KHz |
| Harmonic Distortion Sine Wave output: | -25dBc maximum |
| Electrical Tuning: | ±4ppm minimum for 0 to 6 volts |
| Power Consumption | 250mA maximum at startup 90mA typical at +25°C |

*Consult factory for other available frequencies.


OC2545-DT

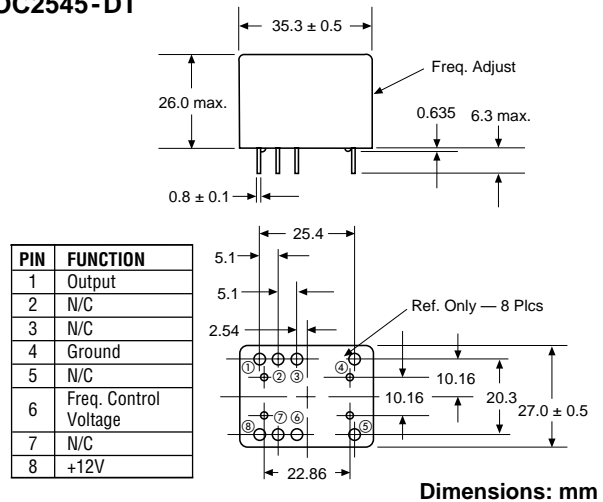

OC2545-DT

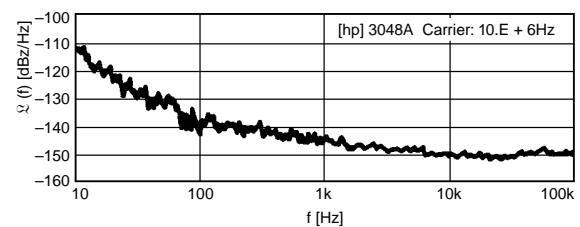

PART NUMBERING SYSTEM – OC2545

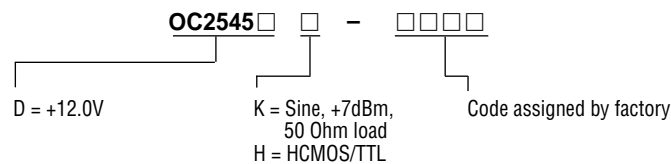

Ovenized Crystal Oscillators

THRU HOLE – OCXO FOR SONET – OC2566



FEATURES

- Meets or exceeds Stratum 3 requirements
- Sine Wave, HCMOS compatible output
- DIP packaging
- SC cut crystal

APPLICATIONS

- Telecom clock
- Instrumentation
- Navigation
- Communications
- VSAT


3

SPECIFICATIONS

| MODEL | OC2566 |
|---------------------------|---------------------------------|
| Standard Frequencies:* | 3.000MHz |
| Stability All Conditions: | ±0.20ppm maximum per year |
| Operating Temp. Range: | –30°C to 70°C |
| Frequency vs Temperature: | ±25ppb maximum |
| Warm-up: | ±0.1ppm after 5 minutes at 25°C |
| Frequency Adjustment: | ±1.0ppm minimum from nominal |
| Power Consumption | |
| +15V Supply: | 50mA typical |
| +27V Supply: | 400mA maximum |
| Output Level: | +13dBm to +18dBm (@50 Ohm load) |
| Harmonic Distortion: | –20dBc maximum |

*Consult factory for other available frequencies.


OC2566

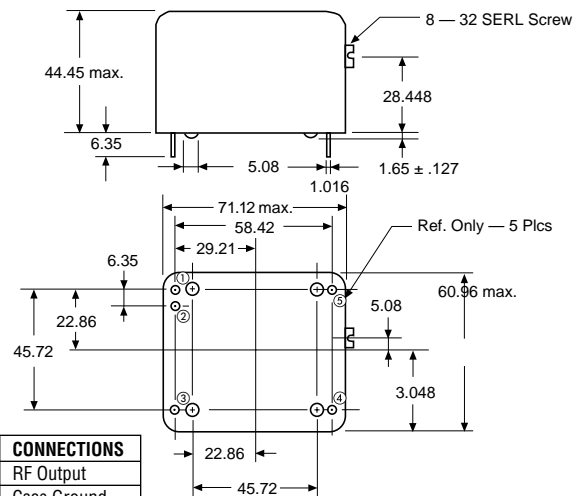

| PIN | CONNECTIONS |
|-----|-----------------|
| 1 | RF Output |
| 2 | Case Ground |
| 3 | +15V OSC Input |
| 4 | Ground |
| 5 | +27V Oven Input |

Dimensions: mm

PART NUMBERING SYSTEM – OC2566

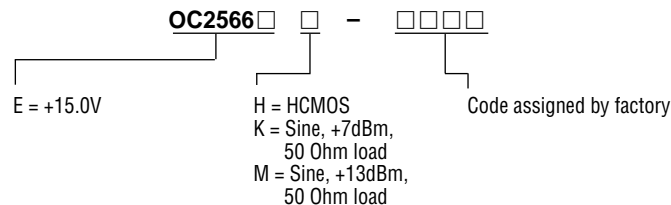

Ovenized Crystal Oscillators

THRU HOLE OCXO FOR SONET – OC2644



FEATURES

- Fast warm-up SC cut crystal technology
- Meets or exceeds SONET Stratum 3 requirements
- HCMOS or SINE outputs
- Industry standard EURO packaging

APPLICATIONS

- Telecom clock
- Instrumentation
- VSAT
- Navigation
- Communications


3

SPECIFICATIONS


| MODEL | OC2644 |
|------------------------|------------------------------------------------------------------------------------|
| Standard Frequencies:* | 10.000MHz 13.000000MHz 15.000MHz 16.384MHz 19.440MHz |
| Operating Temp. Range: | 0°C to +70°C |
| Frequency Stability: | ±10ppb |
| Control Voltage Range: | 0VDC to +4.0VDC |
| Warm-up: | ±0.1ppm of 24-hour frequency after 30 minutes at 25°C, worst case |
| Allan Variance: | 1x10 ⁻¹⁰ maximum for τ = 1 sec |
| Phase Noise: | -115dBc/Hz @ 10Hz -135dBc/Hz @ 100Hz -145dBc/Hz @ 1KHz -150dBc/Hz @ 10KHz |
| Electrical Tuning: | ±1.0ppm to ±2.0ppm |
| Aging: | ±1.0ppb per day maximum at shipment date |
| Power Consumption: | 750mA maximum at start up, 200mA typical at +25°C |

*Consult factory for other available frequencies.

OC2644

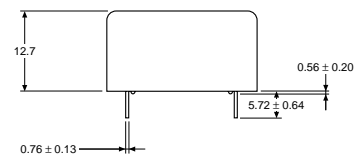


| PIN | FUNCTION |
|-----|-----------------|
| 1 | Control Voltage |
| 2 | Ref. Voltage |
| 3 | Supply Voltage |
| 4 | RF Output |
| 5 | Ground |

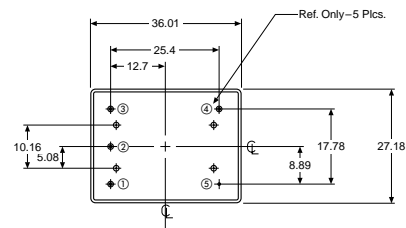


Dimensions: mm

TYPICAL PHASE NOISE (OC2644)

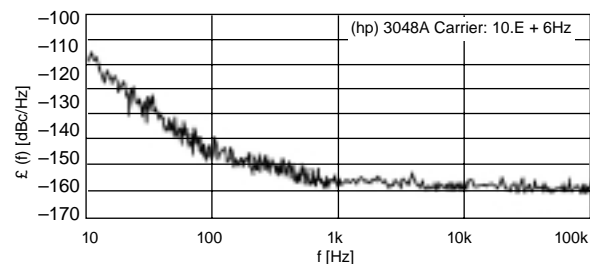

PART NUMBERING SYSTEM – OC2644

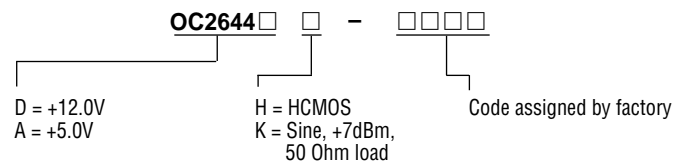

Ovenized Crystal Oscillators

THRU HOLE OCXO FOR SONET – OC2710



FEATURES

- Meets Stratum 3 requirements
- HCMOS compatible output
- 14 pin DIP packaging

APPLICATIONS

- Telecom clock
- A variety of power supply options
- Instrumentation
- Wireless communication


3

SPECIFICATIONS

| MODEL | OC2710 |
|-------------------------------------|---------------------------------------------------------------|
| Standard Frequencies:* | 16.384MHz 19.440MHz 20.480MHz |
| Stability All Conditions: | ±4.6ppm maximum for 10 year product lifetime |
| Operating Temp. Range: | 0°C to +60°C |
| Frequency Deviation: | ±0.5ppm maximum at 25°C |
| Control Voltage Range: | +0.5VDC to +4.5VDC |
| Warm-up: | ±0.2ppm of 24-hour frequency after 30 minutes at 25°C |
| Electrical Tuning: | ±10ppm to ±16.5ppm |
| Power Consumption For +5VDC Supply: | 800 mA maximum at start-up, 200 mA typical stable at +25°C |


*Consult factory for other available frequencies.
Possible frequency ranges of 5MHz to 45MHz.

OC2710

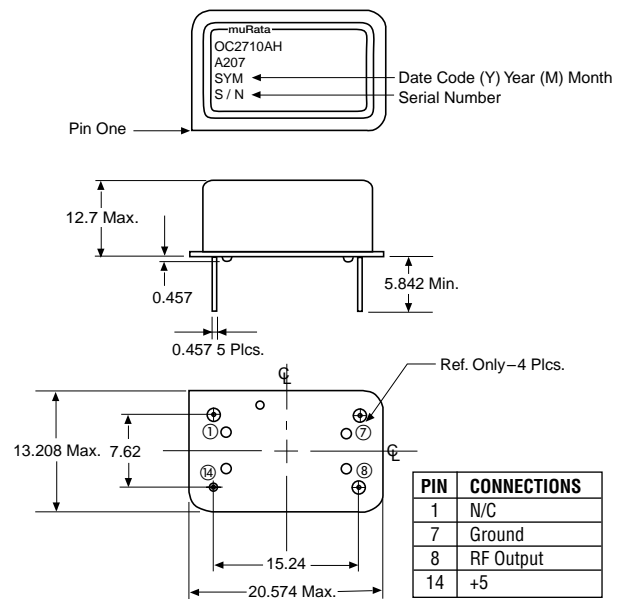

Dimensions: mm

PART NUMBERING SYSTEM – OC2710

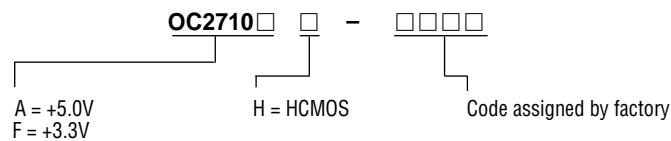

Note: Consult factory for other supply options available.

Ovenized Crystal Oscillators

THRU HOLE OCXO FOR SONET – OC3545



FEATURES

- Meets or exceeds Stratum 3 requirements
- Sine Wave or HCMOS/TTL compatible output
- Low phase noise

APPLICATIONS

- Telecom clock
- Instrumentation
- Navigation
- Communications


3

SPECIFICATIONS

| MODEL | OC3545 |
|---------------------------------|-----------------------------------------------------------------------|
| Standard Frequencies:* | 9.830400MHz 12.800000MHz 14.1364MHz 15.00MHz 17.000000MHz |
| Stability All Conditions: | ±4.6ppm for 20 years product lifetime max. |
| Operating Temp. Range: | 0°C to +70°C |
| Frequency Tolerance: | ±0.5ppm at 25°C |
| Warm-up: | ±0.10ppm of 24-hour frequency after five minutes |
| Phase Noise: | -95dBc @ 10Hz -125dBc @ 100Hz -140dBc @ ≥1KHz |
| Power Consumption +3.3V Supply: | 1.15 A maximum at turn on 330mA typical stable at +25°C |
| +5.0V Supply: | 750mA maximum at turn on 200mA typical stable at +25°C |

*Consult factory for other available frequencies.


OC3545

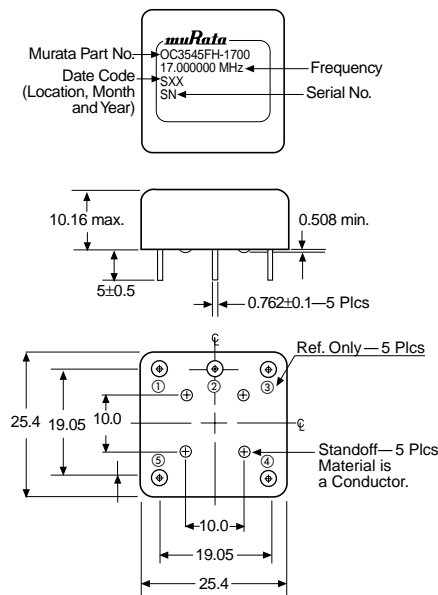

| PIN | CONNECTIONS |
|-----|-------------|
| 1 | RF Output |
| 2 | GND/Case |
| 3 | N/C |
| 4 | Oven Status |
| 5 | VCC |

Dimensions: mm

PART NUMBERING SYSTEM – OC3545

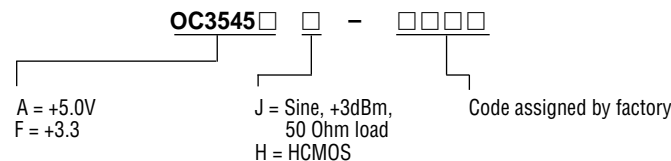

Crystal Oscillators

SURFACE MOUNT CRYSTAL OSCILLATOR FOR SONET – XO2246



FEATURES

- Inverted Mesa, AT cut fundamental mode crystal technology
- ECL, PECL and LVPECL compatible output
- SMT packaging
- Available tape and reel
- Reflow solderable
- Very low jitter
- Low aging
- No subharmonics

APPLICATIONS


- Telecom clock
- Forward error correction

SPECIFICATIONS

| MODEL | XO2246 |
|------------------------|--------------------------------------------------------------------------|
| Standard Frequencies:* | 155.520000MHz 166.628500MHz |
| Stability: | ±20ppm worst case over 20 year product lifetime |
| Operating Temp. Range: | 0°C to 70°C |
| Jitter: | .001 UI RMS max. |
| Phase Noise: | -80dBc @ 100Hz -110dBc @ 1KHz -135dBc @ 10KHz -140dBc @ ≥100KHz |
| Power Consumption: | 65mA typical at +25°C |


*Consult factory for other available frequencies.

XO2246

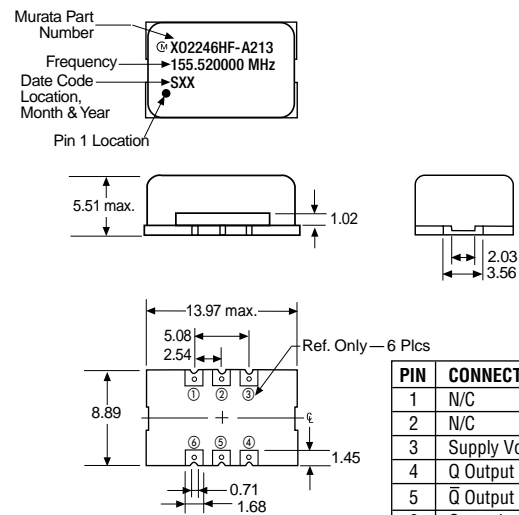

Dimensions: mm

PART NUMBERING SYSTEM – XO2246

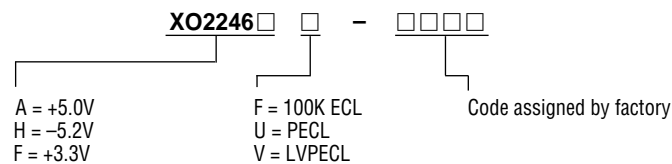

Crystal Oscillators

SURFACE MOUNT CRYSTAL OSCILLATOR FOR SONET – XO2266



FEATURES

- Inverted Mesa, AT cut fundamental mode crystal technology
- PECL compatible output
- SMT packaging
- Available tape and reel
- Reflow solderable
- Very low jitter
- Low aging
- No subharmonics

APPLICATIONS




- Telecom clock
- Forward error correction

SPECIFICATIONS

| MODEL | DC2300 |
|------------------------|-------------------------------------------------|
| Standard Frequencies:* | 155.520000MHz |
| Stability: | ±15ppm worst case over 10 year product lifetime |
| Operating Temp. Range: | 0°C to 70°C |
| Power Consumption: | 85mA maximum |

*Consult factory for other available frequencies.


XO2266

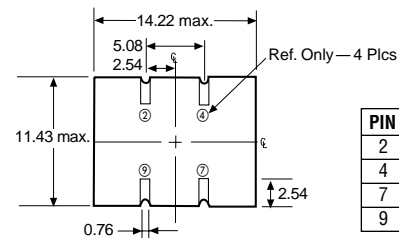

| PIN | CONNECTIONS |
|-----|----------------|
| 2 | Enable/Disable |
| 4 | Ground |
| 7 | Output |
| 9 | Vcc |

Dimensions: mm

PART NUMBERING SYSTEM – XO2266



Crystal Oscillators

SURFACE MOUNT CRYSTAL OSCILLATOR FOR SONET – X02286



FEATURES

- Inverted Mesa, AT cut fundamental mode crystal technology
- LVPECL compatible output
- SMT packaging
- Available tape and reel
- Reflow solderable
- Very low jitter
- Low aging
- No subharmonics



APPLICATIONS

- Telecom clock
- Forward error correction

SPECIFICATIONS

| MODEL | X02286 |
|------------------------|-------------------------------------------------------------------------|
| Standard Frequencies:* | 155.520000MHz 167.331646MHz |
| Stability: | ±20ppm worst case over 10 year product lifetime |
| Operating Temp. Range: | 0°C to 85°C |
| Jitter: | .001 UI RMS max. |
| Phase Noise: | -60dBc @ 100Hz -90dBc @ 1KHz -110dBc @ 10KHz -125dBc @ ≥100KHz |
| Power Consumption: | 20mA max. |


*Consult factory for other available frequencies.

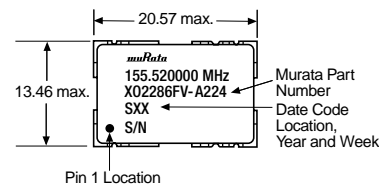

| PIN | CONNECTIONS |
|-----|----------------------|
| 1 | No Connect |
| 6 | No Connect |
| 7 | Ground |
| 8 | Output Signal |
| 9 | Complementary Output |
| 14 | Vs Supply Voltage |

Dimensions: mm

PART NUMBERING SYSTEM – X02286



Digitally Compensated Crystal Oscillators

DC2300 SERIES FOR SONET



FEATURES

- Digitally compensated to improve thermal stability
- Meets or exceeds Stratum 3 requirements
- HCMOS/TTL compatible
- DIP packaging
- Low power consumption
- Accuracy of an OCXO

APPLICATIONS


- Telecom clock
- Instrumentation
- Wireless communications

SPECIFICATIONS

| MODEL | DC2300 |
|---------------------------------|-----------------------------------------------------------------------|
| Standard Frequencies:* | 10.00000MHz |
| Stability All Conditions: | ±0.1ppm to ±0.5ppm |
| Operating Temp. Range: | -40°C to 85°C |
| Control Voltage Range: | 0VDC to +5VDC |
| Allan Variance: | 5x10 ⁻¹⁰ at one second |
| Phase Noise: | -90dBc @ 10Hz -125dBc @ 100Hz -140dBc @ 1KHz -140dBc @ 10KHz |
| Electrical Tuning: | ±.5ppm min. for 0 to +5V |
| Power Consumption +5VDC Supply: | 35mA typical |

*Consult factory for other available frequencies.


DC2300

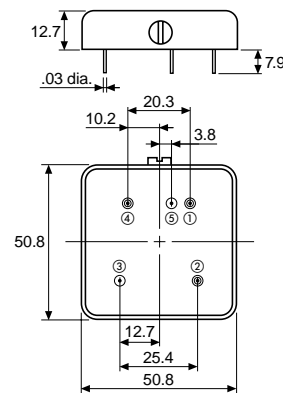





| PINS | CONNECTIONS |
|------|-------------|
| 1 | Output |
| 2 | Serial I/O |
| 3 | GND |
| 4 | +5 |
| 5 | GND |

Dimensions: mm

PART NUMBERING SYSTEM – DC2300



VCOs

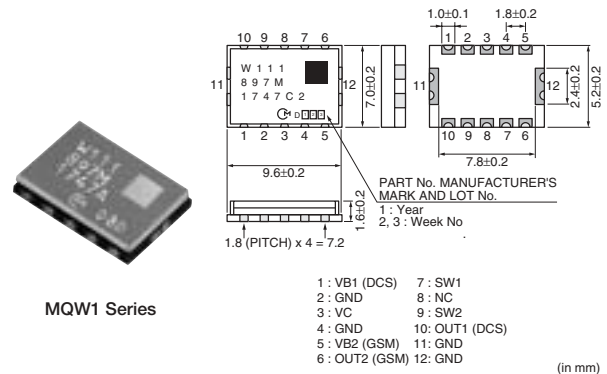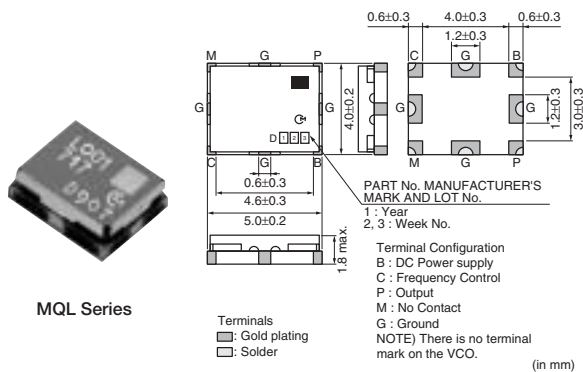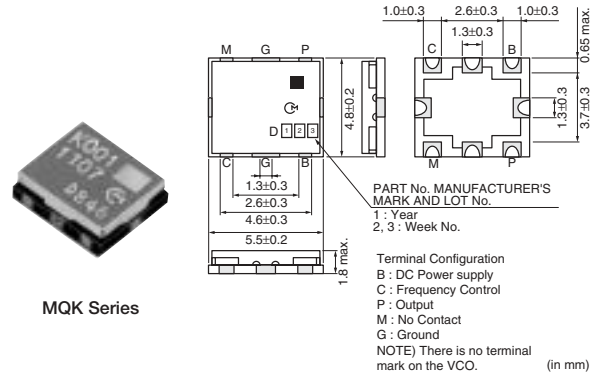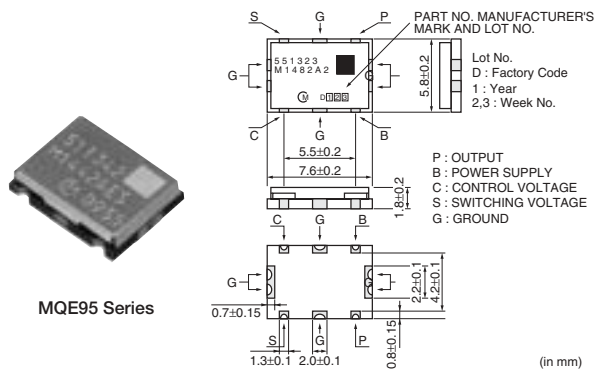

| Series | Frequency Range | Size (mm) |
|---------------------|----------------------------|------------------|
| MQE95 SERIES | 700 to 2000MHz (Shift VCO) | 7.6 X 5.8 X 1.8 |
| MQK SERIES | 700 to 2000MHz | 5.5 X 4.8 X 1.65 |
| MQL SERIES | 700 to 2600MHz | 5.0 X 4.0 X 1.65 |
| MQW1 SERIES | 700 to 2000MHz (Dual VCO) | 9.6 X 7.0 X 1.65 |

Microwave Oscillators

VOLTAGE CONTROLLED (VCO) – MQE900/MQK/MQL SERIES


MQ□ Series

| Application (System) | Part Number | Frequency (MHz) | VB | Vc (V) | Control Voltage Sensitivity (MHz/V) | Output Level (dBm) | Power Consumption (mA Max) | C/N (dBc/Hz) | Separation (KHz) | |
|----------------------|-------------|-----------------|-----------------|--------|-------------------------------------|--------------------|----------------------------|--------------|------------------|---------|
| MQK Series | | | | | | | | | | |
| GSM/DCS | 1stLO | MQK001-927 | 880.0~975.0 | 2.80 | 0.5~2.3 | 71 ± 10 | -6 ± 3 | 8.0 | ≥92 | 250.0 |
| CDMA | 1stLO | MQK002-967 | 954.0~980.0 | 2.95 | 0.7~2.7 | 24 ± 6 | -1.5 ± 3 | 8.5 | ≥118 | 60.0 |
| TDMA | 1stLO | MQK001-1016A | 981.0~1072.0 | 2.10 | 0.9~3.6 | 32 ± 3 | -0.5 ± 2.5 | 7.0 | ≥117.5 | 60.0 |
| WLL | 1stLO | MQK301-1528 | 1466.0~1590.0 | 2.70 | 0.5~3.6 | 70 ± 1 | -1.3 | 12.0 | ≥120.00 | 600.0 |
| MQL Series | | | | | | | | | | |
| EPDC | 1stLO | MQL005-717 | 680.0~755.0 | 2.3 | 0.5~2.5 | 50 ± 5 | -2 ± 3 | 6.6 | ≥92 | 250.0 |
| WCDMA | 1stLO | MQL001-760 | 760.0~760.0 | 2.50 | 0.1~2.1 | 10 ± 4 | -2 ± 2.5 | 4.5 | ≥135 | 10000.0 |
| | | MQL304-2330 | 2300.0~2360.0 | 2.20 | 0.5~3.5 | 50 ± 0 | -1 ± 3 | 8.5 | ≥90 | 10.0 |
| JCDMA | 1stLO | MQL002-946 | 920.0~972.0 | 3.7 | 0.6~3.0 | 32.5 ± 4.5 | 0 ± 2 | 10.0 | ≥83 | 10.0 |
| PHS | 1stLO | MQL3H2-1668 | 1648.0~1688.0 | 2.70 | 0.5~2.2 | 31 ± 1 | ≤ 0.5 | ≤ 8 | ≥110 | 100.0 |
| PDC1.5G | 1stLO | MQL302-1619 | 1607.05~1631.05 | 2.50 | 0.45~2.45 | 27 ± 6 | -3 ± 3 | ≤ 7 | ≥100 | 100.0 |
| DCS1800 | 1stLO | MQL302-1840 | 1790.0~1891.0 | 3.70 | 0.6~3.0 | 63.5 ± 8 | 0 ± 3 | 10.0 | ≥143 | 3000.0 |
| GSM1900 | 1stLO | MQL302-1960 | 1920.0~2000.0 | 3.70 | 0.6~3.0 | 55 ± 7 | 0 ± 3 | 10.0 | ≥143 | 3000.0 |
| | | MQL301-1964 | 1920.0~2009.0 | 3.60 | 0.6~3.0 | 55 ± 7 | -1.5 ± 3 | 10.0 | ≥143 | 3000.0 |


NOT ALL PART NUMBERS ON THIS PAGE ARE CURRENTLY AVAILABLE. PLEASE CONTACT YOUR LOCAL MURATA REPRESENTATIVE FOR UPDATED INFORMATION.

VCO TYPICAL CHARACTERISTICS

C/N Level

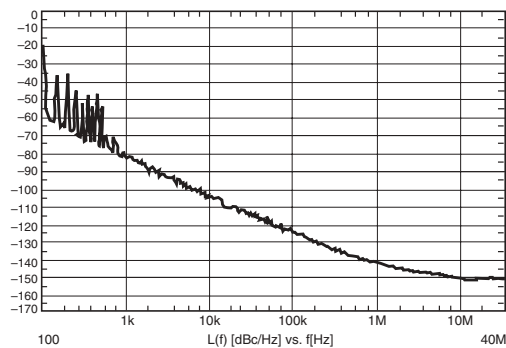


Test Circuit

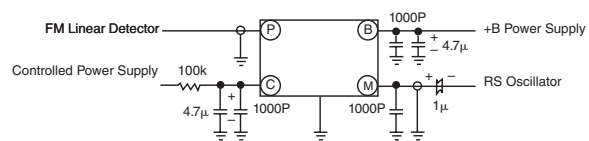


6

MOUNTING AND PACKAGING – MQE9


Recommended Mounting Dimensions: mm




Reflow Soldering Conditions

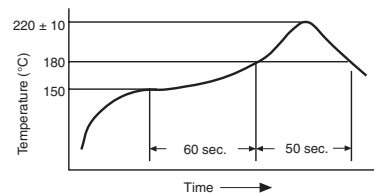





Taping Specifications: mm

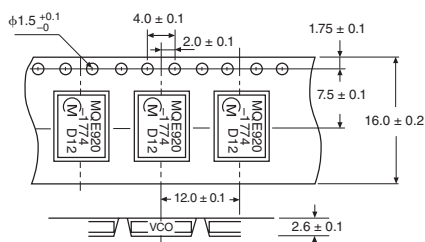

Reel Dimensions: mm

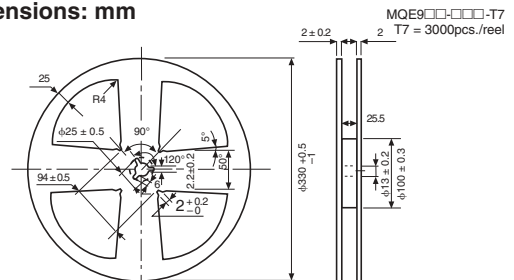

PLL Modules

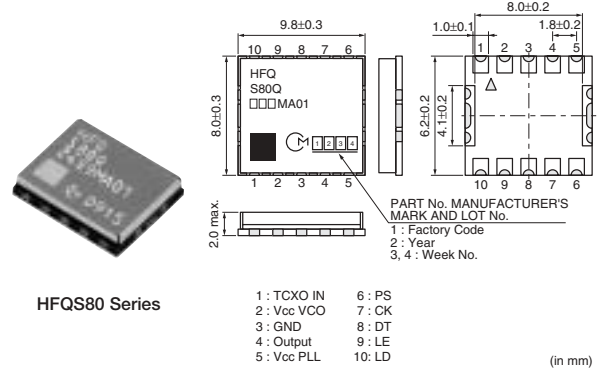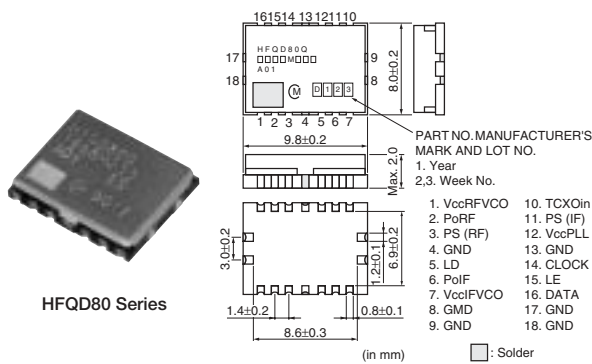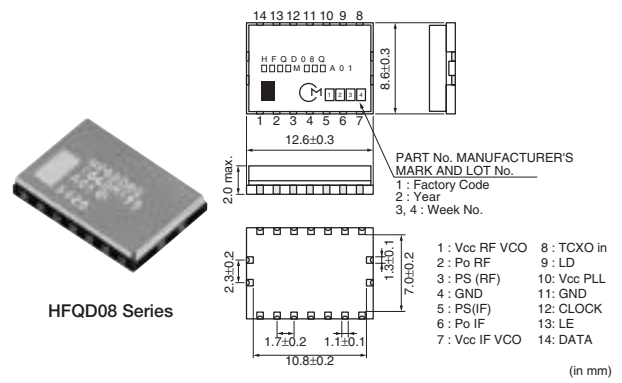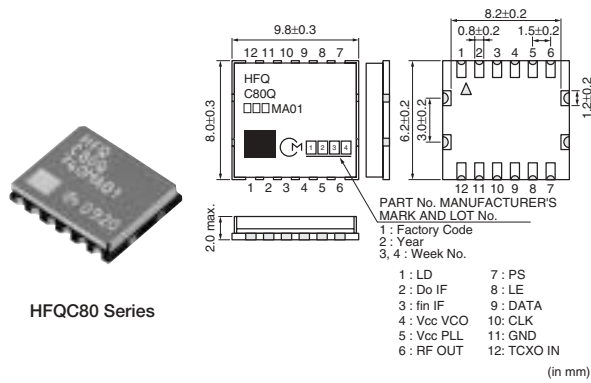

| Series | RF/Local Frequency Limits | IF/Local Frequency Limits | Module Structure | Size (mm) |
|----------------------|---------------------------|---------------------------|-----------------------------|-------------------|
| HFQC80 SERIES | 700 to 2000MHz | Only IF Port | RFVCO+Dual PLLIC (for CDMA) | 9.8 X 8.0 X 1.85 |
| HFQD08 SERIES | 700 to 2000MHz | 100 to 350MHz | RFVCO+IFVCO+Dual PLLIC | 12.6 X 8.6 X 1.85 |
| HFQD80 SERIES | 700 to 2600MHz | 100 to 760MHz | RFVCO+IFVCO+Dual PLLIC | 9.8 X 8.0 X 1.85 |
| HFQS80 SERIES | 700 to 2500MHz | - | RFVCO+PLLIC | 9.8 X 8.0 X 1.85 |

Microwave Oscillators

PHASE LOCK LOOP MODULE – HFQD08/HFQS14/HFQS80 SERIES


PLL MODULES

| Application | | Part Number | Operating Frequency Range (MHz) | Supply Voltage (1) (V) | Output Level (dBm) | Power Consumption (mA max.) | C/N (2) (dBc/Hz min.) | Lock-up Time (msec.max.) |
|-------------|-------|-------------------|---------------------------------|------------------------|--------------------|-----------------------------|-----------------------|--------------------------|
| VICS | Tx/Rx | HFQS80Q2489MA01 | 2489 | 3.0 ± 0.2 | 0 ± 3 | 23 | -110 | 5.0 |
| N-CDMA800 | Tx/Rx | HFQD08B740M440A01 | 741.5 ± 19.5 | 2.8 ± 0.1 | -4 ± 2.5 | 20 | -138 | 5.0 |
| ISM5.8 | Tx/Rx | HFQS14D5820MA01 | 5820 ± 25 | 5.0 (3.0) | 0 ± 3 | 37 | — | 1.0 |

(1) = Vcc1 (3.0) for VCO + Doubler, Vcc1 (5.0) for PLL-IC

(2) = Separation (kHz)

■ BLOCK DIAGRAM

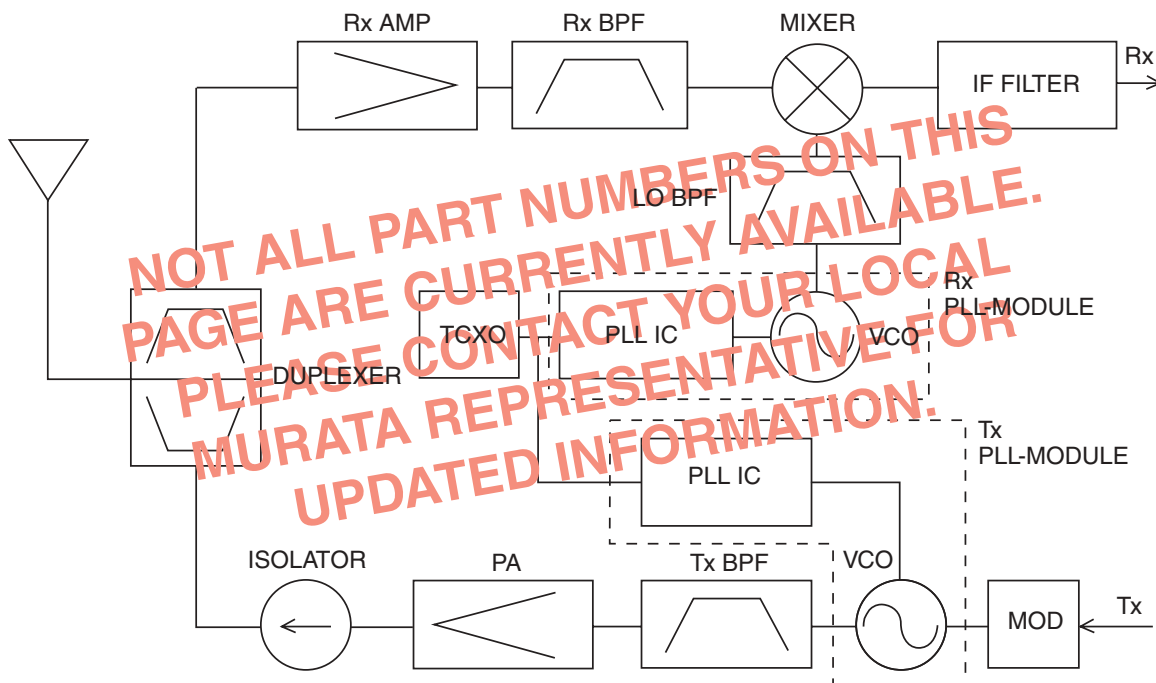

All information contained in
this catalog is available in
PDF downloadable format at
www.murata.com.



Innovator in Electronics

Marketing Communications
2200 Lake Park Drive
Smyrna, Georgia 30080
Tel: 770-436-1300
Fax: 770-436-3030
www.murata.com