

PRELIMINARY DATA SHEET

NEC**Silicon Transistor**
2SC5336**NPN EPITAXIAL SILICON TRANSISTOR**
HIGH FREQUENCY LOW DISTORTION AMPLIFIER**FEATURES**

- High gain
| S_{21} |² = 12 dB TYP, @f = 1 GHz, V_{CE} = 10 V, I_C = 20 mA
- New power mini-mold package version of a 4-pin type
gain-improved on the 2SC3357

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	20	V
Collector to Emitter Voltage	V_{CEO}	12	V
Emitter to Base Voltage	V_{EBO}	3.0	V
Collector Current	I_C	100	mA
Total Power Dissipation	P_T ^{Note1}	1.2	W
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature	T_{slg}	-65 to +150	$^\circ\text{C}$

Note 1. 0.7 mm \times 16 cm² double sided ceramic substrate (Copper plating)

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = 10\text{ V}, I_E = 0$			1.0	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 1\text{ V}, I_C = 0$			1.0	μA
DC Current Gain	h_{FE}	$V_{CE} = 10\text{ V}, I_C = 20\text{ mA}$ ^{Note2}	50	120	250	
Gain Bandwidth Product	f_T	$V_{CE} = 10\text{ V}, I_C = 20\text{ mA}$		6.5		GHz
Feed-back Capacitance	C_{re}	$V_{CB} = 10\text{ V}, I_E = 0, f = 1.0\text{ MHz}$ ^{Note3}		0.5	0.8	pF
Insertion Power Gain	S_{21e} ²	$V_{CE} = 10\text{ V}, I_C = 20\text{ mA}, f = 1.0\text{ GHz}$		12.0		dB
Noise Figure	NF	$V_{CE} = 10\text{ V}, I_C = 7\text{ mA}, f = 1.0\text{ GHz}$		1.1		dB
Noise Figure	NF	$V_{CE} = 10\text{ V}, I_C = 40\text{ mA}, f = 1.0\text{ GHz}$		1.8	3.0	dB

Notes 2. Pulse measurement : $PW \leq 350\text{ }\mu\text{S}$, Duty Cycle $\leq 2\%$


3. Measured by a 3-terminal bridge. Emitter and Case should be connected to the guard terminal.

 h_{FE} Classification

Rank	RH	RF	RE
Marking	RH	RF	RE
h_{FE}	50 to 100	80 to 160	125 to 250







PACKAGE DIMENSIONS



(in millimeters)

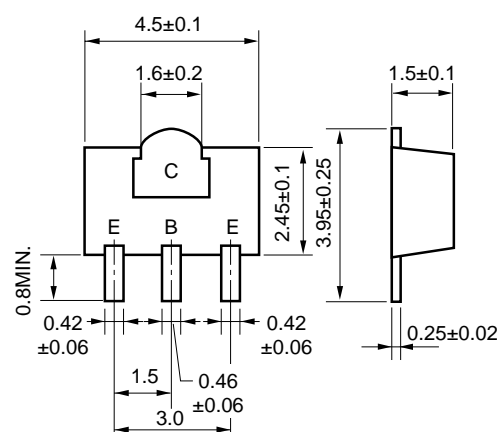**PIN CONNECTIONS**

E: Emitter
C: Collector
B: Base

TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

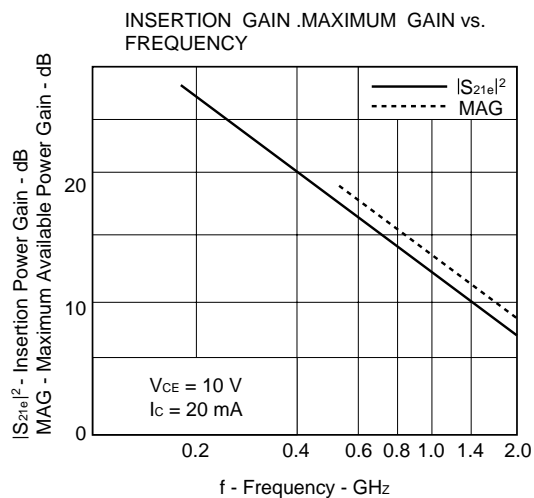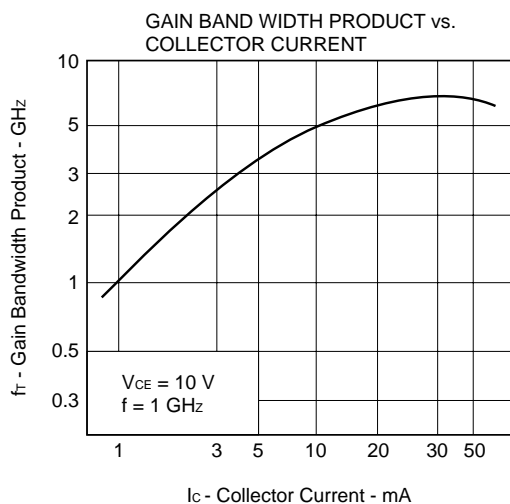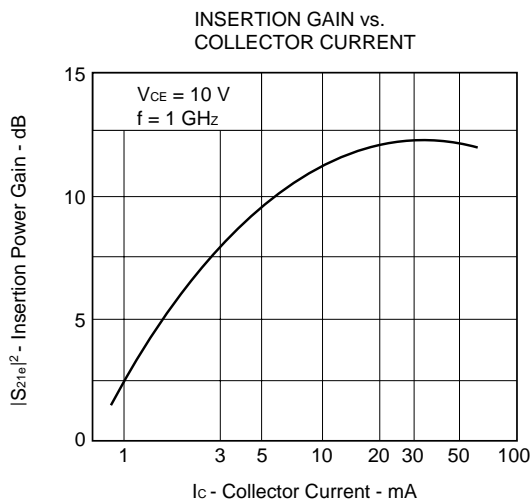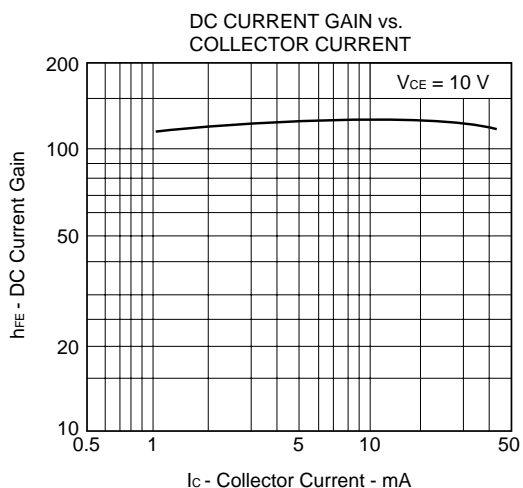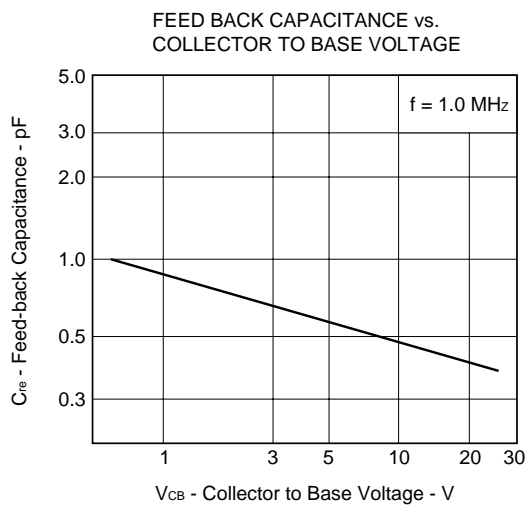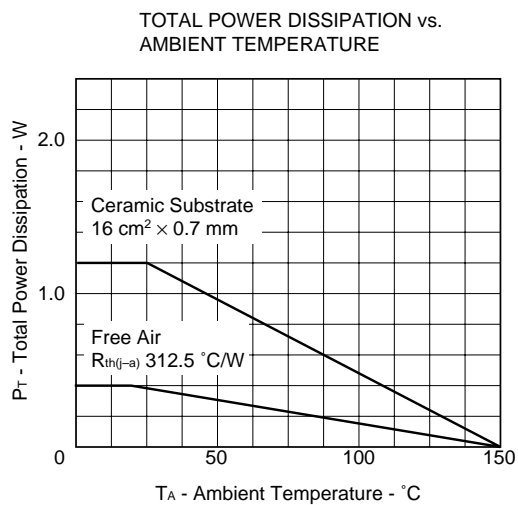

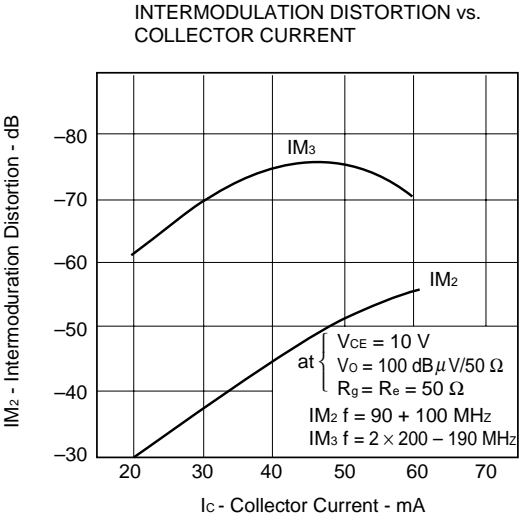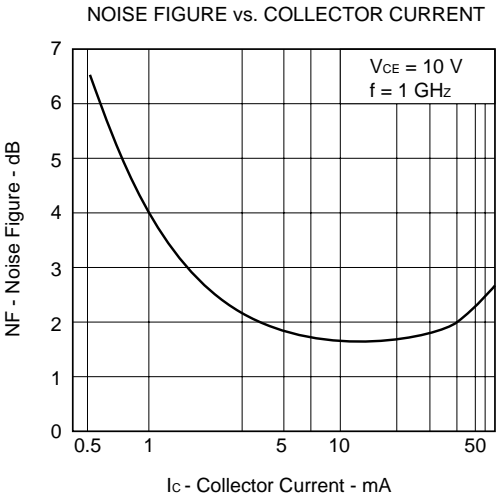

S-PARAMETER

$V_{CE} = 10\text{ V}$, $I_C = 20\text{ mA}$

f (MHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100	.519	– 74.5	30.931	131.9	.017	60.6	.752	– 30.2
200	.413	– 112.9	18.965	111.5	.031	61.9	.570	– 39.7
300	.413	– 133.4	13.324	101.9	.038	65.1	.465	– 39.8
400	.345	– 145.7	10.164	95.9	.045	69.8	.428	– 40.1
500	.331	– 153.8	8.177	91.8	.055	71.8	.436	– 41.1
600	.320	– 159.6	6.834	89.1	.064	70.9	.438	– 43.5
700	.302	– 166.8	5.832	86.7	.074	73.9	.434	– 47.5
800	.296	– 169.2	5.107	84.3	.077	74.4	.429	– 47.8
900	.283	– 173.2	4.600	83.1	.088	71.2	.436	– 46.5
1000	.285	– 179.8	4.200	82.3	.097	74.5	.455	– 47.8
1100	.265	175.2	3.930	80.8	.100	76.3	.467	– 46.8
1200	.260	174.1	3.979	78.5	.109	75.9	.529	– 47.4
1300	.263	166.0	3.741	68.6	.114	76.8	.551	– 55.8
1400	.242	163.0	3.115	66.6	.119	78.3	.509	– 55.8
1500	.252	160.1	2.844	65.7	.133	82.0	.510	– 58.5
1600	.253	154.0	2.595	64.1	.140	81.0	.496	– 55.2
1700	.253	149.9	2.420	63.7	.158	80.9	.515	– 54.8
1800	.257	147.2	2.305	63.0	.165	82.2	.518	– 56.5
1900	.262	143.0	2.171	62.6	.172	80.5	.536	– 58.6
2000	.273	141.5	2.049	61.2	.177	78.3	.524	– 61.5

S-PARAMETER

$V_{CE} = 10\text{ V}$, $I_C = 40\text{ mA}$

f (MHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100	.378	– 97.1	32.908	123.3	.017	71.1	.665	– 34.7
200	.317	– 131.8	18.819	106.0	.027	71.2	.487	– 38.7
300	.308	– 150.1	12.955	97.5	.035	71.8	.398	– 38.5
400	.299	– 158.7	9.775	93.1	.042	78.1	.393	– 36.9
500	.297	– 165.5	7.899	89.8	.052	78.5	.399	– 37.6
600	.288	– 169.2	6.586	87.6	.061	79.1	.407	– 39.9
700	.274	– 173.7	5.607	85.2	.071	77.4	.400	– 44.6
800	.261	– 177.3	4.879	83.5	.081	76.4	.415	– 47.4
900	.255	178.9	4.435	82.2	.092	76.5	.399	– 46.2
1000	.260	173.0	4.024	81.4	.095	77.6	.440	– 44.3
1100	.243	169.4	3.801	80.6	.098	77.1	.441	– 45.2
1200	.239	169.3	3.827	78.2	.109	78.3	.494	– 46.2
1300	.245	160.3	3.587	68.4	.117	78.0	.517	– 55.4
1400	.216	157.8	2.980	66.0	.125	80.3	.486	– 54.5
1500	.235	155.3	2.726	66.1	.137	86.5	.500	– 59.0
1600	.243	148.8	2.537	64.0	.143	80.6	.474	– 53.7
1700	.233	146.0	2.348	64.2	.159	81.2	.496	– 56.8
1800	.242	144.6	2.200	63.5	.163	80.4	.491	– 53.6
1900	.249	141.9	2.073	63.3	.171	81.7	.534	– 58.0
2000	.260	140.4	1.986	61.7	.184	77.5	.535	– 61.3

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customer must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

“Standard”, “Special”, and “Specific”. The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard : Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices in “Standard” unless otherwise specified in NEC's Data Sheets or Data Books.

If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact NEC Sales Representative in advance.

Anti-radioactive design is not implemented in this product.