


# ZENER DIODES

## RD4.7P ~ RD39P

### 1 W POWER MINI MOLD ZENER DIODE

NEC Type RD[ ] P Series are Power Mini Mold Package zener diodes possessing an allowable power dissipation of 1 watt.

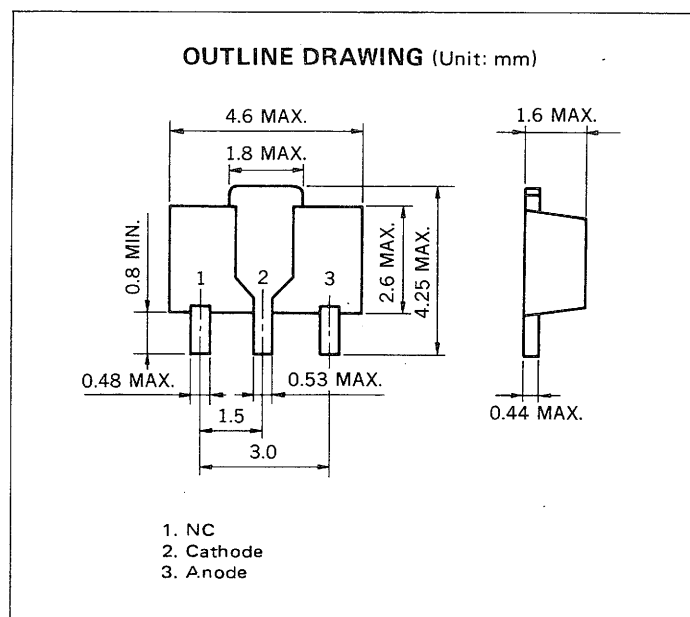

#### FEATURES

- Very small size to assure good space factor in hybrid IC applications.
- $V_Z$ ; Applied E24 standard.

#### MAXIMUM RATINGS

Power Dissipation (P)	1.0 W
Junction Temperature ( $T_j$ )	150 °C
Storage Temperature ( $T_{stg}$ )	-55 to +150 °C

Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )

Type Name	Suffix	Zener Voltage $V_Z(\text{V})^*$			Dynamic Impedance $Z_Z(\Omega)^{**}$		Reverse Current $I_R(\mu\text{A})$	
		MIN.	MAX.	$I_Z(\text{mA})$	MAX.	$I_Z(\text{mA})$	MAX.	$V_R(\text{V})$
RD4.7P	B	4.4	4.9	5	80	5	20	1.0
RD5.1P	B	4.8	5.4	5	60	5	20	1.0
RD5.6P	B	5.3	6.0	5	40	5	20	1.5
RD6.2P	B	5.8	6.6	5	10	5	20	3.0
RD6.8P	B	6.4	7.2	5	15	5	20	3.5
RD7.5P	B	7.0	7.9	5	15	5	20	4.0
RD8.2P	B	7.7	8.7	5	15	5	20	5.0
RD9.1P	B	8.5	9.6	5	15	5	20	6.0
RD10P	B	9.4	10.6	5	20	5	10	7.0
RD11P	B	10.4	11.6	5	20	5	10	8.0
RD12P	B	11.4	12.6	5	25	5	10	9.0
RD13P	B	12.4	14.1	5	30	5	10	10
RD15P	B	13.8	15.6	5	30	5	10	11
RD16P	B	15.3	17.1	5	40	5	10	12
RD18P	B	16.8	19.1	5	45	5	10	13
RD20P	B	18.8	21.2	5	55	5	10	15
RD22P	B	20.8	23.3	5	55	5	10	17
RD24P	B	22.8	25.6	5	70	5	10	19
RD27P	B	25.1	28.9	2	80	2	10	21
RD30P	B	28.0	32.0	2	80	2	10	23
RD33P	B	31.0	35.0	2	80	2	10	25
RD36P	B	34.0	38.0	2	90	2	10	27
RD39P	B	37.0	41.0	2	130	2	10	30

\* Tested with pulse (40 ms).

\*\*  $Z_Z$  is measured at  $I_Z$  by given a very small A.C. current signal.

Fig. 1 P-T<sub>a</sub> Rating






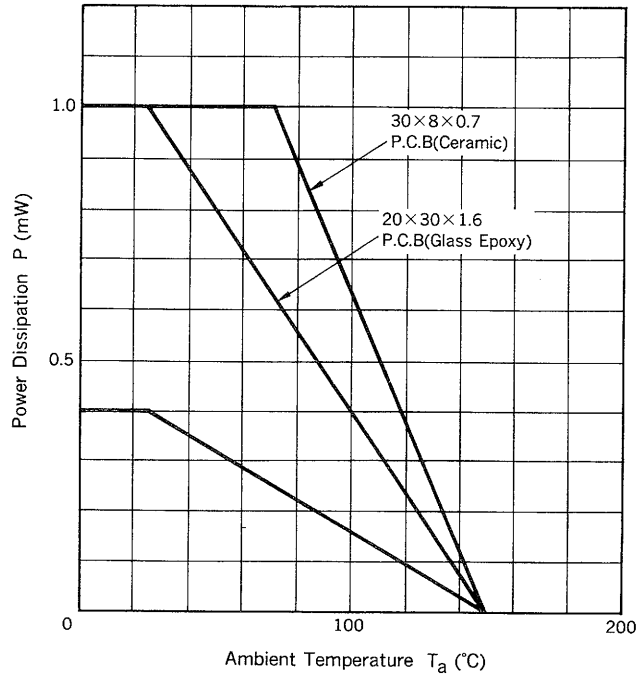


Fig. 2  $i_z$ - $v_z$  Characteristics



Fig. 3  $\gamma_Z$ - $V_Z$  Characteristics

**Fig. 4  $Z_z$ - $I_z$  Characteristics**

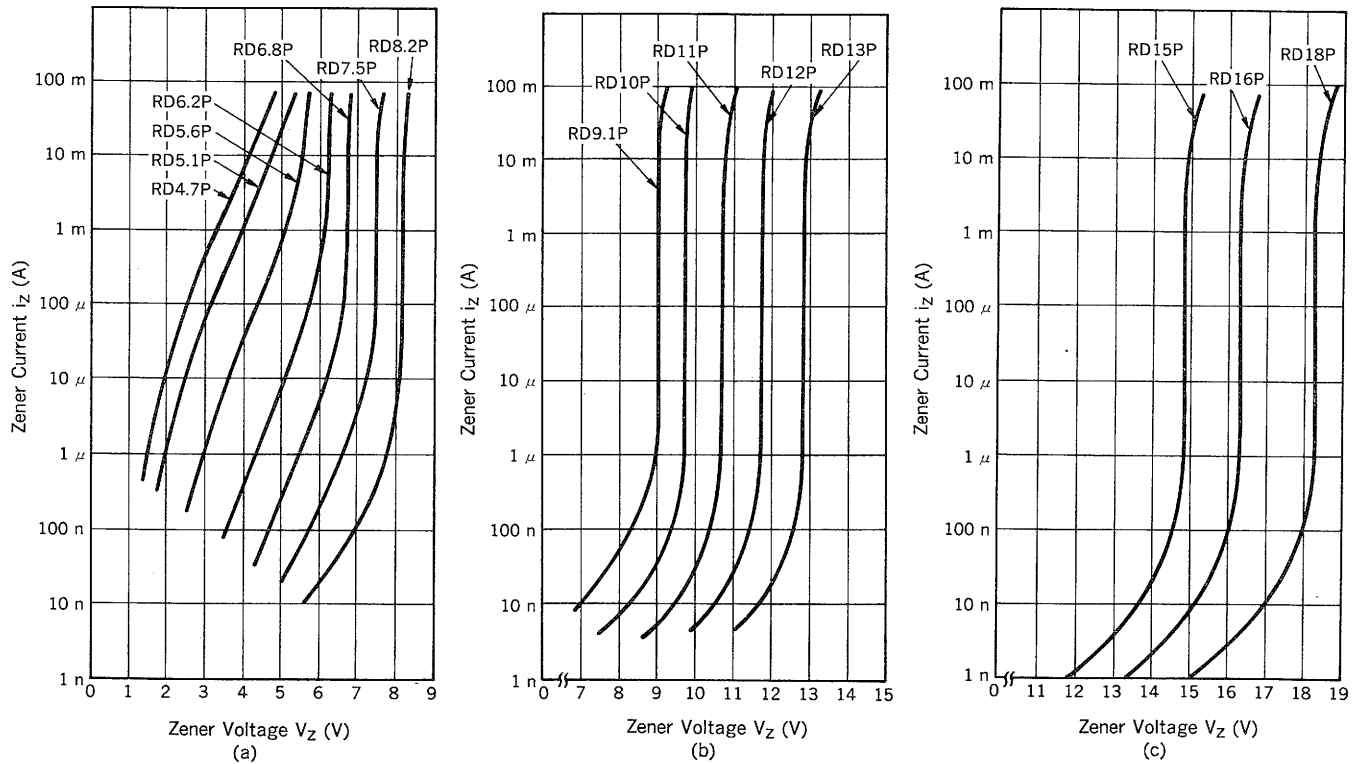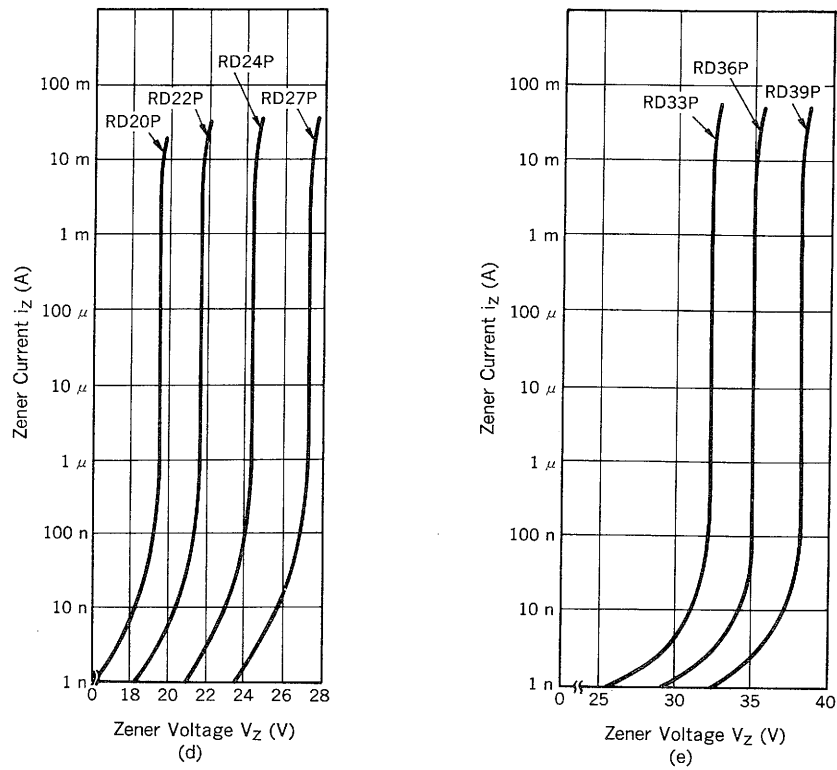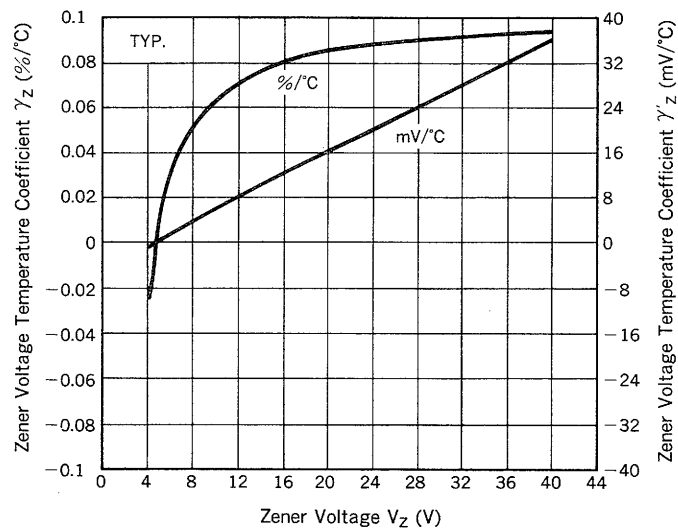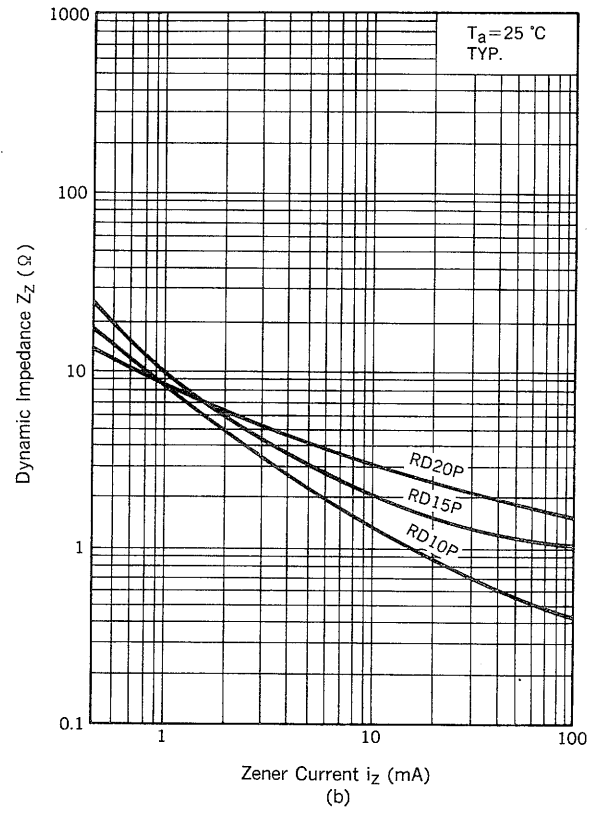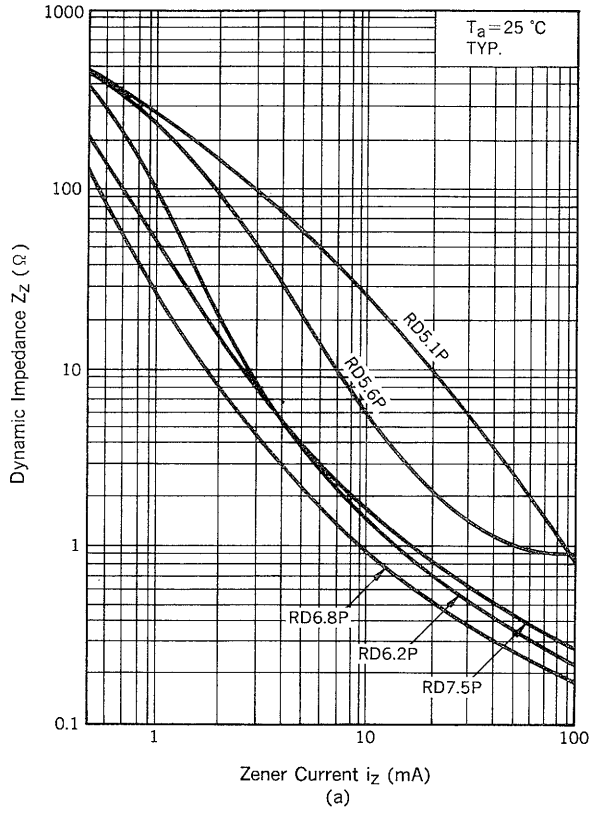

---

## NEC Corporation

INTERNATIONAL ELECTRON DEVICES DIV.  
NEC Building, 33-1, Shiba Gocho  
Minato-ku, Tokyo 108, Japan  
Tel: Tokyo 454-1111  
Telex Address: NECTOK J22686  
Cable Address: MICROPHONE TOKYO