


OMRON

EE-SA107-P2


Photomicrosensor (Actuator Mounted)

■ Dimensions

Note: All units are in millimeters unless otherwise indicated.

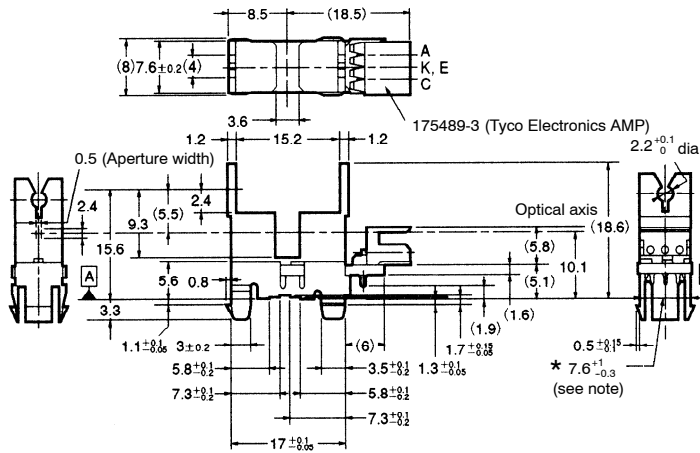

Internal Circuit



Note: The asterisked dimension is specified by datum A only.

Unless otherwise specified, the tolerances are as shown below.

Dimensions	Tolerance
3 mm max.	±0.3
3 < mm ≤ 6	±0.375
6 < mm ≤ 10	±0.45
10 < mm ≤ 18	±0.55
18 < mm ≤ 30	±0.65

Terminal No.	Name
A	Anode
C	Collector
K, E	Cathode, Emitter

Recommended Mating Connectors:

Tyco Electronics AMP 173977-3 (insulation displacement-type connector)
175778-3 (crimp-type connector)
179228-3 (crimp-type connector)

■ Features

- An actuator can be attached.
- Snap-in mounting model.
- Mountable to 1.0-, 1.2- and 1.6-mm-thick boards.
- Connects to Tyco Electronics AMP's CT-series connectors.

■ Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Rated value
Emitter	Forward current	I _F 50 mA (see note)
	Pulse forward current	I _{FP} ---
	Reverse voltage	V _R 4 V
Detector	Collector-Emitter voltage	V _{CEO} 30 V
	Emitter-Collector voltage	V _{ECO} 5 V
	Collector current	I _C 20 mA
	Collector dissipation	P _C 100 mW (see note 1)
Ambient temperature	Operating	T _{opr} -25°C to 85°C
	Storage	T _{stg} -40°C to 85°C
Soldering temperature		T _{sol} ---

Note: Refer to the temperature rating chart if the ambient temperature exceeds 25°C.

■ Ordering Information


Description	Part number
Photomicrosensor (Actuator Mounted)	EE-SA107-P2

■ Electrical and Optical Characteristics (Ta = 25°C)


Item	Symbol	Value	Condition
Emitter	Forward voltage	V _F 1.2 V typ., 1.5 V max.	I _F = 30 mA
	Reverse current	I _R 0.01 μA typ., 10 μA max.	V _R = 4 V
	Peak emission wavelength	λ _P 940 nm typ.	I _F = 30 mA
Detector	Light current	I _L 0.5 mA min., 14 mA max.	I _F = 20 mA, V _{CE} = 5 V
	Dark current	I _D 200 nA max.	V _{CE} = 10 V, 0 lx
	Leakage current	I _{LEAK} ---	---
	Collector-Emitter saturated voltage	V _{CE} (sat) 0.1 V typ., 0.4 V max.	I _F = 20 mA, I _L = 0.3 mA
	Peak spectral sensitivity wavelength	λ _P 850 nm typ.	V _{CE} = 5 V
Rising time	t _r	8 μs typ.	V _{CC} = 5 V, R _L = 100 Ω, I _L = 1 mA
Falling time	t _f	8 μs typ.	V _{CC} = 5 V, R _L = 100 Ω, I _L = 1 mA

Engineering Data


Forward Current vs. Collector Dissipation Temperature Rating

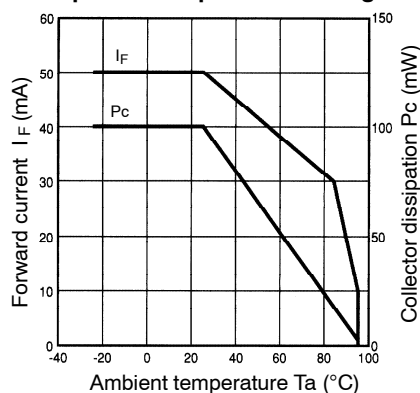


Light Current vs. Collector-Emitter Voltage Characteristics (Typical)

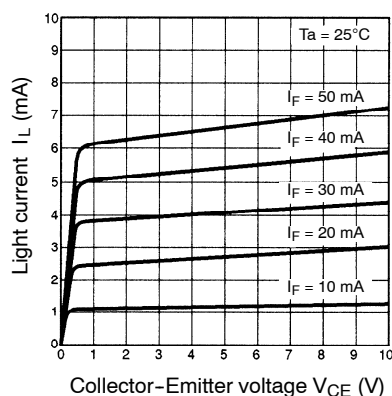


Response Time vs. Load Resistance Characteristics (Typical)

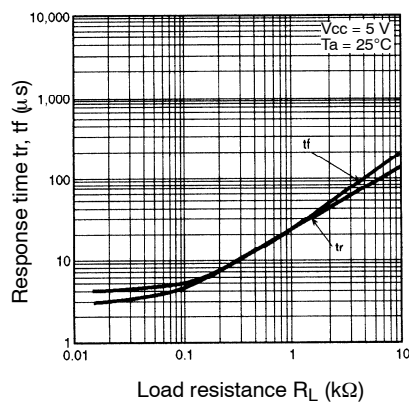


Actuator Dimensions

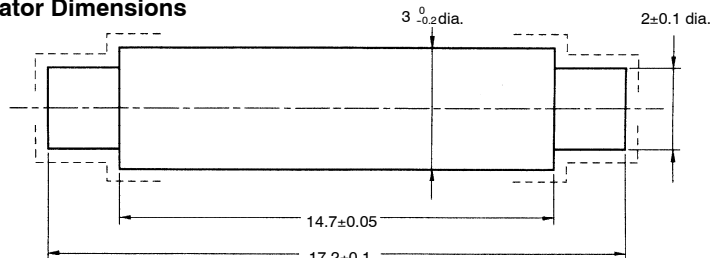


Forward Current vs. Forward Voltage Characteristics (Typical)

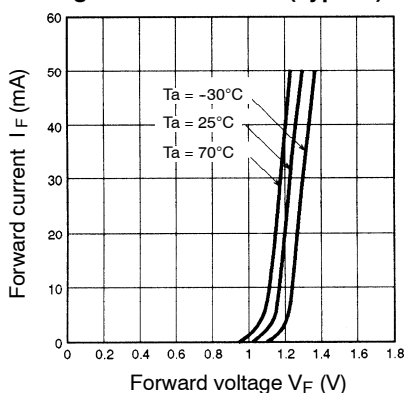


Relative Light Current vs. Ambient Temperature Characteristics (Typical)

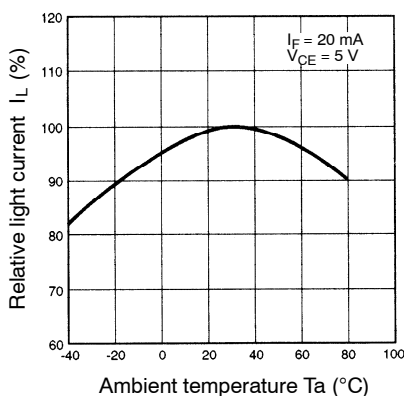


Sensing Position Characteristics (Typical)

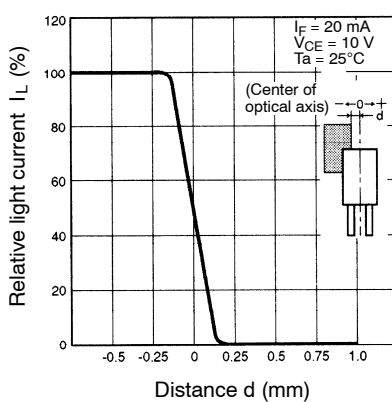


Light Current vs. Forward Current Characteristics (Typical)

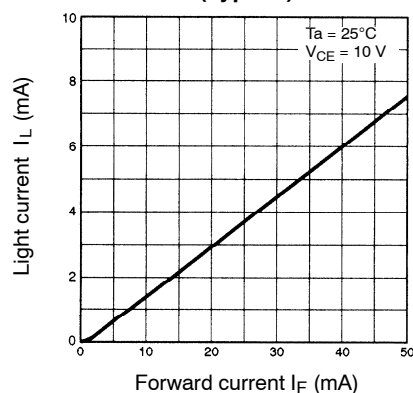

Dark Current vs. Ambient Temperature Characteristics (Typical)

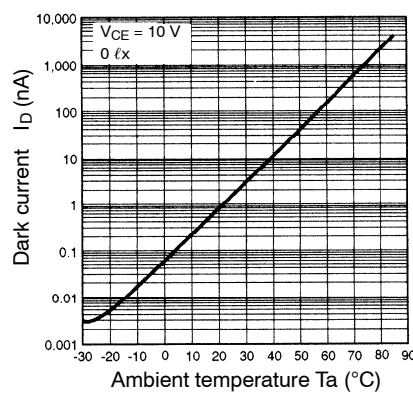

Response Time Measurement Circuit

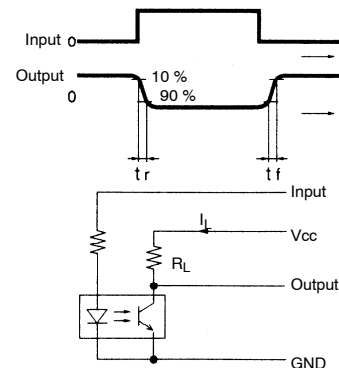

- Note:**
1. Make sure that the portions marked with dotted lines have no burrs.
 2. The material of the actuator must be selected by considering the infrared permeability of the actuator.

NOTE: DIMENSIONS SHOWN ARE IN MILLIMETERS. To convert millimeters to inches divide by 25.4.

OMRON[®]**OMRON ELECTRONICS LLC**One East Commerce Drive
Schaumburg, IL 60173**847-882-2288****OMRON CANADA, INC.**885 Milner Avenue
Toronto, Ontario M1B 5V8**416-286-6465****OMRON ON-LINE**Global – <http://www.omron.com>USA – <http://www.omron.com/oei>Canada – <http://www.omron.com/oci>