

NCP302, NCP303

Voltage Detector Series with Programmable Delay

The NCP302 and NCP303 series are second generation ultra-low current voltage detectors that contain a programmable time delay generator. These devices are specifically designed for use as reset controllers in portable microprocessor based systems where extended battery life is paramount.

Each series features a highly accurate undervoltage detector with hysteresis and an externally programmable time delay generator. This combination of features prevents erratic system reset operation.

The NCP302 series consists of complementary output devices that are available with either an active high or active low reset. The NCP303 series has an open drain N-Channel output with an active low reset output.

Features

- Quiescent Current of 0.5 μ A Typical
- High Accuracy Undervoltage Threshold of 2.0%
- Externally Programmable Time Delay Generator
- Wide Operating Voltage Range of 0.8 V to 10 V
- Complementary or Open Drain Output
- Active Low or Active High Reset
- Pb-Free Packages are Available


Typical Applications

- Microprocessor Reset Controller
- Low Battery Detection
- Power Fail Indicator
- Battery Backup Detection



ON Semiconductor®


<http://onsemi.com>



1

**THIN SOT23-5/TSOP-5/SC59-5
CASE 483**



PIN CONNECTIONS AND MARKING DIAGRAM



xxx = Specific Device Code
Y = Year
W = Work Week

ORDERING INFORMATION

See detailed ordering and shipping information in the ordering information section on page 22 of this data sheet.

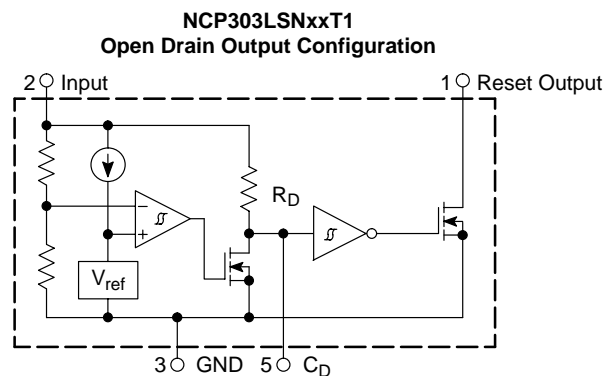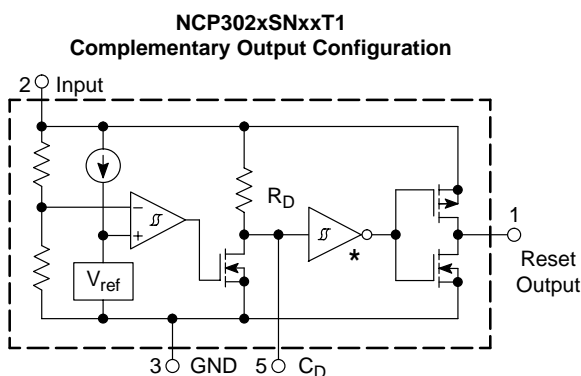

* Inverter for active low devices.
Buffer for active high devices.

This device contains 28 active transistors.

Figure 1. Representative Block Diagrams

NCP302, NCP303

MAXIMUM RATINGS

| Rating | Symbol | Value | Unit |
|---|-----------------|--------------------------------------|------|
| Input Power Supply Voltage (Pin 2) | V_{in} | 12 | V |
| Delay Capacitor Pin Voltage (Pin 5) | V_{CD} | -0.3 to $V_{in} + 0.3$ | V |
| Output Voltage (Pin 1) Complementary, NCP302 N-Channel Open Drain, NCP303 | V_{OUT} | -0.3 to $V_{in} + 0.3$ -0.3 to 12 | V |
| Output Current (Pin 1) (Note 2) | I_{OUT} | 70 | mA |
| Thermal Resistance Junction-to-Air | $R_{\theta JA}$ | 250 | °C/W |
| Maximum Junction Temperature | T_J | +125 | °C |
| Operating Ambient Temperature Range | T_A | -40 to +85 | °C |
| Storage Temperature Range | T_{stg} | -55 to +150 | °C |
| Moisture Sensitivity Level ($T_A = 235^\circ\text{C}$) | MSL | 1 | |
| Latchup Performance Positive Negative | $I_{LATCHUP}$ | 200 200 | mA |

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

- This device series contains ESD protection and exceeds the following tests:
Human Body Model 2000 V per MIL-STD-883, Method 3015.
Machine Model Method 200 V.
- The maximum package power dissipation limit must not be exceeded.

$$P_D = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$

NCP302, NCP303

ELECTRICAL CHARACTERISTICS (For all values $T_A = 25^\circ\text{C}$, unless otherwise noted.)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|--|---------------|------------------------|---------------------|--------------|------------------|
| NCP302/3 – 0.9 | | | | | |
| Detector Threshold (Pin 2, V_{in} Decreasing) | V_{DET-} | 0.882 | 0.900 | 0.918 | V |
| Detector Threshold Hysteresis (Pin 2, V_{in} Increasing) | V_{HYS} | 0.027 | 0.045 | 0.063 | V |
| Supply Current (Pin 2) ($V_{in} = 0.8\text{ V}$) ($V_{in} = 2.9\text{ V}$) | I_{in} | – – | 0.20 0.45 | 0.6 1.2 | μA |
| Maximum Operating Voltage (Pin 2) | $V_{in(max)}$ | – | – | 10 | V |
| Minimum Operating Voltage (Pin 2) ($T_A = -40^\circ\text{C}$ to 85°C) | $V_{in(min)}$ | – – | 0.55 0.65 | 0.70 0.80 | V |
| Reset Output Current (Pin 1, Active Low 'L' Suffix Devices) Nch Sink Current, NCP302, NCP303 ($V_{OUT} = 0.05\text{V}$, $V_{in} = 0.70\text{V}$) ($V_{OUT} = 0.50\text{V}$, $V_{in} = 0.85\text{V}$) Pch Source Current, NCP302 ($V_{OUT} = 2.4\text{V}$, $V_{in} = 4.5\text{V}$) | I_{OUT} | 0.01 0.05 1.0 | 0.05 0.50 6.0 | – – – | mA |
| Reset Output Current (Pin 1, Active High 'H' Suffix Devices) Nch Sink Current, NCP302, NCP303 ($V_{OUT} = 0.5\text{ V}$, $V_{in} = 1.5\text{ V}$) Pch Source Current, NCP302 ($V_{OUT} = 0.4\text{ V}$, $V_{in} = 0.7\text{ V}$) ($V_{OUT} = \text{GND}$, $V_{in} = 0.8\text{ V}$) | I_{OUT} | 1.05 0.011 0.014 | 2.5 0.04 0.08 | – – – | mA |
| C_D Delay Pin Threshold Voltage (Pin 5) ($V_{in} = 0.99\text{ V}$) | V_{TCD} | 0.50 | 0.67 | 0.84 | V |
| Delay Capacitor Pin Sink Current (Pin 5) ($V_{in} = 0.7\text{ V}$, $V_{CD} = 0.1\text{V}$) ($V_{in} = 0.85\text{ V}$, $V_{CD} = 0.5\text{V}$) | I_{CD} | 2.0 10 | 120 300 | – – | μA |
| Delay Pullup Resistance (Pin 5) | R_D | 0.5 | 1.0 | 2.0 | $\text{M}\Omega$ |

NCP302/3 – 1.8

| | | | | | |
|--|---------------|-----------------------|--------------------|--------------|---------------|
| Detector Threshold (Pin 2, V_{in} Decreasing) | V_{DET-} | 1.764 | 1.80 | 1.836 | V |
| Detector Threshold Hysteresis (Pin 2, V_{in} Increasing) | V_{HYS} | 0.054 | 0.090 | 0.126 | V |
| Supply Current (Pin 2) ($V_{in} = 1.7\text{ V}$) ($V_{in} = 3.8\text{ V}$) | I_{in} | – – | 0.23 0.48 | 0.7 1.3 | μA |
| Maximum Operating Voltage (Pin 2) | $V_{in(max)}$ | – | – | 10 | V |
| Minimum Operating Voltage (Pin 2) ($T_A = -40^\circ\text{C}$ to 85°C) | $V_{in(min)}$ | – – | 0.55 0.65 | 0.70 0.80 | V |
| Reset Output Current (Pin 1, Active Low 'L' Suffix Devices) Nch Sink Current, NCP302, NCP303 ($V_{OUT} = 0.05\text{V}$, $V_{in} = 0.70\text{V}$) ($V_{OUT} = 0.50\text{V}$, $V_{in} = 1.5\text{V}$) Pch Source Current, NCP302 ($V_{OUT} = 2.4\text{V}$, $V_{in} = 4.5\text{V}$) | I_{OUT} | 0.01 1.0 1.0 | 0.05 2.0 6.0 | – – – | mA |
| Reset Output Current (Pin 1, Active High 'H' Suffix Devices) Nch Sink Current, NCP302, NCP303 ($V_{OUT} = 0.5\text{ V}$, $V_{in} = 5.0\text{ V}$) Pch Source Current, NCP302 ($V_{OUT} = 0.4\text{ V}$, $V_{in} = 0.7\text{ V}$) ($V_{OUT} = \text{GND}$, $V_{in} = 1.5\text{ V}$) | I_{OUT} | 6.3 0.011 0.525 | 11 0.04 0.6 | – – – | mA |

NCP302, NCP303

ELECTRICAL CHARACTERISTICS (continued) (For all values $T_A = 25^\circ\text{C}$, unless otherwise noted.)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|--|---------------|---------------------------|------------------------|-----------------|------------------|
| NCP302/3 – 1.8 | | | | | |
| C_D Delay Pin Threshold Voltage (Pin 5) ($V_{in} = 1.98\text{ V}$) | V_{TCD} | 0.99 | 1.34 | 1.68 | V |
| Delay Capacitor Pin Sink Current (Pin 5) ($V_{in} = 0.7\text{ V}$, $V_{CD} = 0.1\text{ V}$) ($V_{in} = 1.5\text{ V}$, $V_{CD} = 0.5\text{ V}$) | I_{CD} | 2.0 200 | 120 1600 | – – | μA |
| Delay Pullup Resistance (Pin 5) | R_D | 0.5 | 1.0 | 2.0 | $\text{M}\Omega$ |
| NCP302/3 – 2.0 | | | | | |
| Detector Threshold (Pin 2, V_{in} Decreasing) | V_{DET-} | 1.960 | 2.00 | 2.040 | V |
| Detector Threshold Hysteresis (Pin 2, V_{in} Increasing) | V_{HYS} | 0.06 | 0.10 | 0.14 | V |
| Supply Current (Pin 2) ($V_{in} = 1.9\text{ V}$) ($V_{in} = 4.0\text{ V}$) | I_{in} | – – | 0.23 0.48 | 0.8 1.3 | μA |
| Maximum Operating Voltage (Pin 2) | $V_{in(max)}$ | – | – | 10 | V |
| Minimum Operating Voltage (Pin 2) ($T_A = -40^\circ\text{C}$ to 85°C) | $V_{in(min)}$ | – – | 0.55 0.65 | 0.70 0.80 | V |
| Reset Output Current (Pin 1, Active Low 'L' Suffix Devices) Nch Sink Current, NCP302, NCP303 ($V_{OUT} = 0.05\text{ V}$, $V_{in} = 0.70\text{ V}$) ($V_{OUT} = 0.50\text{ V}$, $V_{in} = 1.5\text{ V}$) Pch Source Current, NCP302 ($V_{OUT} = 2.4\text{ V}$, $V_{in} = 4.5\text{ V}$) | I_{OUT} | 0.01 1.0 1.0 | 0.05 2.0 6.0 | – – – | mA |
| Reset Output Current (Pin 1, Active High 'H' Suffix Devices) Nch Sink Current, NCP302, NCP303 ($V_{OUT} = 0.5\text{ V}$, $V_{in} = 5.0\text{ V}$) Pch Source Current, NCP302 ($V_{OUT} = 0.4\text{ V}$, $V_{in} = 0.7\text{ V}$) ($V_{OUT} = \text{GND}$, $V_{in} = 1.5\text{ V}$) | I_{OUT} | 6.3 0.011 0.525 | 11 0.04 0.6 | – – – | mA |
| C_D Delay Pin Threshold Voltage (Pin 5) ($V_{in} = 2.2\text{ V}$) | V_{TCD} | 1.10 | 1.49 | 1.87 | V |
| Delay Capacitor Pin Sink Current (Pin 5) ($V_{in} = 0.7\text{ V}$, $V_{CD} = 0.1\text{ V}$) ($V_{in} = 1.5\text{ V}$, $V_{CD} = 0.5\text{ V}$) | I_{CD} | 2.0 200 | 120 1600 | – – | μA |
| Delay Pullup Resistance (Pin 5) | R_D | 0.5 | 1.0 | 2.0 | $\text{M}\Omega$ |
| NCP302/3– 2.7 | | | | | |
| Detector Threshold (Pin 2, V_{in} Decreasing) | V_{DET-} | 2.646 | 2.700 | 2.754 | V |
| Detector Threshold Hysteresis (Pin 2, V_{in} Increasing) | V_{HYS} | 0.081 | 0.135 | 0.189 | V |
| Supply Current (Pin 2) ($V_{in} = 2.6\text{ V}$) ($V_{in} = 4.7\text{ V}$) | I_{in} | – – | 0.26 0.46 | 0.8 1.3 | μA |
| Maximum Operating Voltage (Pin 2) | $V_{in(max)}$ | – | – | 10 | V |
| Minimum Operating Voltage (Pin 2) ($T_A = -40^\circ\text{C}$ to 85°C) | $V_{in(min)}$ | – – | 0.55 0.65 | 0.70 0.80 | V |
| Reset Output Current (Pin 1, Active Low 'L' Suffix Devices) Nch Sink Current, NCP302, NCP303 ($V_{OUT} = 0.05\text{ V}$, $V_{in} = 0.70\text{ V}$) ($V_{OUT} = 0.50\text{ V}$, $V_{in} = 1.5\text{ V}$) Pch Source Current, NCP302 ($V_{OUT} = 2.4\text{ V}$, $V_{in} = 4.5\text{ V}$) | I_{OUT} | 0.01 1.0 1.0 | 0.05 2.0 6.0 | – – – | mA |

NCP302, NCP303

ELECTRICAL CHARACTERISTICS (continued) (For all values $T_A = 25^\circ\text{C}$, unless otherwise noted.)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|--|-----------|-----------------------|-------------------|-------------|------------------|
| NCP302/3– 2.7 | | | | | |
| Reset Output Current (Pin 1, Active High 'H' Suffix Devices) Nch Sink Current, NCP302, NCP303 ($V_{OUT} = 0.5\text{ V}$, $V_{in} = 5.0\text{ V}$) Pch Source Current, NCP302 ($V_{OUT} = 0.4\text{ V}$, $V_{in} = 0.7\text{ V}$) ($V_{OUT} = \text{GND}$, $V_{in} = 1.5\text{ V}$) | I_{OUT} | 6.3 0.011 0.525 | 11 0.04 0.6 | – – – | mA |
| C_D Delay Pin Threshold Voltage (Pin 5) ($V_{in} = 2.97\text{ V}$) | V_{TCD} | 1.49 | 2.01 | 2.53 | V |
| Delay Capacitor Pin Sink Current (Pin 5) ($V_{in} = 0.7\text{ V}$, $V_{CD} = 0.1\text{ V}$) ($V_{in} = 1.5\text{ V}$, $V_{CD} = 0.5\text{ V}$) | I_{CD} | 2.0 200 | 120 1600 | – – | μA |
| Delay Pullup Resistance (Pin 5) | R_D | 0.5 | 1.0 | 2.0 | $\text{M}\Omega$ |

NCP302/3 – 3.0

| | | | | | |
|--|---------------|-----------------------|--------------------|--------------|------------------|
| Detector Threshold (Pin 2, V_{in} Decreasing) | V_{DET-} | 2.94 | 3.00 | 3.06 | V |
| Detector Threshold Hysteresis (Pin 2, V_{in} Increasing) | V_{HYS} | 0.09 | 0.15 | 0.21 | V |
| Supply Current (Pin 2) ($V_{in} = 2.87\text{ V}$) ($V_{in} = 5.0\text{ V}$) | I_{in} | – – | 0.27 0.47 | 0.9 1.3 | μA |
| Maximum Operating Voltage (Pin 2) | $V_{in(max)}$ | – | – | 10 | V |
| Minimum Operating Voltage (Pin 2) ($T_A = -40^\circ\text{C}$ to 85°C) | $V_{in(min)}$ | – – | 0.55 0.65 | 0.70 0.80 | V |
| Reset Output Current (Pin 1, Active Low 'L' Suffix Devices) Nch Sink Current, NCP302, NCP303 ($V_{OUT} = 0.05\text{ V}$, $V_{in} = 0.70\text{ V}$) ($V_{OUT} = 0.50\text{ V}$, $V_{in} = 1.5\text{ V}$) Pch Source Current, NCP302 ($V_{OUT} = 2.4\text{ V}$, $V_{in} = 4.5\text{ V}$) | I_{OUT} | 0.01 1.0 1.0 | 0.05 2.0 6.0 | – – – | mA |
| Reset Output Current (Pin 1, Active High 'H' Suffix Devices) Nch Sink Current, NCP302, NCP303 ($V_{OUT} = 0.5\text{ V}$, $V_{in} = 5.0\text{ V}$) Pch Source Current, NCP302 ($V_{OUT} = 0.4\text{ V}$, $V_{in} = 0.7\text{ V}$) ($V_{OUT} = \text{GND}$, $V_{in} = 1.5\text{ V}$) | I_{OUT} | 6.3 0.011 0.525 | 11 0.04 0.6 | – – – | mA |
| C_D Delay Pin Threshold Voltage (Pin 5) ($V_{in} = 3.3\text{ V}$) | V_{TCD} | 1.65 | 2.23 | 2.81 | V |
| Delay Capacitor Pin Sink Current (Pin 5) ($V_{in} = 0.7\text{ V}$, $V_{CD} = 0.1\text{ V}$) ($V_{in} = 1.5\text{ V}$, $V_{CD} = 0.5\text{ V}$) | I_{CD} | 2.0 200 | 120 1600 | – – | μA |
| Delay Pullup Resistance (Pin 5) | R_D | 0.5 | 1.0 | 2.0 | $\text{M}\Omega$ |

NCP302/3 – 4.5

| | | | | | |
|--|---------------|--------|--------------|--------------|---------------|
| Detector Threshold (Pin 2, V_{in} Decreasing) | V_{DET-} | 4.410 | 4.500 | 4.590 | V |
| Detector Threshold Hysteresis (Pin 2, V_{in} Increasing) | V_{HYS} | 0.135 | 0.225 | 0.315 | V |
| Supply Current (Pin 2) ($V_{in} = 4.34\text{ V}$) ($V_{in} = 6.5\text{ V}$) | I_{in} | – – | 0.33 0.52 | 1.0 1.4 | μA |
| Maximum Operating Voltage (Pin 2) | $V_{in(max)}$ | – | – | 10 | V |
| Minimum Operating Voltage (Pin 2) ($T_A = -40^\circ\text{C}$ to 85°C) | $V_{in(min)}$ | – – | 0.55 0.65 | 0.70 0.80 | V |

NCP302, NCP303


ELECTRICAL CHARACTERISTICS (continued) (For all values $T_A = 25^\circ\text{C}$, unless otherwise noted.)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|--|-----------|-----------------------|---------------------|-------------|------------------|
| NCP302/3 – 4.5 | | | | | |
| Reset Output Current (Pin 1, Active Low 'L' Suffix Devices) Nch Sink Current, NCP302, NCP303 ($V_{OUT} = 0.05\text{V}$, $V_{in} = 0.70\text{V}$) ($V_{OUT} = 0.50\text{V}$, $V_{in} = 1.5\text{V}$) Pch Source Current, NCP302 ($V_{OUT} = 5.9\text{V}$, $V_{in} = 8.0\text{V}$) | I_{OUT} | 0.01 1.0 1.5 | 0.05 2.0 10.5 | – – – | mA |
| Reset Output Current (Pin 1, Active High 'H' Suffix Devices) Nch Sink Current, NCP302, NCP303 ($V_{OUT} = 0.5\text{V}$, $V_{in} = 5.0\text{V}$) Pch Source Current, NCP302 ($V_{OUT} = 0.4\text{V}$, $V_{in} = 0.7\text{V}$) ($V_{OUT} = \text{GND}$, $V_{in} = 1.5\text{V}$) | I_{OUT} | 6.3 0.011 0.525 | 11 0.04 0.6 | – – – | mA |
| C_D Delay Pin Threshold Voltage (Pin 5) ($V_{in} = 4.95\text{V}$) | V_{TCD} | 2.25 | 3.04 | 3.83 | V |
| Delay Capacitor Pin Sink Current (Pin 5) ($V_{in} = 0.7\text{V}$, $V_{CD} = 0.1\text{V}$) ($V_{in} = 1.5\text{V}$, $V_{CD} = 0.5\text{V}$) | I_{CD} | 2.0 200 | 120 1600 | – – | μA |
| Delay Pullup Resistance (Pin 5) | R_D | 0.5 | 1.0 | 2.0 | $\text{M}\Omega$ |

NCP302/3 – 4.7

| | | | | | |
|--|---------------|-----------------------|---------------------|--------------|------------------|
| Detector Threshold (Pin 2, V_{in} Decreasing) | V_{DET-} | 4.606 | 4.70 | 4.794 | V |
| Detector Threshold Hysteresis (Pin 2, V_{in} Increasing) | V_{HYS} | 0.141 | 0.235 | 0.329 | V |
| Supply Current (Pin 2) ($V_{in} = 4.54\text{V}$) ($V_{in} = 6.7\text{V}$) | I_{in} | – – | 0.34 0.53 | 1.0 1.4 | μA |
| Maximum Operating Voltage (Pin 2) | $V_{in(max)}$ | – | – | 10 | V |
| Minimum Operating Voltage (Pin 2) ($T_A = -40^\circ\text{C}$ to 85°C) | $V_{in(min)}$ | – – | 0.55 0.65 | 0.70 0.80 | V |
| Reset Output Current (Pin 1, Active Low 'L' Suffix Devices) Nch Sink Current, NCP302, NCP303 ($V_{OUT} = 0.05\text{V}$, $V_{in} = 0.70\text{V}$) ($V_{OUT} = 0.50\text{V}$, $V_{in} = 1.5\text{V}$) Pch Source Current, NCP302 ($V_{OUT} = 5.9\text{V}$, $V_{in} = 8.0\text{V}$) | I_{OUT} | 0.01 1.0 1.5 | 0.05 2.0 10.5 | – – – | mA |
| Reset Output Current (Pin 1, Active High 'H' Suffix Devices) Nch Sink Current, NCP302, NCP303 ($V_{OUT} = 0.5\text{V}$, $V_{in} = 5.0\text{V}$) Pch Source Current, NCP302 ($V_{OUT} = 0.4\text{V}$, $V_{in} = 0.7\text{V}$) ($V_{OUT} = \text{GND}$, $V_{in} = 1.5\text{V}$) | I_{OUT} | 6.3 0.011 0.525 | 11 0.04 0.6 | – – – | mA |
| C_D Delay Pin Threshold Voltage (Pin 5) ($V_{in} = 5.17\text{V}$) | V_{TCD} | 2.59 | 3.49 | 4.40 | V |
| Delay Capacitor Pin Sink Current (Pin 5) ($V_{in} = 0.7\text{V}$, $V_{CD} = 0.1\text{V}$) ($V_{in} = 1.5\text{V}$, $V_{CD} = 0.5\text{V}$) | I_{CD} | 2.0 200 | 120 1600 | – – | μA |
| Delay Pullup Resistance (Pin 5) | R_D | 0.5 | 1.0 | 2.0 | $\text{M}\Omega$ |

NCP302, NCP303

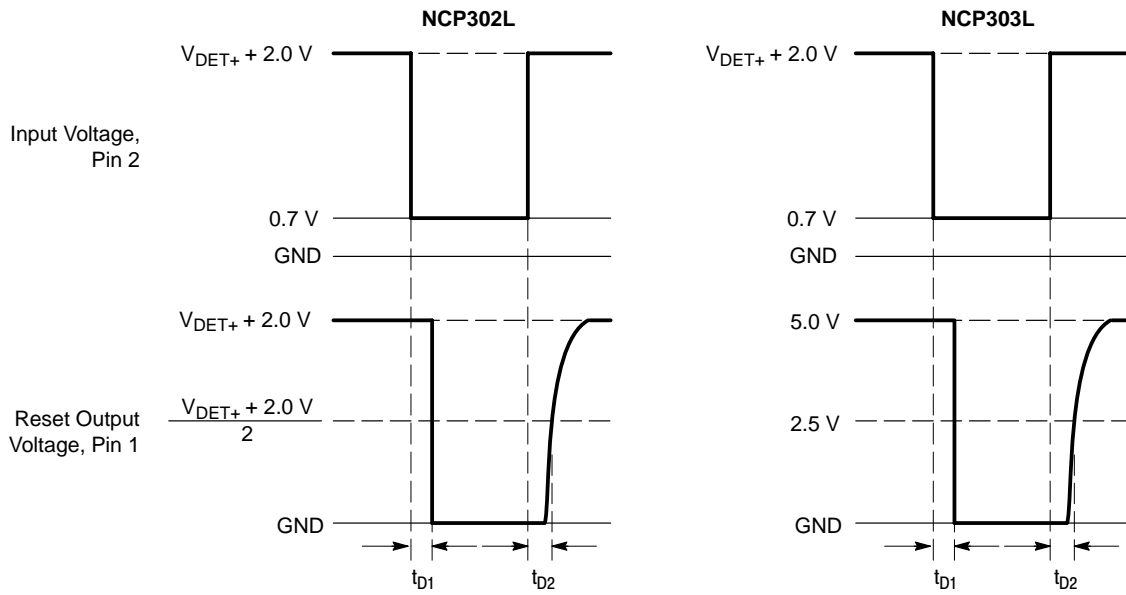

NCP302 and NCP303 series are measured with a 10 pF capacitive load. NCP303 has an additional 470 k pullup resistor connected from the reset output to +5.0 V. The reset output voltage waveforms are shown for the active low 'L' devices. Output time delay t_{D1} and t_{D2} are dependent upon the delay capacitance. Refer to Figures 12, 13, and 14. The upper detector threshold, V_{DET+} is the sum of the lower detector threshold, V_{DET-} plus the input hysteresis, V_{HYS} .

Figure 2. Measurement Conditions for t_{D1} and t_{D2}

NCP302, NCP303

Table 1. ELECTRICAL CHARACTERISTIC TABLE FOR 0.9 – 4.9 V

| NCP302 Series | Detector Threshold | | | Detector Threshold Hysteresis | | | Supply Current | | Nch Sink Current | | Pch Source Current |
|---------------|-----------------------|-----|-------|-------------------------------|-------|-------|-------------------------------------|-------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| | | | | | | | V _{in} Low | V _{in} High | V _{in} Low | V _{in} High | |
| Part Number | V _{DET-} (V) | | | V _{HYS} (V) | | | I _{in} (μA) ⁽¹⁾ | I _{in} (μA) ⁽²⁾ | I _{OUT} (mA) ⁽³⁾ | I _{OUT} (mA) ⁽⁴⁾ | I _{OUT} (mA) ⁽⁵⁾ |
| | Min | Typ | Max | Min | Typ | Max | Typ | Typ | Typ | Typ | Typ |
| NCP302LSN09T1 | 0.882 | 0.9 | 0.918 | 0.027 | 0.045 | 0.063 | 0.3 | 0.5 | 0.05 | 0.5 | 2.0 |
| NCP302LSN10T1 | 0.980 | 1.0 | 1.020 | 0.030 | 0.050 | 0.070 | | | | 1.0 | |
| NCP302LSN11T1 | 1.078 | 1.1 | 1.122 | 0.033 | 0.055 | 0.077 | | | | | |
| NCP302LSN12T1 | 1.176 | 1.2 | 1.224 | 0.036 | 0.060 | 0.084 | | | | | |
| NCP302LSN13T1 | 1.274 | 1.3 | 1.326 | 0.039 | 0.065 | 0.091 | | | | | |
| NCP302LSN14T1 | 1.372 | 1.4 | 1.428 | 0.042 | 0.070 | 0.098 | | | | | |
| NCP302LSN15T1 | 1.470 | 1.5 | 1.530 | 0.045 | 0.075 | 0.105 | | | | | |
| NCP302LSN16T1 | 1.568 | 1.6 | 1.632 | 0.048 | 0.080 | 0.112 | | | | | |
| NCP302LSN17T1 | 1.666 | 1.7 | 1.734 | 0.051 | 0.085 | 0.119 | | | | | |
| NCP302LSN18T1 | 1.764 | 1.8 | 1.836 | 0.054 | 0.090 | 0.126 | | | | | |
| NCP302LSN19T1 | 1.862 | 1.9 | 1.938 | 0.057 | 0.095 | 0.133 | | | | | |
| NCP302LSN20T1 | 1.960 | 2.0 | 2.040 | 0.060 | 0.100 | 0.140 | | | | | |
| NCP302LSN21T1 | 2.058 | 2.1 | 2.142 | 0.063 | 0.105 | 0.147 | | | | | |
| NCP302LSN22T1 | 2.156 | 2.2 | 2.244 | 0.066 | 0.110 | 0.154 | | | | | |
| NCP302LSN23T1 | 2.254 | 2.3 | 2.346 | 0.069 | 0.115 | 0.161 | | | | | |
| NCP302LSN24T1 | 2.352 | 2.4 | 2.448 | 0.072 | 0.120 | 0.168 | | | | | |
| NCP302LSN25T1 | 2.450 | 2.5 | 2.550 | 0.075 | 0.125 | 0.175 | | | | | |
| NCP302LSN26T1 | 2.548 | 2.6 | 2.652 | 0.078 | 0.130 | 0.182 | | | | | |
| NCP302LSN27T1 | 2.646 | 2.7 | 2.754 | 0.081 | 0.135 | 0.189 | | | | | |
| NCP302LSN28T1 | 2.744 | 2.8 | 2.856 | 0.084 | 0.140 | 0.196 | | | | | |
| NCP302LSN29T1 | 2.842 | 2.9 | 2.958 | 0.087 | 0.145 | 0.203 | | | | | |
| NCP302LSN30T1 | 2.940 | 3.0 | 3.060 | 0.090 | 0.150 | 0.210 | | | | | |
| NCP302LSN31T1 | 3.038 | 3.1 | 3.162 | 0.093 | 0.155 | 0.217 | | | | | |
| NCP302LSN32T1 | 3.136 | 3.2 | 3.264 | 0.096 | 0.160 | 0.224 | | | | | |
| NCP302LSN33T1 | 3.234 | 3.3 | 3.366 | 0.099 | 0.165 | 0.231 | | | | | |
| NCP302LSN34T1 | 3.332 | 3.4 | 3.468 | 0.102 | 0.170 | 0.238 | | | | | |
| NCP302LSN35T1 | 3.430 | 3.5 | 3.570 | 0.105 | 0.175 | 0.245 | | | | | |
| NCP302LSN36T1 | 3.528 | 3.6 | 3.672 | 0.108 | 0.180 | 0.252 | | | | | |
| NCP302LSN37T1 | 3.626 | 3.7 | 3.774 | 0.111 | 0.185 | 0.259 | | | | | |
| NCP302LSN38T1 | 3.724 | 3.8 | 3.876 | 0.114 | 0.190 | 0.266 | | | | | |
| NCP302LSN39T1 | 3.822 | 3.9 | 3.978 | 0.117 | 0.195 | 0.273 | | | | | |
| NCP302LSN40T1 | 3.920 | 4.0 | 4.080 | 0.120 | 0.200 | 0.280 | 0.4 | 0.6 | | | 3.0 |
| NCP302LSN41T1 | 4.018 | 4.1 | 4.182 | 0.123 | 0.205 | 0.287 | | | | | |
| NCP302LSN42T1 | 4.116 | 4.2 | 4.284 | 0.126 | 0.210 | 0.294 | | | | | |
| NCP302LSN43T1 | 4.214 | 4.3 | 4.386 | 0.129 | 0.215 | 0.301 | | | | | |
| NCP302LSN44T1 | 4.312 | 4.4 | 4.488 | 0.132 | 0.220 | 0.308 | | | | | |
| NCP302LSN45T1 | 4.410 | 4.5 | 4.590 | 0.135 | 0.225 | 0.315 | | | | | |
| NCP302LSN46T1 | 4.508 | 4.6 | 4.692 | 0.138 | 0.230 | 0.322 | | | | | |
| NCP302LSN47T1 | 4.606 | 4.7 | 4.794 | 0.141 | 0.235 | 0.329 | | | | | |
| NCP302LSN48T1 | 4.704 | 4.8 | 4.896 | 0.144 | 0.240 | 0.336 | | | | | |
| NCP302LSN49T1 | 4.802 | 4.9 | 4.998 | 0.147 | 0.245 | 0.343 | | | | | |

3. Condition 1: 0.9 — 2.9 V, V_{in} = V_{DET-} - 0.10 V; 3.0 — 3.9 V, V_{in} = V_{DET-} - 0.13 V; 4.0 — 4.9 V, V_{in} = V_{DET-} - 0.16 V

4. Condition 2: 0.9 — 4.9 V, V_{in} = V_{DET-} + 2.0 V

5. Condition 3: 0.9 — 4.9 V, V_{in} = 0.7 V, V_{OUT} = 0.05 V, Active Low 'L' Suffix Devices

6. Condition 4: 0.9 — 1.0 V, V_{in} = 0.85 V, V_{OUT} = 0.5 V; 1.1 — 1.5 V, V_{in} = 1.0 V, V_{OUT} = 0.5 V; 1.6 — 4.9 V, V_{in} = 1.5 V, V_{OUT} = 0.5 V, Active Low 'L' Suffix Devices

7. Condition 5: 0.9 — 3.9 V, V_{in} = 4.5 V, V_{OUT} = 2.4 V; 4.0 — 4.9 V, V_{in} = 8.0 V, V_{OUT} = 5.9 V, Active Low 'L' Suffix Devices

NCP302, NCP303

Table 2. ELECTRICAL CHARACTERISTIC TABLE FOR 0.9 – 4.9 V

| NCP302 Series | Detector Threshold | | | Detector Threshold Hysteresis | | | Supply Current | | Nch Sink Current | Pch Source Current | |
|---------------|-----------------------|-----|-------|-------------------------------|-------|-------|-------------------------------------|-------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| | | | | | | | V _{in} Low | V _{in} High | | V _{in} Low | V _{in} High |
| Part Number | V _{DET-} (V) | | | V _{HYS} (V) | | | I _{in} (μA) ⁽¹⁾ | I _{in} (μA) ⁽²⁾ | I _{OUT} (mA) ⁽³⁾ | I _{OUT} (mA) ⁽⁴⁾ | I _{OUT} (mA) ⁽⁵⁾ |
| | Min | Typ | Max | Min | Typ | Max | Typ | Typ | Typ | Typ | Typ |
| NCP302HSN09T1 | 0.882 | 0.9 | 0.918 | 0.027 | 0.045 | 0.063 | 0.3 | 0.5 | 2.5 | 0.04 | 0.08 |
| NCP302HSN10T1 | 0.980 | 1.0 | 1.020 | 0.030 | 0.050 | 0.070 | | | | | 0.18 |
| NCP302HSN11T1 | 1.078 | 1.1 | 1.122 | 0.033 | 0.055 | 0.077 | | | | | |
| NCP302HSN12T1 | 1.176 | 1.2 | 1.224 | 0.036 | 0.060 | 0.084 | | | | | |
| NCP302HSN13T1 | 1.274 | 1.3 | 1.326 | 0.039 | 0.065 | 0.091 | | | | | |
| NCP302HSN14T1 | 1.372 | 1.4 | 1.428 | 0.042 | 0.070 | 0.098 | | | | | |
| NCP302HSN15T1 | 1.470 | 1.5 | 1.530 | 0.045 | 0.075 | 0.105 | | | 11 | | 0.6 |
| NCP302HSN16T1 | 1.568 | 1.6 | 1.632 | 0.048 | 0.080 | 0.112 | | | | | |
| NCP302HSN17T1 | 1.666 | 1.7 | 1.734 | 0.051 | 0.085 | 0.119 | | | | | |
| NCP302HSN18T1 | 1.764 | 1.8 | 1.836 | 0.054 | 0.090 | 0.126 | | | | | |
| NCP302HSN19T1 | 1.862 | 1.9 | 1.938 | 0.057 | 0.095 | 0.133 | | | | | |
| NCP302HSN20T1 | 1.960 | 2.0 | 2.040 | 0.060 | 0.100 | 0.140 | | | | | |
| NCP302HSN21T1 | 2.058 | 2.1 | 2.142 | 0.063 | 0.105 | 0.147 | | | | | |
| NCP302HSN22T1 | 2.156 | 2.2 | 2.244 | 0.066 | 0.110 | 0.154 | | | | | |
| NCP302HSN23T1 | 2.254 | 2.3 | 2.346 | 0.069 | 0.115 | 0.161 | | | | | |
| NCP302HSN24T1 | 2.352 | 2.4 | 2.448 | 0.072 | 0.120 | 0.168 | | | | | |
| NCP302HSN25T1 | 2.450 | 2.5 | 2.550 | 0.075 | 0.125 | 0.175 | | | | | |
| NCP302HSN26T1 | 2.548 | 2.6 | 2.652 | 0.078 | 0.130 | 0.182 | | | | | |
| NCP302HSN27T1 | 2.646 | 2.7 | 2.754 | 0.081 | 0.135 | 0.189 | | | | | |
| NCP302HSN28T1 | 2.744 | 2.8 | 2.856 | 0.084 | 0.140 | 0.196 | | | | | |
| NCP302HSN29T1 | 2.842 | 2.9 | 2.958 | 0.087 | 0.145 | 0.203 | | | | | |
| NCP302HSN30T1 | 2.940 | 3.0 | 3.060 | 0.090 | 0.150 | 0.210 | | | | | |
| NCP302HSN31T1 | 3.038 | 3.1 | 3.162 | 0.093 | 0.155 | 0.217 | | | | | |
| NCP302HSN32T1 | 3.136 | 3.2 | 3.264 | 0.096 | 0.160 | 0.224 | | | | | |
| NCP302HSN33T1 | 3.234 | 3.3 | 3.366 | 0.099 | 0.165 | 0.231 | | | | | |
| NCP302HSN34T1 | 3.332 | 3.4 | 3.468 | 0.102 | 0.170 | 0.238 | | | | | |
| NCP302HSN35T1 | 3.430 | 3.5 | 3.570 | 0.105 | 0.175 | 0.245 | | | | | |
| NCP302HSN36T1 | 3.528 | 3.6 | 3.672 | 0.108 | 0.180 | 0.252 | | | | | |
| NCP302HSN37T1 | 3.626 | 3.7 | 3.774 | 0.111 | 0.185 | 0.259 | | | | | |
| NCP302HSN38T1 | 3.724 | 3.8 | 3.876 | 0.114 | 0.190 | 0.266 | | | | | |
| NCP302HSN39T1 | 3.822 | 3.9 | 3.978 | 0.117 | 0.195 | 0.273 | | | | | |
| NCP302HSN40T1 | 3.920 | 4.0 | 4.080 | 0.120 | 0.200 | 0.280 | 0.4 | 0.6 | | | |
| NCP302HSN41T1 | 4.018 | 4.1 | 4.182 | 0.123 | 0.205 | 0.287 | | | | | |
| NCP302HSN42T1 | 4.116 | 4.2 | 4.284 | 0.126 | 0.210 | 0.294 | | | | | |
| NCP302HSN43T1 | 4.214 | 4.3 | 4.386 | 0.129 | 0.215 | 0.301 | | | | | |
| NCP302HSN44T1 | 4.312 | 4.4 | 4.488 | 0.132 | 0.220 | 0.308 | | | | | |
| NCP302HSN45T1 | 4.410 | 4.5 | 4.590 | 0.135 | 0.225 | 0.315 | | | | | |
| NCP302HSN46T1 | 4.508 | 4.6 | 4.692 | 0.138 | 0.230 | 0.322 | | | | | |
| NCP302HSN47T1 | 4.606 | 4.7 | 4.794 | 0.141 | 0.235 | 0.329 | | | | | |
| NCP302HSN48T1 | 4.704 | 4.8 | 4.896 | 0.144 | 0.240 | 0.336 | | | | | |
| NCP302HSN49T1 | 4.802 | 4.9 | 4.998 | 0.147 | 0.245 | 0.343 | | | | | |

8. Condition 1: 0.9 — 2.9 V, V_{in} = V_{DET-} - 0.10 V; 3.0 — 3.9 V, V_{in} = V_{DET-} - 0.13 V; 4.0 — 4.9 V, V_{in} = V_{DET-} - 0.16 V

9. Condition 2: 0.9 — 4.9 V, V_{in} = V_{DET-} + 2.0 V

10. Condition 3: 0.9 — 1.4 V, V_{in} = 1.5 V, V_{OUT} = 0.5 V; 1.5 — 4.9 V, V_{in} = 5.0 V, V_{OUT} = 0.5 V, Active High 'H' Suffix Devices

11. Condition 4: 0.9 — 4.9 V, V_{in} = 0.7 V, V_{OUT} = 0.4 V, Active High 'H' Suffix Devices

12. Condition 5: 0.9 — 1.0 V, V_{in} = 0.8 V, V_{OUT} = GND; 1.1 — 1.5 V, V_{in} = 1.0 V, V_{OUT} = GND; 1.6 — 4.9 V, V_{in} = 1.5 V, V_{OUT} = GND,

Active High 'H' Suffix Devices

NCP302, NCP303

Table 3. ELECTRICAL CHARACTERISTIC TABLE FOR 0.9 – 4.9 V

| NCP303 Series | Detector Threshold | | | Detector Threshold Hysteresis | | | Supply Current | | Nch Sink Current | |
|---------------|-----------------------|-----|-------|-------------------------------|-------|-------|-------------------------------------|-------------------------------------|--------------------------------------|--------------------------------------|
| | | | | | | | V _{in} Low | V _{in} High | V _{in} Low | V _{in} High |
| Part Number | V _{DET-} (V) | | | V _{HYS} (V) | | | I _{in} (μA) ⁽¹⁾ | I _{in} (μA) ⁽²⁾ | I _{OUT} (mA) ⁽³⁾ | I _{OUT} (mA) ⁽⁴⁾ |
| | Min | Typ | Max | Min | Typ | Max | Typ | Typ | Typ | Typ |
| NCP303LSN09T1 | 0.882 | 0.9 | 0.918 | 0.027 | 0.045 | 0.063 | 0.3 | 0.5 | 0.05 | 0.5 |
| NCP303LSN10T1 | 0.980 | 1.0 | 1.020 | 0.030 | 0.050 | 0.070 | | | | 1.0 |
| NCP303LSN11T1 | 1.078 | 1.1 | 1.122 | 0.033 | 0.055 | 0.077 | | | | |
| NCP303LSN12T1 | 1.176 | 1.2 | 1.224 | 0.036 | 0.060 | 0.084 | | | | |
| NCP303LSN13T1 | 1.274 | 1.3 | 1.326 | 0.039 | 0.065 | 0.091 | | | | |
| NCP303LSN14T1 | 1.372 | 1.4 | 1.428 | 0.042 | 0.070 | 0.098 | | | | |
| NCP303LSN15T1 | 1.470 | 1.5 | 1.530 | 0.045 | 0.075 | 0.105 | | | | |
| NCP303LSN16T1 | 1.568 | 1.6 | 1.632 | 0.048 | 0.080 | 0.112 | | | | |
| NCP303LSN17T1 | 1.666 | 1.7 | 1.734 | 0.051 | 0.085 | 0.119 | | | | |
| NCP303LSN18T1 | 1.764 | 1.8 | 1.836 | 0.054 | 0.090 | 0.126 | | | | |
| NCP303LSN19T1 | 1.862 | 1.9 | 1.938 | 0.057 | 0.095 | 0.133 | | | | |
| NCP303LSN20T1 | 1.960 | 2.0 | 2.040 | 0.060 | 0.100 | 0.140 | | | | |
| NCP303LSN21T1 | 2.058 | 2.1 | 2.142 | 0.063 | 0.105 | 0.147 | | | | |
| NCP303LSN22T1 | 2.156 | 2.2 | 2.244 | 0.066 | 0.110 | 0.154 | | | | |
| NCP303LSN23T1 | 2.254 | 2.3 | 2.346 | 0.069 | 0.115 | 0.161 | | | | |
| NCP303LSN24T1 | 2.352 | 2.4 | 2.448 | 0.072 | 0.120 | 0.168 | | | | |
| NCP303LSN25T1 | 2.450 | 2.5 | 2.550 | 0.075 | 0.125 | 0.175 | | | | |
| NCP303LSN26T1 | 2.548 | 2.6 | 2.652 | 0.078 | 0.130 | 0.182 | | | | |
| NCP303LSN27T1 | 2.646 | 2.7 | 2.754 | 0.081 | 0.135 | 0.189 | | | | |
| NCP303LSN28T1 | 2.744 | 2.8 | 2.856 | 0.084 | 0.140 | 0.196 | | | | |
| NCP303LSN29T1 | 2.842 | 2.9 | 2.958 | 0.087 | 0.145 | 0.203 | | | | |
| NCP303LSN30T1 | 2.940 | 3.0 | 3.060 | 0.090 | 0.150 | 0.210 | | | | |
| NCP303LSN31T1 | 3.038 | 3.1 | 3.162 | 0.093 | 0.155 | 0.217 | | | | |
| NCP303LSN32T1 | 3.136 | 3.2 | 3.264 | 0.096 | 0.160 | 0.224 | | | | |
| NCP303LSN33T1 | 3.234 | 3.3 | 3.366 | 0.099 | 0.165 | 0.231 | | | | |
| NCP303LSN34T1 | 3.332 | 3.4 | 3.468 | 0.102 | 0.170 | 0.238 | | | | |
| NCP303LSN35T1 | 3.430 | 3.5 | 3.570 | 0.105 | 0.175 | 0.245 | | | | |
| NCP303LSN36T1 | 3.528 | 3.6 | 3.672 | 0.108 | 0.180 | 0.252 | | | | |
| NCP303LSN37T1 | 3.626 | 3.7 | 3.774 | 0.111 | 0.185 | 0.259 | | | | |
| NCP303LSN38T1 | 3.724 | 3.8 | 3.876 | 0.114 | 0.190 | 0.266 | | | | |
| NCP303LSN39T1 | 3.822 | 3.9 | 3.978 | 0.117 | 0.195 | 0.273 | | | | |
| NCP303LSN40T1 | 3.920 | 4.0 | 4.080 | 0.120 | 0.200 | 0.280 | 0.4 | 0.6 | | |
| NCP303LSN41T1 | 4.018 | 4.1 | 4.182 | 0.123 | 0.205 | 0.287 | | | | |
| NCP303LSN42T1 | 4.116 | 4.2 | 4.284 | 0.126 | 0.210 | 0.294 | | | | |
| NCP303LSN43T1 | 4.214 | 4.3 | 4.386 | 0.129 | 0.215 | 0.301 | | | | |
| NCP303LSN44T1 | 4.312 | 4.4 | 4.488 | 0.132 | 0.220 | 0.308 | | | | |
| NCP303LSN45T1 | 4.410 | 4.5 | 4.590 | 0.135 | 0.225 | 0.315 | | | | |
| NCP303LSN46T1 | 4.508 | 4.6 | 4.692 | 0.138 | 0.230 | 0.322 | | | | |
| NCP303LSN47T1 | 4.606 | 4.7 | 4.794 | 0.141 | 0.235 | 0.329 | | | | |
| NCP303LSN48T1 | 4.704 | 4.8 | 4.896 | 0.144 | 0.240 | 0.336 | | | | |
| NCP303LSN49T1 | 4.802 | 4.9 | 4.998 | 0.147 | 0.245 | 0.343 | | | | |

13. Condition 1: 0.9 — 2.9 V, V_{in} = V_{DET-} - 0.10 V; 3.0 — 3.9 V, V_{in} = V_{DET-} - 0.13 V; 4.0 — 4.9 V, V_{in} = V_{DET-} - 0.16 V

14. Condition 2: 0.9 — 4.9 V, V_{in} = V_{DET-} + 2.0 V

15. Condition 3: 0.9 — 4.9 V, V_{in} = 0.7 V, V_{OUT} = 0.05 V, Active Low 'L' Suffix Devices

16. Condition 4: 0.9 — 1.0 V, V_{in} = 0.85 V, V_{OUT} = 0.5 V; 1.1 — 1.5 V, V_{in} = 1.0 V, V_{OUT} = 0.5 V; 1.6 — 4.9 V, V_{in} = 1.5 V, V_{OUT} = 0.5 V, Active Low 'L' Suffix Devices

NCP302, NCP303

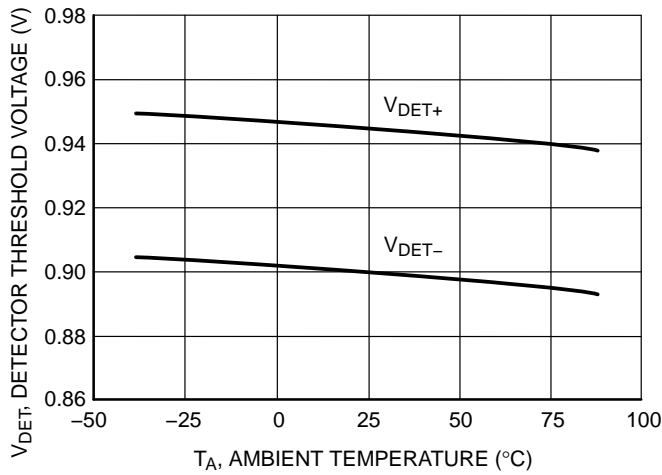


Figure 3. NCP302/3 Series 0.9 V
Detector Threshold Voltage vs. Temperature

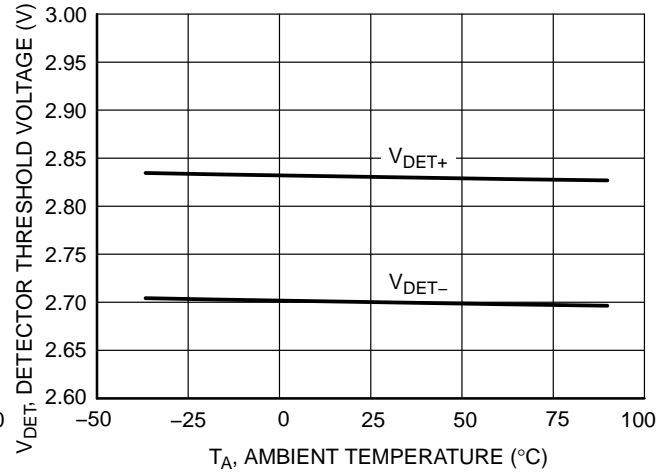


Figure 4. NCP302/3 Series 2.7 V
Detector Threshold Voltage vs. Temperature

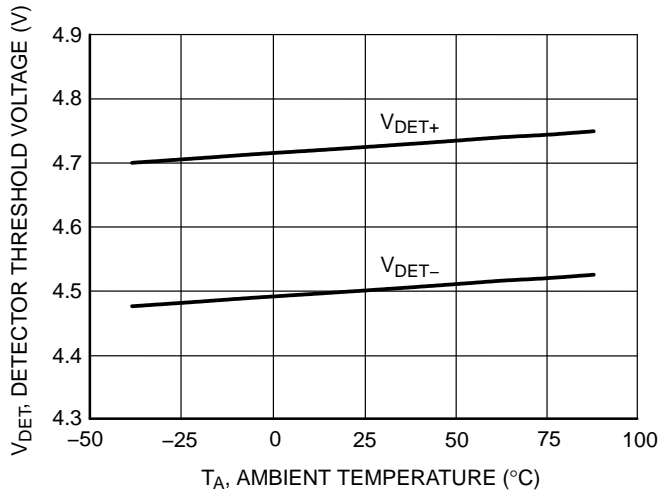


Figure 5. NCP302/3 Series 4.5 V
Detector Threshold Voltage vs. Temperature

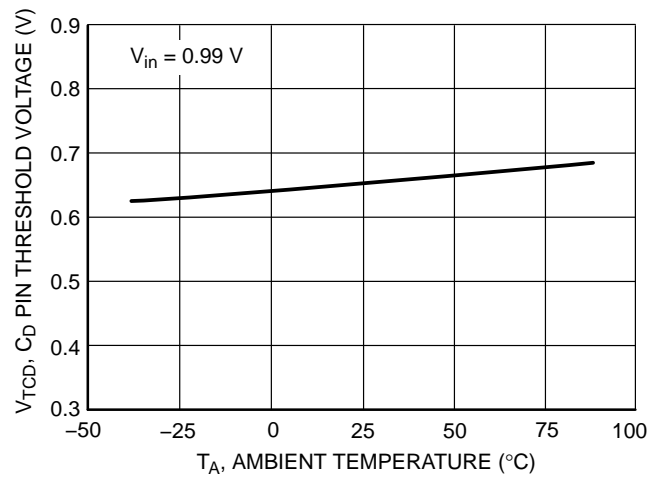


Figure 6. NCP302/3 Series 0.9 V
C_D Delay Pin Threshold Voltage vs. Temperature

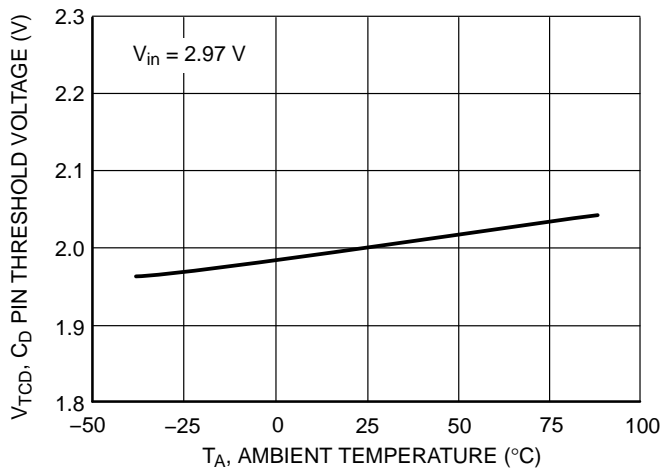


Figure 7. NCP302/3 Series 2.7 V
C_D Delay Pin Threshold Voltage vs. Temperature



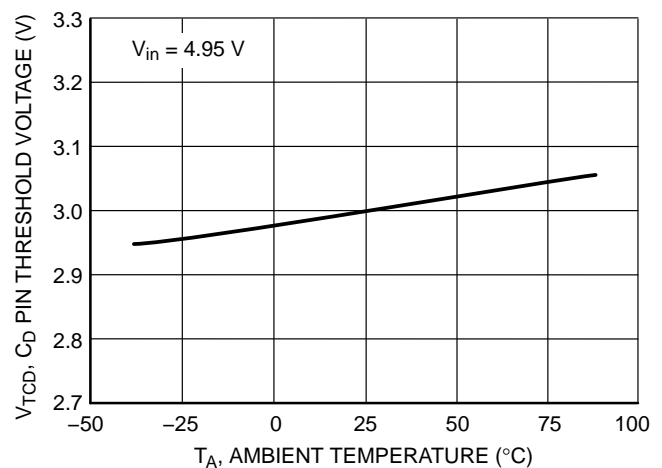


Figure 8. NCP302/3 Series 4.5 V
C_D Delay Pin Threshold Voltage vs. Temperature


NCP302, NCP303

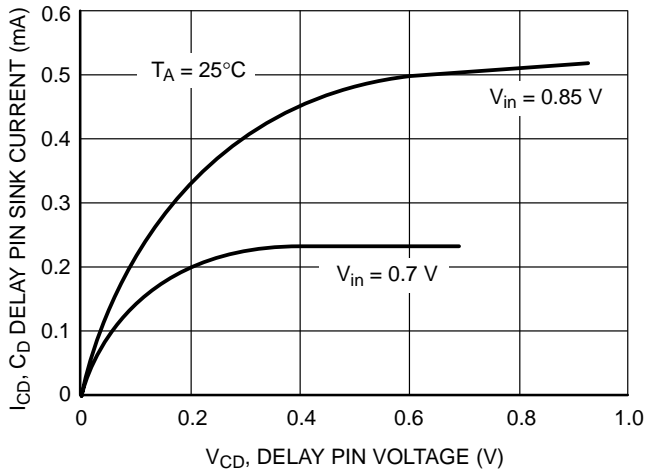


**Figure 9. NCP302/3 Series 0.9 V
C_D Delay Pin Sink Current vs. Voltage**

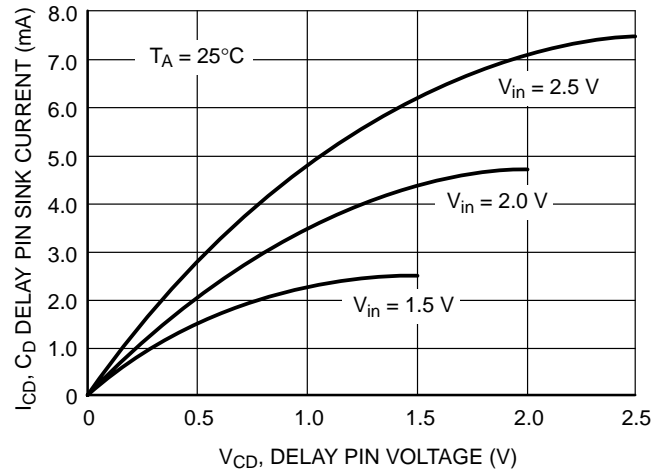


**Figure 10. NCP302/3 Series 2.7 V
C_D Delay Pin Sink Current vs. Voltage**

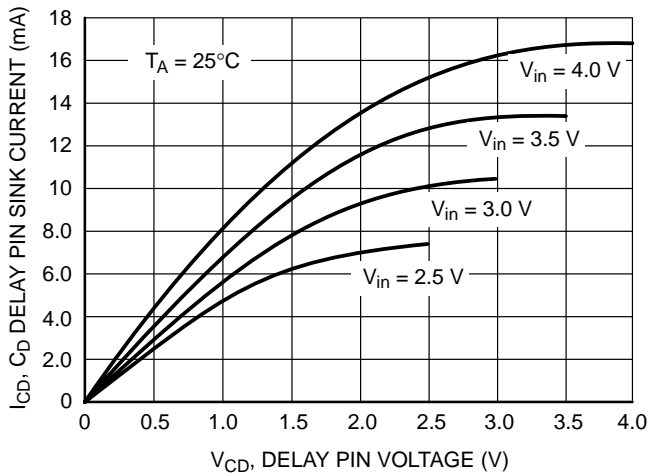


**Figure 11. NCP302/3 Series 4.5 V
C_D Delay Pin Sink Current vs. Voltage**

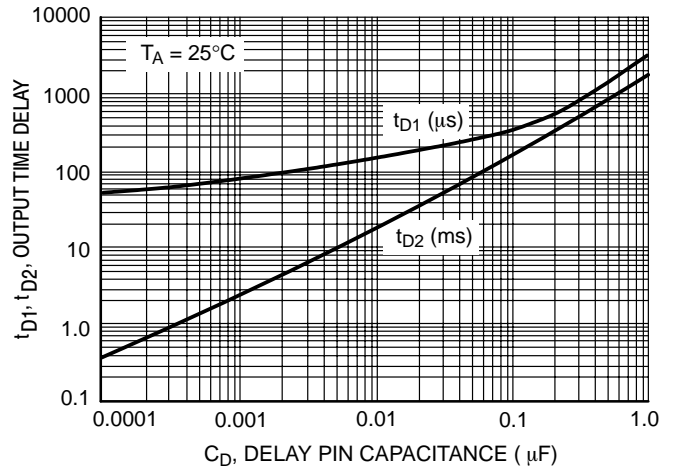

**Figure 12. NCP302/3 Series 0.9 V
Output Time Delay vs. Capacitance**

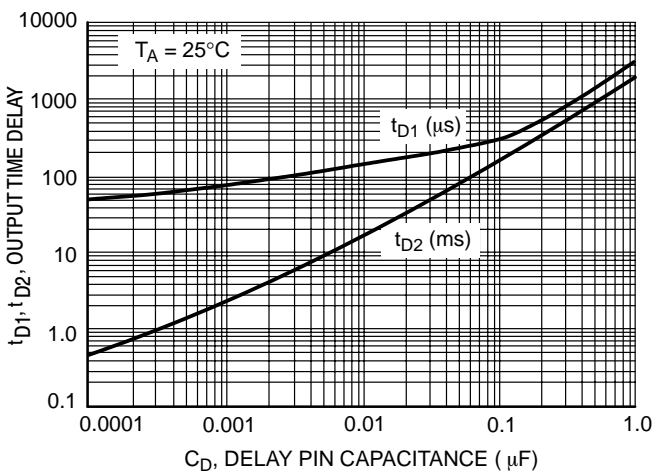

**Figure 13. NCP302/3 Series 2.7 V
Output Time Delay vs. Capacitance**

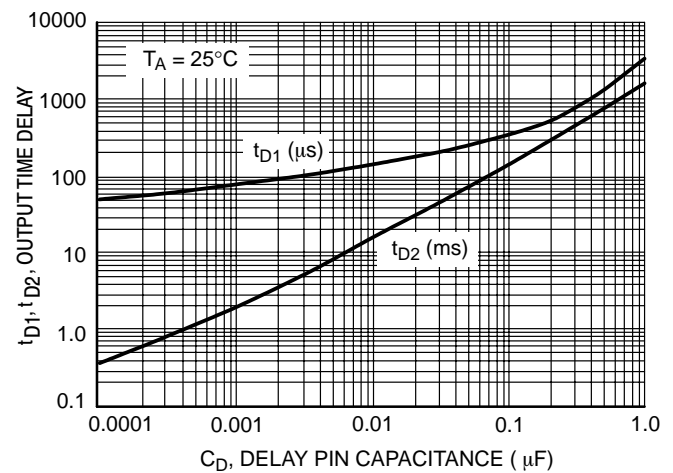

**Figure 14. NCP302/3 Series 4.5 V
Output Time Delay vs. Capacitance**

NCP302, NCP303

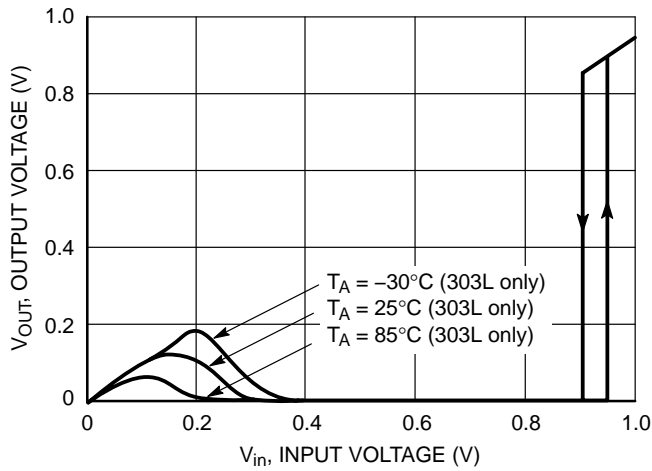


Figure 15. NCP302L/3L Series 0.9 V Reset Output Voltage vs. Input Voltage

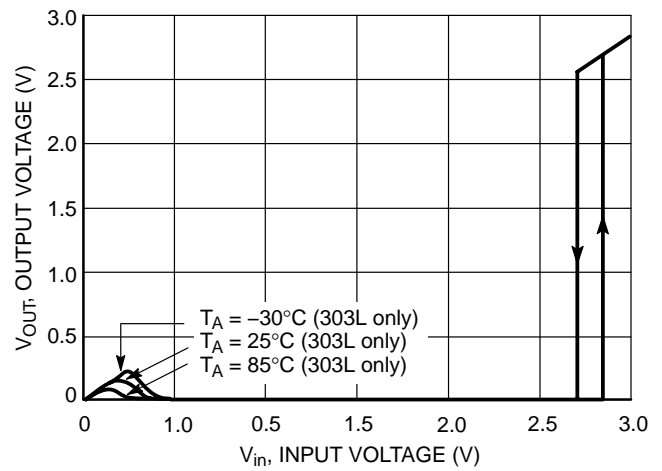


Figure 16. NCP302L/3L Series 2.7 V Reset Output Voltage vs. Input Voltage

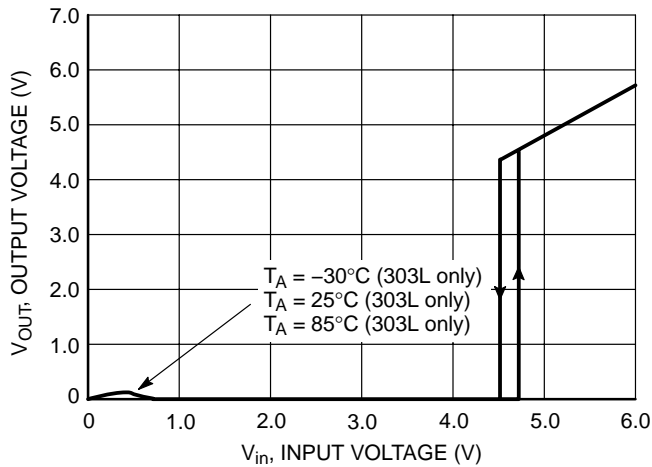


Figure 17. NCP302L/3L Series 4.5 V Reset Output Voltage vs. Input Voltage

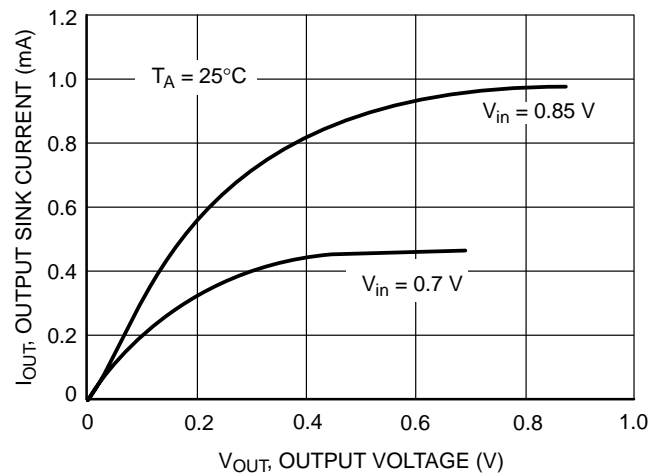


Figure 18. NCP302H/3L Series 0.9 V Reset Output Sink Current vs. Output Voltage

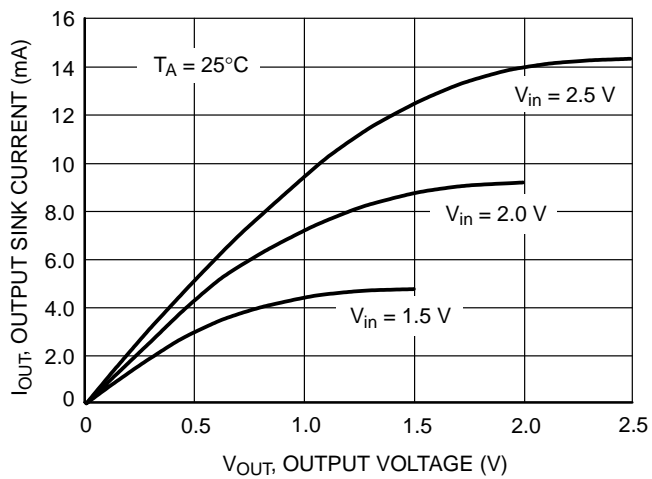


Figure 19. NCP302H/3L Series 2.7 V Reset Output Sink Current vs. Output Voltage

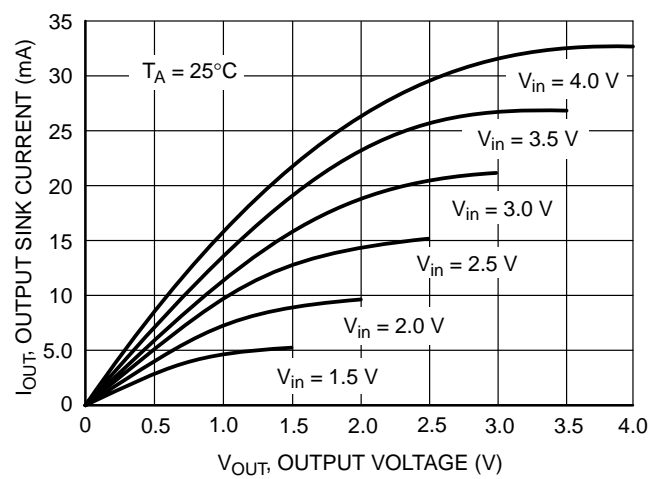


Figure 20. NCP302H/3L Series 4.5 V Reset Output Sink Current vs. Output Voltage

NCP302, NCP303

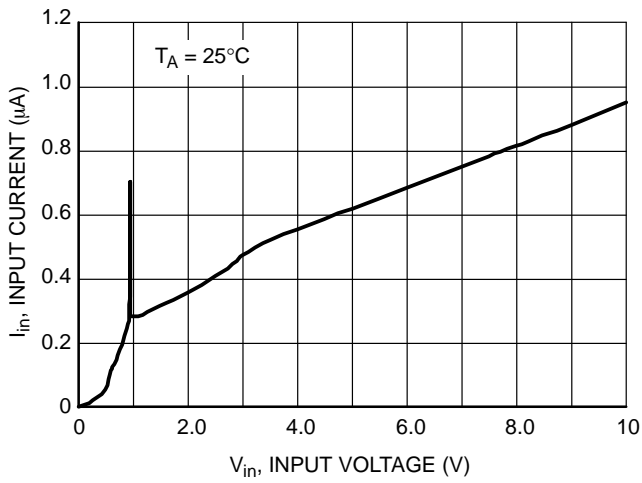


Figure 21. NCP302/3 Series 0.9 V Input Current vs. Input Voltage

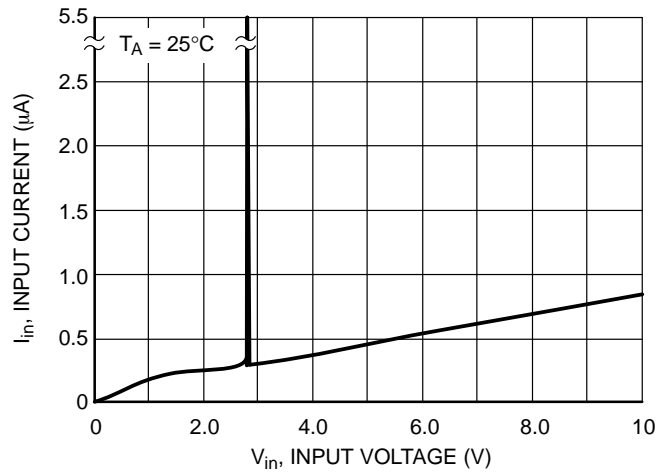


Figure 22. NCP302/3 Series 2.7 V Input Current vs. Input Voltage

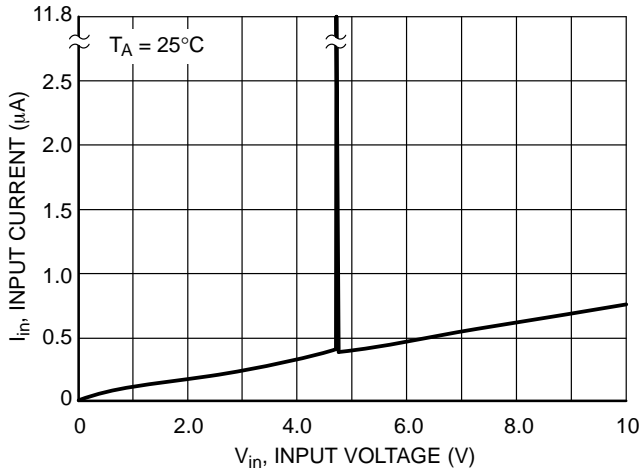


Figure 23. NCP302/3 Series 4.5 V Input Current vs. Input Voltage

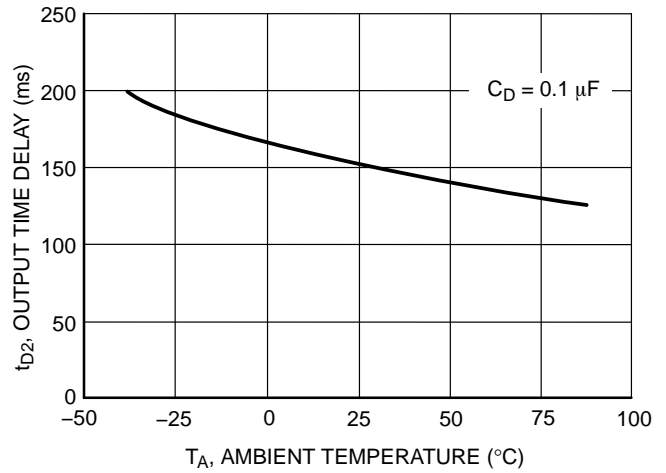


Figure 24. NCP302/3 Series 0.9 V Reset Output Time Delay vs. Temperature

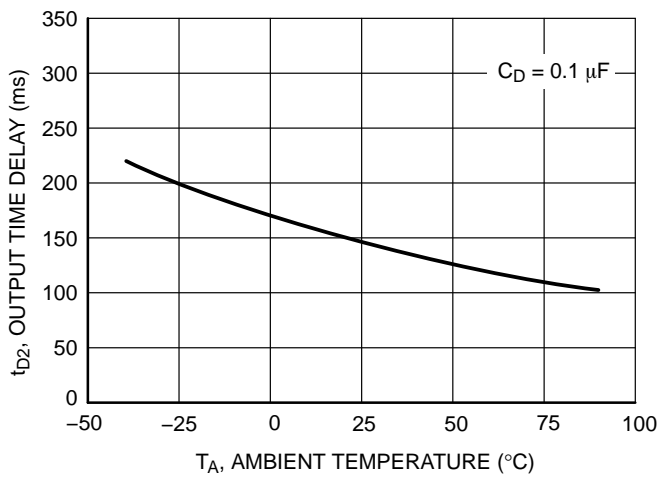


Figure 25. NCP302/3 Series 2.7 V Reset Output Time Delay vs. Temperature

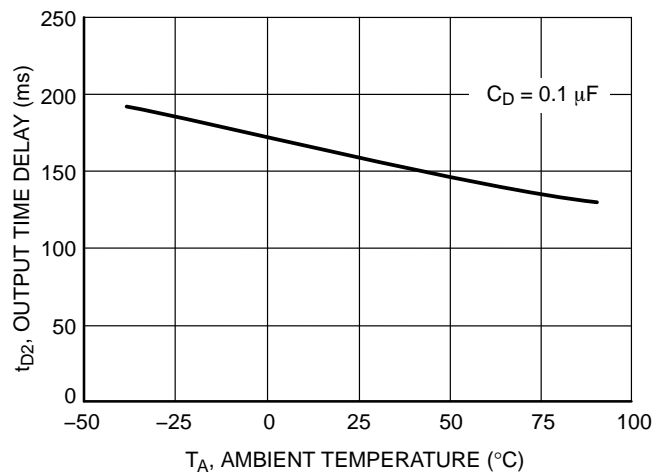


Figure 26. NCP302/3 Series 4.5 V Reset Output Time Delay vs. Temperature

NCP302, NCP303

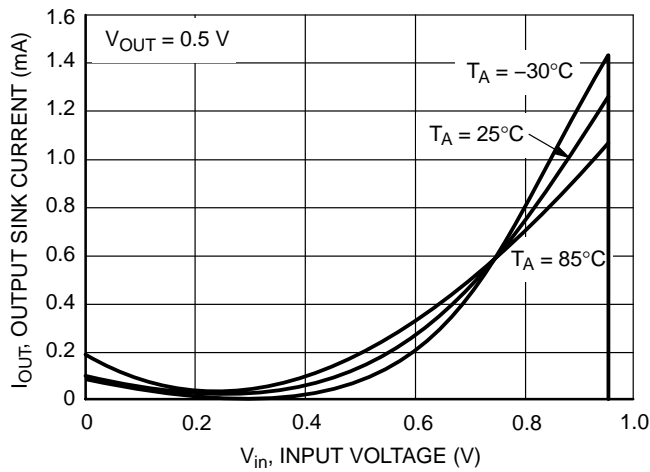


Figure 27. NCP302H/3L Series 0.9 V
Reset Output Sink Current vs. Input Voltage

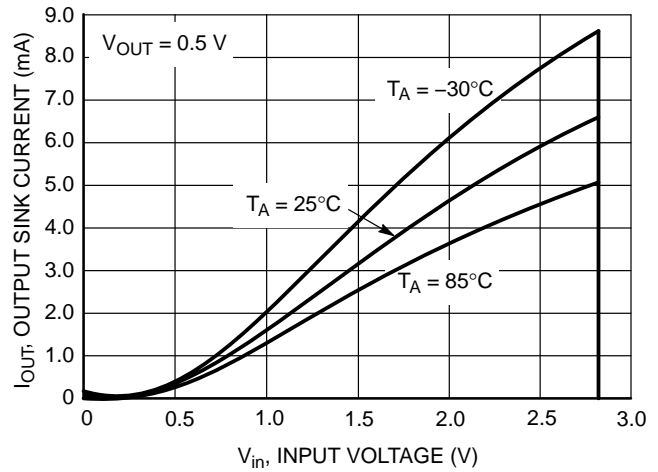


Figure 28. NCP302H/3L Series 2.7 V
Reset Output Sink Current vs. Input Voltage

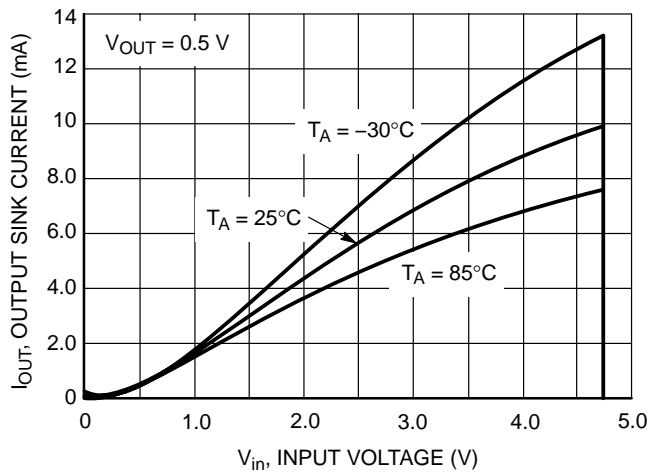


Figure 29. NCP302H/3L Series 4.5 V
Reset Output Sink Current vs. Input Voltage

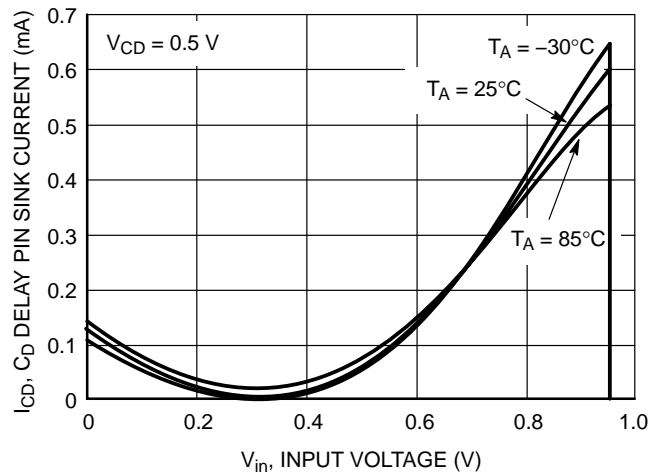


Figure 30. NCP302/3 Series 0.9 V
 C_D Delay Pin Sink Current vs. Input Voltage

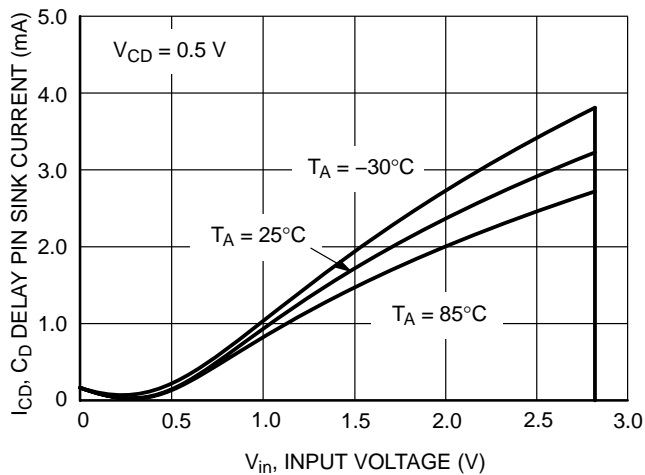


Figure 31. NCP302/3 Series 2.7 V
 C_D Delay Pin Sink Current vs. Input Voltage

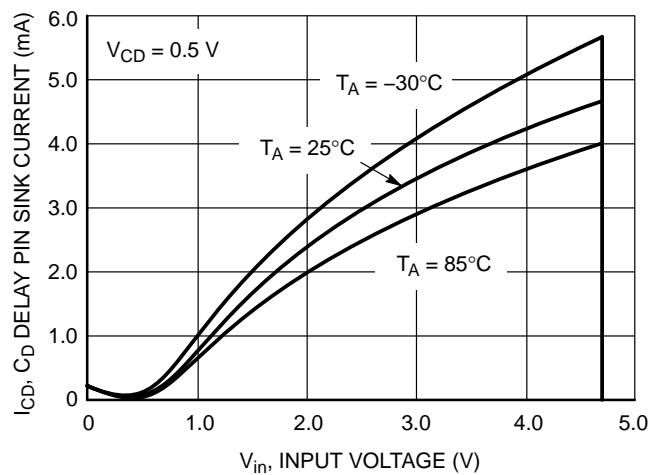


Figure 32. NCP302/3 Series 4.5 V
 C_D Delay Pin Sink Current vs. Input Voltage

NCP302, NCP303

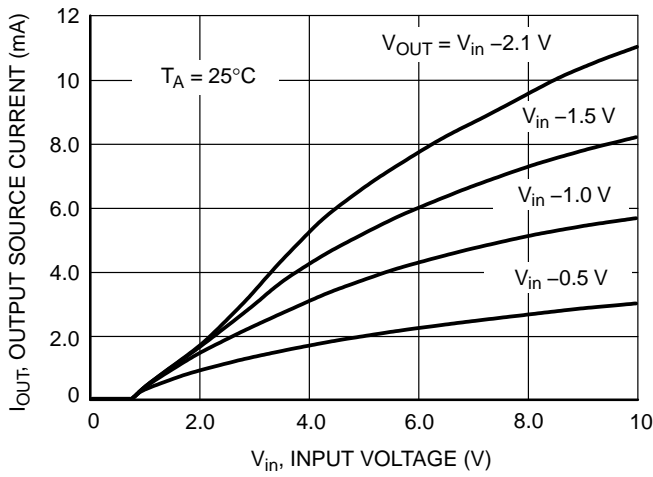


Figure 33. NCP302L Series 0.9 V
Reset Output Source Current vs. Input Voltage

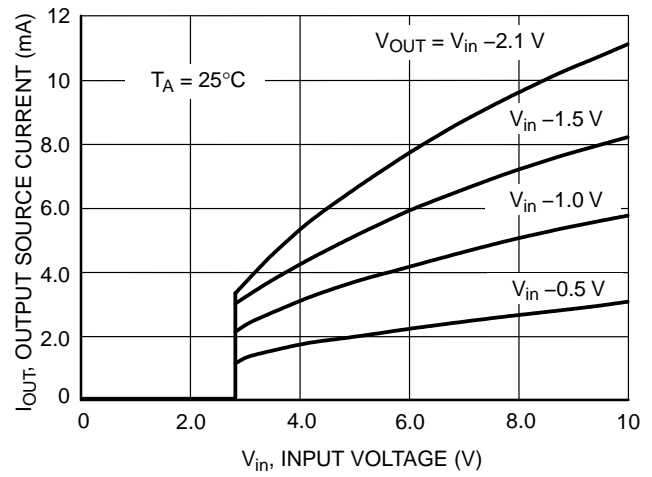


Figure 34. NCP302L Series 2.7 V
Reset Output Source Current vs. Input Voltage

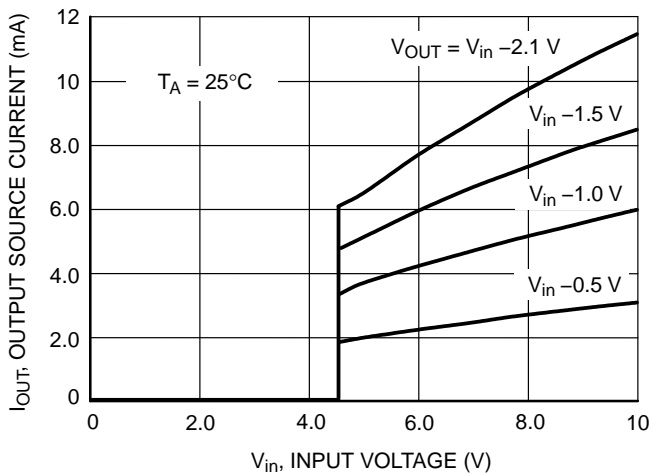


Figure 35. NCP302L Series 4.5 V
Reset Output Source Current vs. Input Voltage

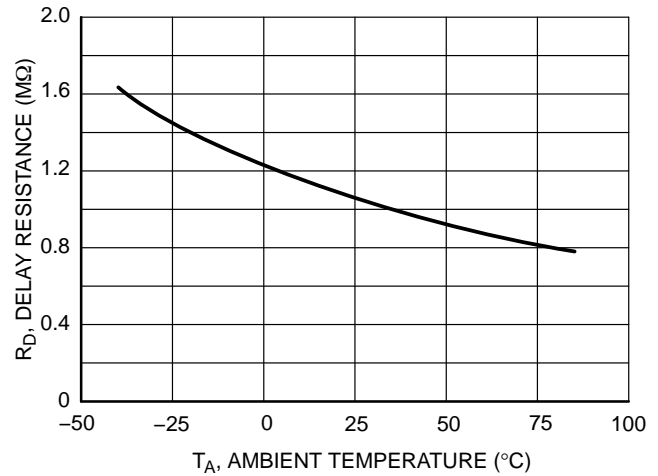


Figure 36. NCP302/3 Series
Delay Resistance vs. Temperature

OPERATING DESCRIPTION

The NCP302 and NCP303 series devices consist of a precision voltage detector that drives a time delay generator. Figures 37 and 38 show a timing diagram and a typical application. Initially consider that input voltage V_{in} is at a nominal level and it is greater than the voltage detector upper threshold (V_{DET+}). The voltage at Pin 5 and capacitor C_D will be at the same level as V_{in} , and the reset output (Pin 1) will be in the high state for active low devices, or in the low state for active high devices. If there is a power interruption and V_{in} becomes significantly deficient, it will fall below the lower detector threshold (V_{DET-}) and the external time delay capacitor C_D will be immediately discharged by an internal N-Channel MOSFET that connects to Pin 5. This sequence of events causes the Reset output to be in the low state for active low devices, or in the high state for active high devices. After completion of the power interruption,

V_{in} will again return to its nominal level and become greater than the V_{DET+} . The voltage detector will turn off the N-Channel MOSFET and allow pullup resistor R_D to charge external capacitor C_D , thus creating a programmable delay for releasing the reset signal. When the voltage at Pin 5 exceeds the inverter/buffer threshold, typically $0.675 V_{in}$, the reset output will revert back to its original state. The reset output time delay versus capacitance is shown in Figures 12 through 14. The voltage detector and inverter/buffer have built-in hysteresis to prevent erratic reset operation.

Although these device series are specifically designed for use as reset controllers in portable microprocessor based systems, they offer a cost-effective solution in numerous applications where precise voltage monitoring and time delay are required. Figures 38 through 45 show various application examples.

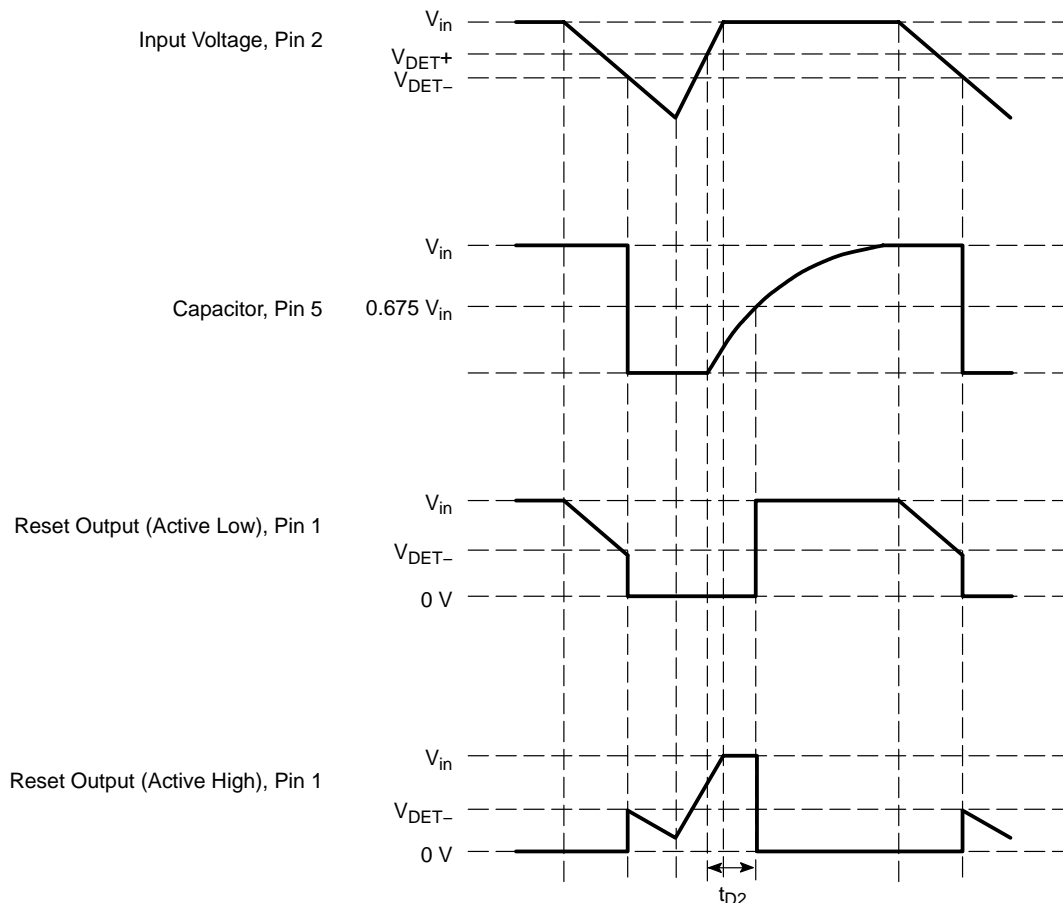


Figure 37. Timing Waveforms

NCP302, NCP303

APPLICATION CIRCUIT INFORMATION

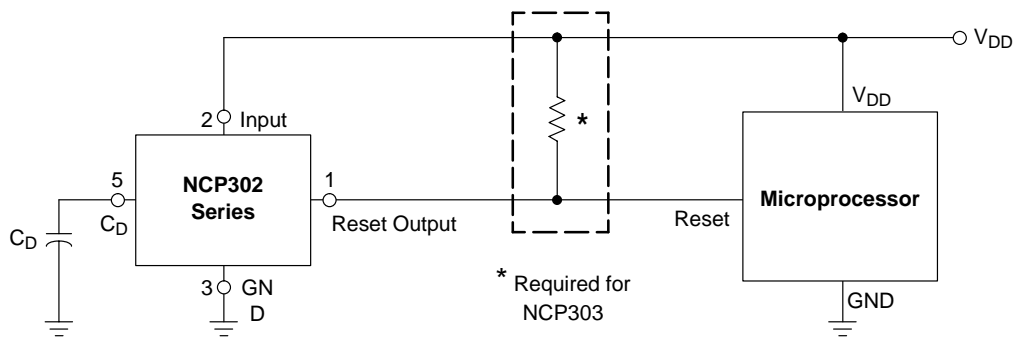


Figure 38. Microprocessor Reset Circuit

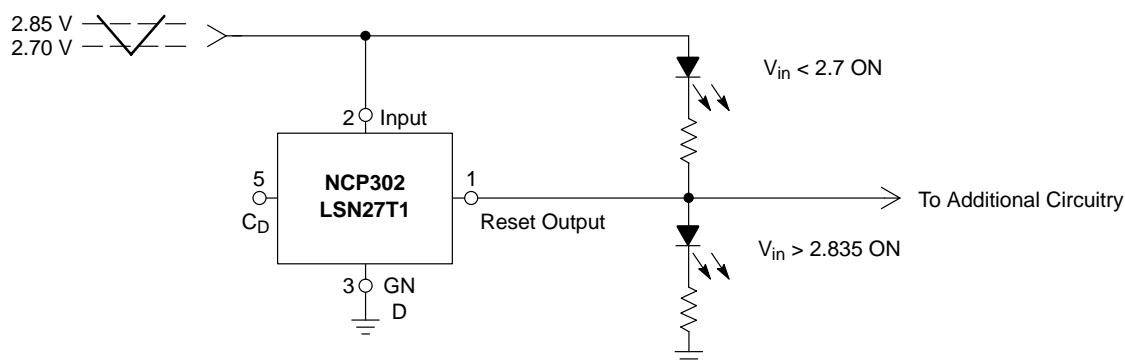


Figure 39. Battery Charge Indicator

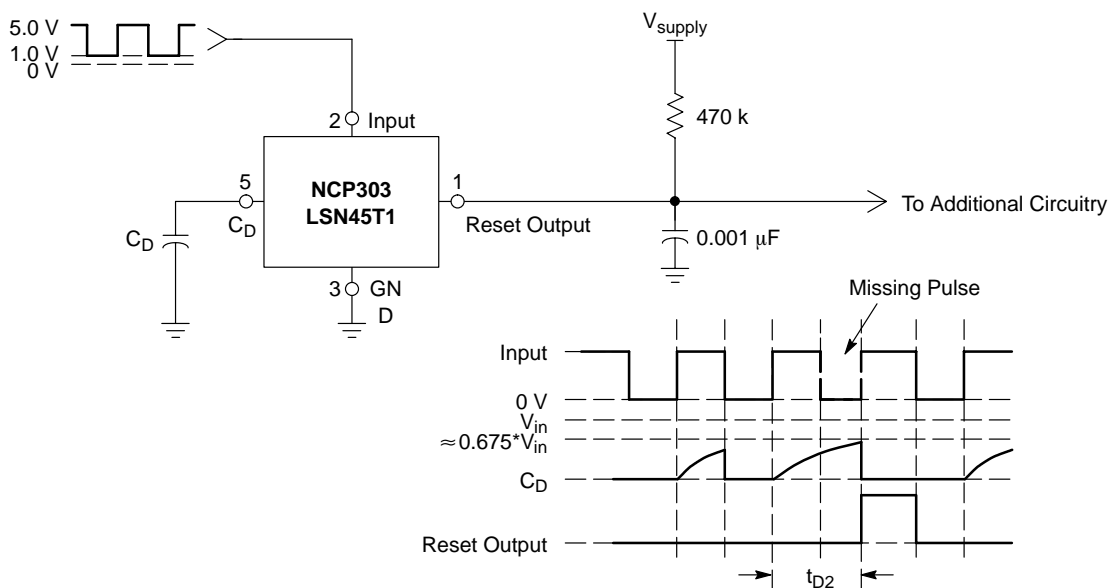


Figure 40. Missing Pulse Detector or Frequency Detector

NCP302, NCP303

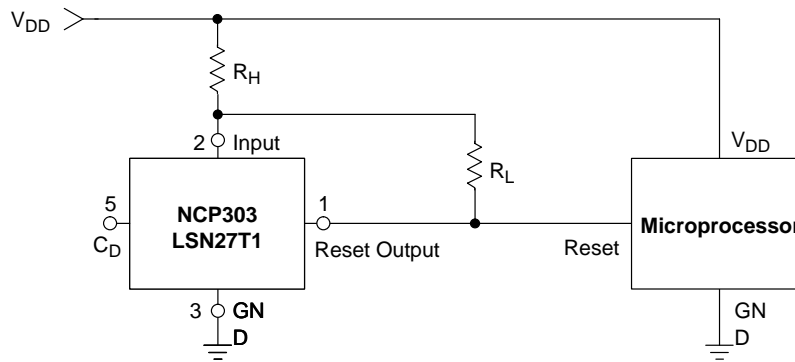


Figure 41. Microprocessor Reset Circuit with Additional Hysteresis

Comparator hysteresis can be increased with the addition of resistor R_H . The hysteresis equations have been simplified and do not account for the change of input current I_{in} as V_{in} crosses the comparator threshold. The internal resistance, R_{in} is simply calculated using $I_{in} = 0.26 \mu A$ at 2.6 V.

V_{in} Decreasing:


$$V_{th} = \left(\frac{R_H}{R_{in}} + 1 \right) (V_{DET-})$$

V_{in} Increasing:

$$V_{th} = \left(\frac{R_H}{R_{in} \parallel R_L} + 1 \right) (V_{DET-} + V_{HYS})$$

$$V_{HYS} = V_{in \text{ Increasing}} - V_{in \text{ Decreasing}}$$

| Test Data | | | | |
|-------------------------|-------------------------|---------------|--------------------|---------------------|
| V_{th} Decreasing (V) | V_{th} Increasing (V) | V_{HYS} (V) | R_H (Ω) | R_L (k Ω) |
| 2.70 | 2.84 | 0.135 | 0 | – |
| 2.70 | 2.87 | 0.17 | 100 | 10 |
| 2.70 | 2.88 | 0.19 | 100 | 6.8 |
| 2.70 | 2.91 | 0.21 | 100 | 4.3 |
| 2.70 | 2.90 | 0.20 | 220 | 10 |
| 2.70 | 2.94 | 0.24 | 220 | 6.8 |
| 2.70 | 2.98 | 0.28 | 220 | 4.3 |
| 2.70 | 2.70 | 0.27 | 470 | 10 |
| 2.70 | 3.04 | 0.34 | 470 | 6.8 |
| 2.70 | 3.15 | 0.35 | 470 | 4.3 |

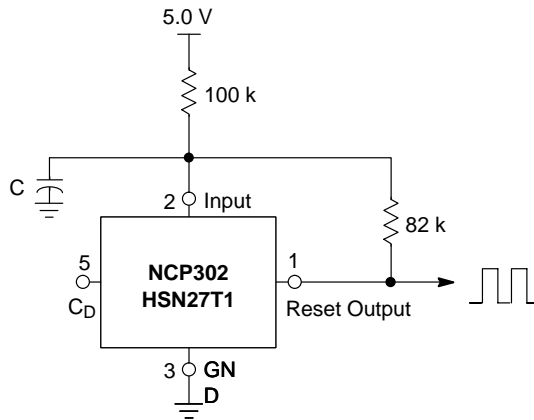

| Test Data | | |
|---------------|-----------------|-------------------|
| C (μF) | f_{OSC} (kHz) | I_Q (μA) |
| 0.01 | 2590 | 21.77 |
| 0.1 | 490 | 21.97 |
| 1.0 | 52 | 22.07 |

Figure 42. Simple Clock Oscillator

NCP302, NCP303


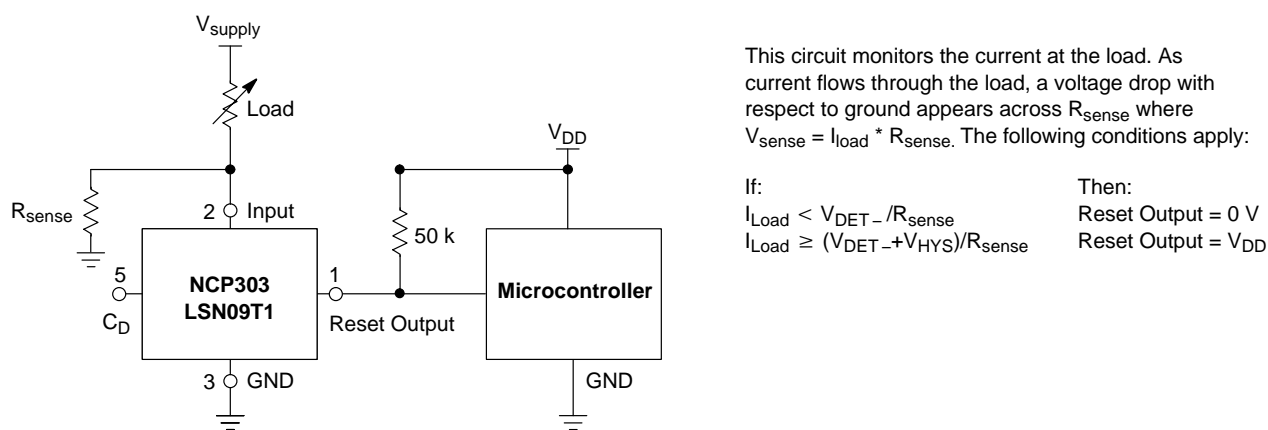



Figure 43. Microcontroller Systems Load Sensing

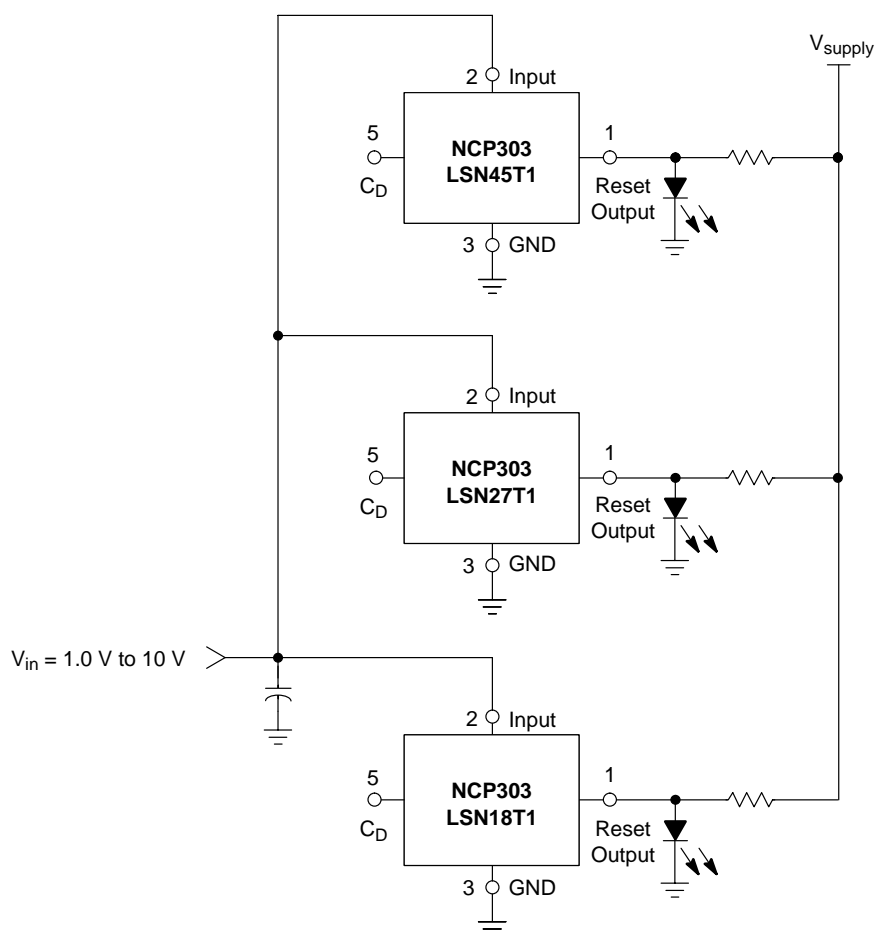

A simple voltage monitor can be constructed by connecting several voltage detectors as shown above. Each LED will sequentially turn on when the respective voltage detector threshold ($V_{DET-} + V_{HYS}$) is exceeded. Note that detector thresholds (V_{DET-}) that range from 0.9 V to 4.9 V in 100 mV steps can be manufactured.

Figure 44. LED Bar Graph Voltage Monitor

NCP302, NCP303

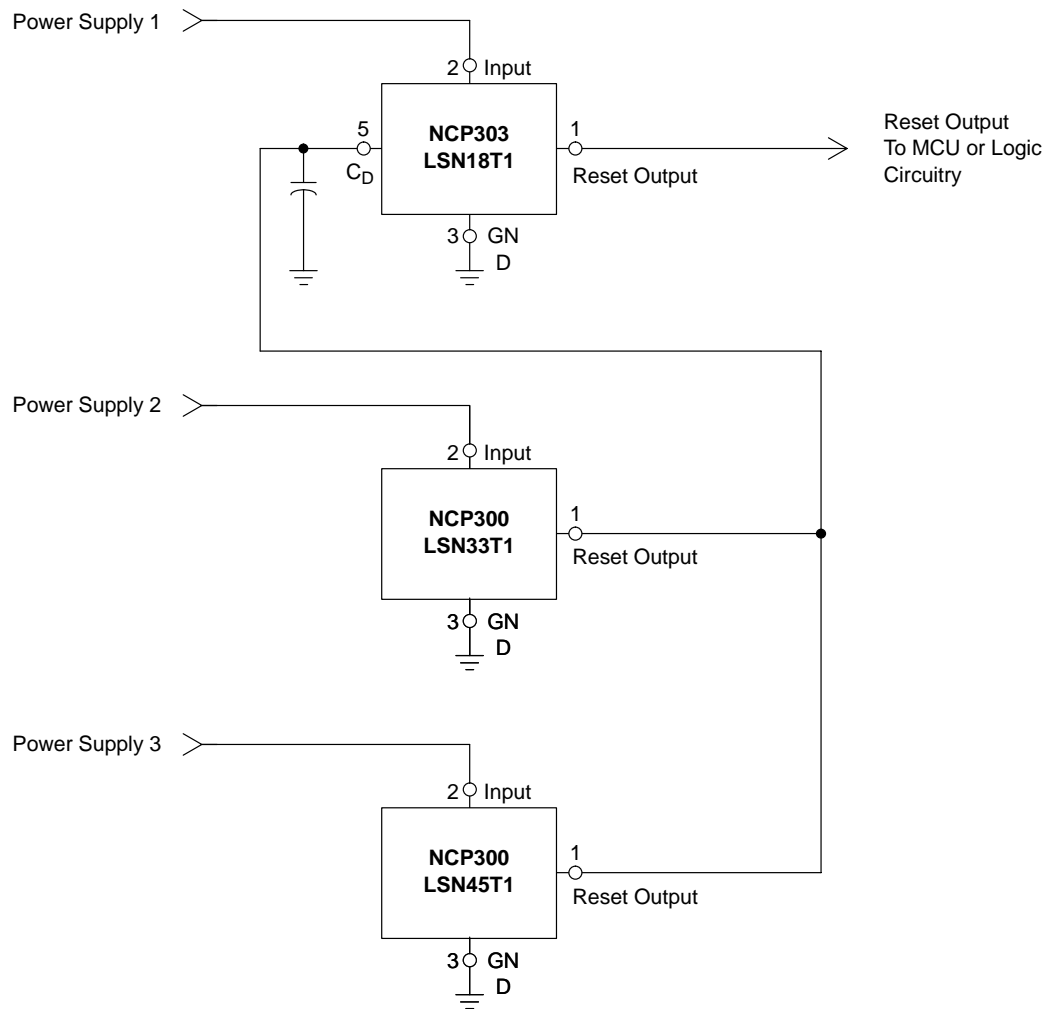

For monitoring power supplies with a time delay reset, only a single NCP303 with delay capacitor is required.

Figure 45. Multiple Power Supply Undervoltage Supervision with Time Delay Reset

NCP302, NCP303

ORDERING INFORMATION

| Device | Threshold Voltage | Output Type | Reset | Marking | Package | Shipping† |
|----------------|-------------------|-------------|-------------|---------|---------------------|-------------------------------------|
| NCP302LSN09T1 | 0.9 | CMOS | Active Low | SBO | TSOP-5 | 3000 / Tape & Reel (7 inch Reel) |
| NCP302LSN09T1G | 0.9 | | | SBO | TSOP-5 (Pb-Free) | |
| NCP302LSN15T1 | 1.5 | | | SBI | TSOP-5 | |
| NCP302LSN18T1 | 1.8 | | | SBF | TSOP-5 | |
| NCP302LSN20T1 | 2.0 | | | SBD | TSOP-5 | |
| NCP302LSN27T1 | 2.7 | | | SAW | TSOP-5 | |
| NCP302LSN27T1G | 2.7 | | | SAW | TSOP-5 (Pb-Free) | |
| NCP302LSN30T1 | 3.0 | | | SAT | TSOP-5 | |
| NCP302LSN30T1G | 3.0 | | | SAT | TSOP-5 (Pb-Free) | |
| NCP302LSN33T1 | 3.3 | | | SAQ | TSOP-5 | |
| NCP302LSN33T1G | 3.3 | | | SAQ | TSOP-5 (Pb-Free) | |
| NCP302LSN38T1 | 3.8 | | | SAK | TSOP-5 (Pb-Free) | |
| NCP302LSN38T1G | 3.8 | | | SAK | TSOP-5 | |
| NCP302LSN40T1 | 4.0 | | | SAI | TSOP-5 | |
| NCP302LSN43T1 | 4.3 | | | SAF | TSOP-5 | |
| NCP302LSN45T1 | 4.5 | | | SAL | TSOP-5 | |
| NCP302LSN45T1G | 4.5 | | | SAL | TSOP-5 (Pb-Free) | |
| NCP302LSN47T1 | 4.7 | | | SAC | TSOP-5 | |
| NCP302HSN09T1 | 0.9 | CMOS | Active High | SDO | TSOP-5 | |
| NCP302HSN18T1 | 1.8 | | | SFH | TSOP-5 | |
| NCP302HSN27T1 | 2.7 | | | SDK | TSOP-5 | |
| NCP302HSN30T1 | 3.0 | | | SDI | TSOP-5 | |
| NCP302HSN40T1 | 4.0 | | | SJH | TSOP-5 | |
| NCP302HSN45T1 | 4.5 | | | SDG | TSOP-5 | |
| NCP302HSN45T1G | 4.5 | | | SDG | TSOP-5 (Pb-Free) | |
| NCP303LSN09T1 | 0.9 | Open Drain | Active Low | SDE | TSOP-5 | |
| NCP303LSN09T1G | 0.9 | | | SDE | TSOP-5 (Pb-Free) | |
| NCP303LSN10T1 | 1.0 | | | SDD | TSOP-5 | |
| NCP303LSN10T1G | 1.0 | | | SDD | TSOP-5 (Pb-Free) | |
| NCP303LSN11T1 | 1.1 | | | SDC | TSOP-5 | |

NOTE: The ordering information lists standard undervoltage thresholds with active low outputs. Additional active low threshold devices, ranging from 0.9 V to 4.9 V in 100 mV increments and NCP302 active high output devices, ranging from 0.9 V to 4.9 V in 100 mV increments can be manufactured. Contact your ON Semiconductor representative for availability. The electrical characteristics of these additional devices are shown in Tables 1 and 2.

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

NCP302, NCP303

ORDERING INFORMATION

| Device | Threshold Voltage | Output Type | Reset | Marking | Package | Shipping† |
|----------------|-------------------|-------------|------------|---------|---------------------|-------------------------------------|
| NCP303LSN13T1 | 1.3 | Open Drain | Active Low | SDA | TSOP-5 | 3000 / Tape & Reel (7 inch Reel) |
| NCP303LSN14T1 | 1.4 | | | SCZ | TSOP-5 | |
| NCP303LSN15T1 | 1.5 | | | SCY | TSOP-5 | |
| NCP303LSN15T1G | 1.5 | | | SCY | TSOP-5 (Pb-Free) | |
| NCP303LSN16T1 | 1.6 | | | SCX | TSOP-5 | |
| NCP303LSN18T1 | 1.8 | | | SCV | TSOP-5 | |
| NCP303LSN20T1 | 2.0 | | | SCT | TSOP-5 | |
| NCP303LSN20T1G | 2.0 | | | SCT | TSOP-5 (Pb-Free) | |
| NCP303LSN22T1 | 2.2 | | | SCR | TSOP-5 | |
| NCP303LSN23T1 | 2.3 | | | SCQ | TSOP-5 | |
| NCP303LSN24T1 | 2.4 | | | SCP | TSOP-5 | |
| NCP303LSN25T1 | 2.5 | | | SCO | TSOP-5 | |
| NCP303LSN25T1G | 2.5 | | | SCO | TSOP-5 (Pb-Free) | |
| NCP303LSN26T1 | 2.6 | | | SCN | TSOP-5 | |
| NCP303LSN26T1G | 2.6 | | | SCN | TSOP-5 (Pb-Free) | |
| NCP303LSN27T1 | 2.7 | | | SCM | TSOP-5 | |
| NCP303LSN27T1G | 2.7 | | | SCM | TSOP-5 (Pb-Free) | |
| NCP303LSN28T1 | 2.8 | | | SCL | TSOP-5 | |
| NCP303LSN28T1G | 2.8 | | | SCL | TSOP-5 (Pb-Free) | |
| NCP303LSN29T1 | 2.9 | | | SCK | TSOP-5 | |
| NCP303LSN29T1G | 2.9 | | | SCK | TSOP-5 (Pb-Free) | |
| NCP303LSN30T1 | 3.0 | | | SCJ | TSOP-5 | |
| NCP303LSN30T1G | 3.0 | | | SCJ | TSOP-5 (Pb-Free) | |
| NCP303LSN31T1 | 3.1 | | | SCI | TSOP-5 | |
| NCP303LSN32T1 | 3.2 | | | SCH | TSOP-5 | |
| NCP303LSN33T1 | 3.3 | | | SCG | TSOP-5 | |
| NCP303LSN34T1 | 3.4 | | | SCF | TSOP-5 | |
| NCP303LSN36T1 | 3.6 | | | SCD | TSOP-5 | |
| NCP303LSN38T1 | 3.8 | | | SCA | TSOP-5 | |

NOTE: The ordering information lists standard undervoltage thresholds with active low outputs. Additional active low threshold devices, ranging from 0.9 V to 4.9 V in 100 mV increments and NCP302 active high output devices, ranging from 0.9 V to 4.9 V in 100 mV increments can be manufactured. Contact your ON Semiconductor representative for availability. The electrical characteristics of these additional devices are shown in Tables 1 and 2.

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

NCP302, NCP303

ORDERING INFORMATION

| Device | Threshold Voltage | Output Type | Reset | Marking | Package | Shipping [†] |
|----------------|-------------------|-------------|------------|---------|---------------------|-------------------------------------|
| NCP303LSN40T1 | 4.0 | Open Drain | Active Low | SBY | TSOP-5 | 3000 / Tape & Reel (7 inch Reel) |
| NCP303LSN42T1 | 4.2 | | | SBW | TSOP-5 | |
| NCP303LSN42T1G | 4.2 | | | SBW | TSOP-5 (Pb-Free) | |
| NCP303LSN44T1 | 4.4 | | | SBU | TSOP-5 | |
| NCP303LSN44T1G | 4.4 | | | SBU | TSOP-5 (Pb-Free) | |
| NCP303LSN45T1 | 4.5 | | | SBT | TSOP-5 | |
| NCP303LSN45T1G | 4.5 | | | SBT | TSOP-5 (Pb-Free) | |
| NCP303LSN46T1 | 4.6 | | | SBS | TSOP-5 | |
| NCP303LSN46T1G | 4.6 | | | SBS | TSOP-5 (Pb-Free) | |
| NCP303LSN47T1 | 4.7 | | | SBR | TSOP-5 | |


NOTE: The ordering information lists standard undervoltage thresholds with active low outputs. Additional active low threshold devices, ranging from 0.9 V to 4.9 V in 100 mV increments and NCP302 active high output devices, ranging from 0.9 V to 4.9 V in 100 mV increments can be manufactured. Contact your ON Semiconductor representative for availability. The electrical characteristics of these additional devices are shown in Tables 1 and 2.

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

NCP302, NCP303

PACKAGE DIMENSIONS

THIN SOT-23-5/TSOP-5/SC59-5 CASE 483-02 ISSUE C

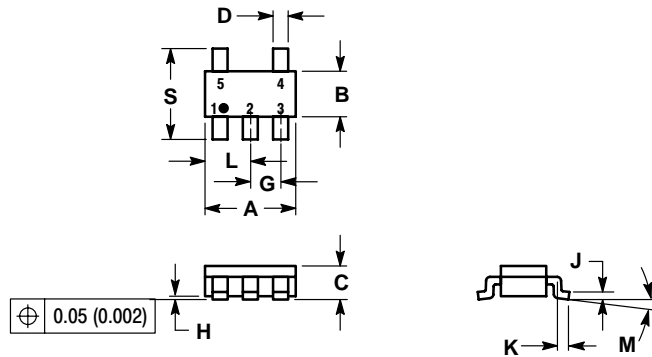


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. A AND B DIMENSIONS DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.


| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|--------|--------|
| | MIN | MAX | MIN | MAX |
| A | 2.90 | 3.10 | 0.1142 | 0.1220 |
| B | 1.30 | 1.70 | 0.0512 | 0.0669 |
| C | 0.90 | 1.10 | 0.0354 | 0.0433 |
| D | 0.25 | 0.50 | 0.0098 | 0.0197 |
| E | 0.85 | 1.05 | 0.0335 | 0.0413 |
| F | 0.013 | 0.100 | 0.0005 | 0.0040 |
| G | 0.10 | 0.26 | 0.0040 | 0.0102 |
| H | 0.20 | 0.60 | 0.0079 | 0.0236 |
| I | 1.25 | 1.55 | 0.0493 | 0.0610 |
| J | 0 | 10 | 0 | 10 |
| K | 2.50 | 3.00 | 0.0985 | 0.1181 |

SOLDERING FOOTPRINT*

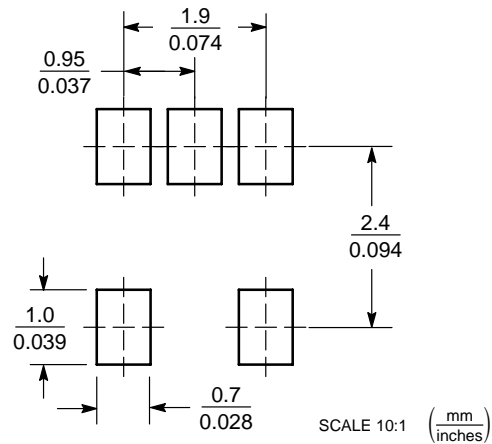

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

NCP302, NCP303

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 61312, Phoenix, Arizona 85082-1312 USA
Phone: 480-829-7710 or 800-344-3860 Toll Free USA/Canada
Fax: 480-829-7709 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051
Phone: 81-3-5773-3850

ON Semiconductor Website: <http://onsemi.com>

Order Literature: <http://www.onsemi.com/litorder>

For additional information, please contact your
local Sales Representative.