

2SB953, 2SB953A

Silicon PNP epitaxial planar type

For low-voltage switching

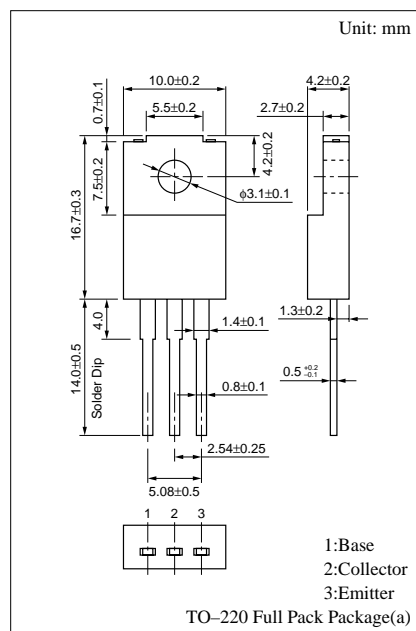
Complementary to 2SD1444 and 2SD1444A

■ Features

- Low collector to emitter saturation voltage $V_{CE(sat)}$
- High-speed switching
- Full-pack package which can be installed to the heat sink with one screw

■ Absolute Maximum Ratings (T_C=25°C)

Parameter		Symbol	Ratings	Unit
Collector to base voltage	2SB953	V_{CBO}	−40	V
	2SB953A		−50	
Collector to emitter voltage	2SB953	V_{CEO}	−20	V
	2SB953A		−40	
Emitter to base voltage		V_{EBO}	−5	V
Peak collector current		I_{CP}	−12	A
Collector current		I_C	−7	A
Collector power dissipation	$T_C=25^{\circ}C$	P_C	30	W
	$T_a=25^{\circ}C$		2	
Junction temperature		T_j	150	$^{\circ}C$
Storage temperature		T_{stg}	−55 to +150	$^{\circ}C$



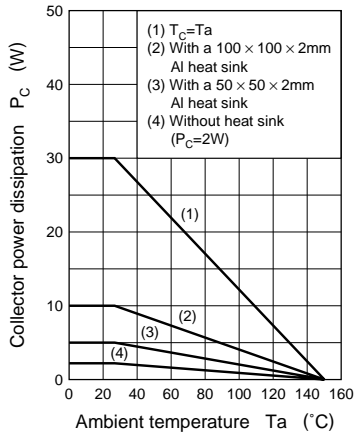
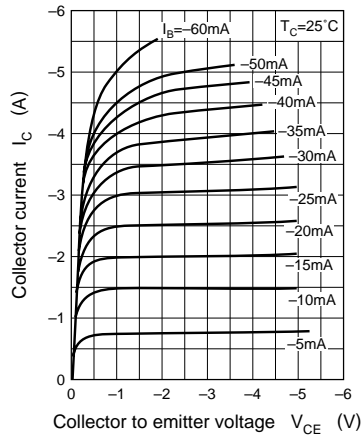
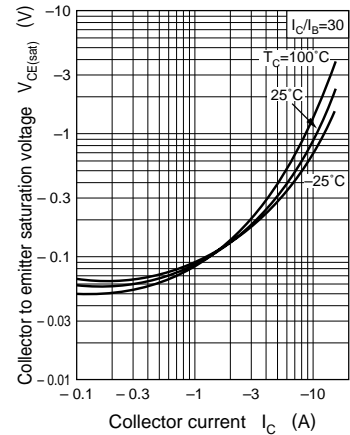
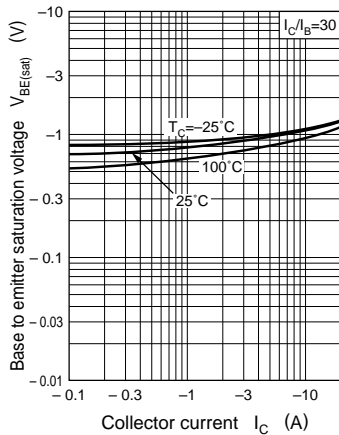
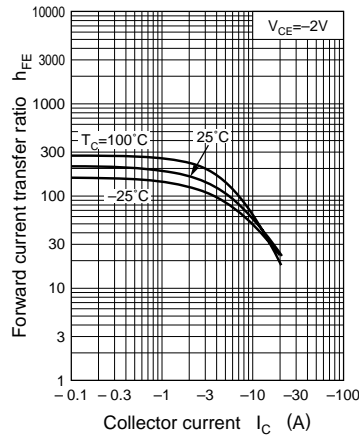
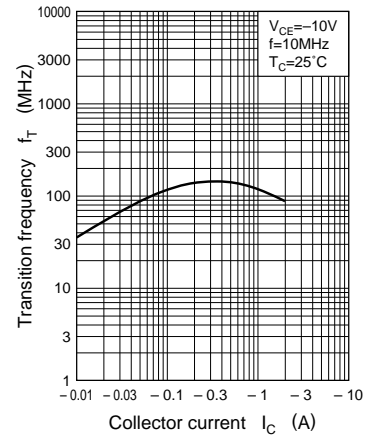
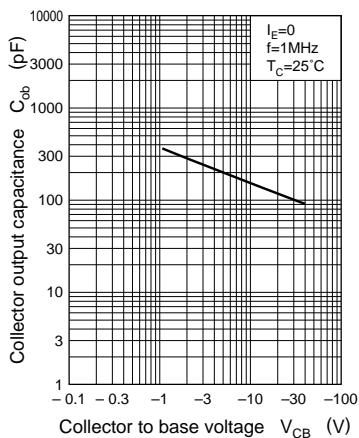
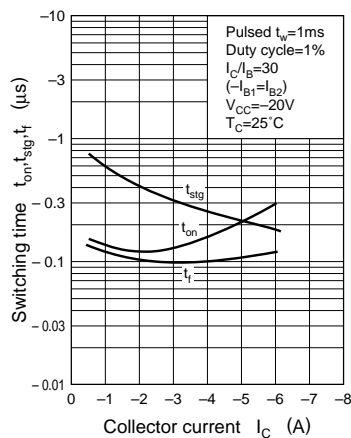
■ Electrical Characteristics (T_C=25°C)

Parameter		Symbol	Conditions	min	typ	max	Unit
Collector cutoff current	2SB953	I_{CBO}	$V_{CB} = -40V, I_E = 0$			-50	μA
	2SB953A		$V_{CB} = -50V, I_E = 0$		-50		
Emitter cutoff current		I_{EBO}	$V_{EB} = -5V, I_C = 0$			-50	μA
Collector to emitter voltage	2SB953	V_{CEO}	$I_C = -10mA, I_B = 0$	-20			V
	2SB953A			-40			
Forward current transfer ratio		h_{FE1}	$V_{CE} = -2V, I_C = -0.1A$	45			
		h_{FE2}^*	$V_{CE} = -2V, I_C = -2A$	90		260	
Collector to emitter saturation voltage		$V_{CE(sat)}$	$I_C = -5A, I_B = -0.16A$			-0.6	V
Base to emitter saturation voltage		$V_{BE(sat)}$	$I_C = -5A, I_B = -0.16A$			-1.5	V
Transition frequency		f_T	$V_{CE} = -10V, I_C = -0.5A, f = 10MHz$		150		MHz
Collector output capacitance		C_{ob}	$V_{CB} = -10V, I_E = 0, f = 1MHz$		140		pF
Turn-on time		t_{on}	$I_C = -2A, I_{B1} = -66mA, I_{B2} = 66mA$		0.1		μs
Storage time		t_{stg}			0.5		μs
Fall time		t_f			0.1		μs

*h_{FE2} Rank classification

Rank	Q	P
h_{FE2}	90 to 180	130 to 260

Note: Ordering can be made by the common rank (PQ rank $h_{FE2} = 90$ to 260) in the rank classification.

$P_C - T_a$  $I_C - V_{CE}$  $V_{CE(\text{sat})} - I_C$  $V_{BE(\text{sat})} - I_C$  $h_{FE} - I_C$  $f_T - I_C$  $C_{ob} - V_{CB}$  $t_{on}, t_{stg}, t_f - I_C$ 

Area of safe operation (ASO)

