

ER2A THRU ER2J

SURFACE MOUNT SUPERFAST RECTIFIER

VOLTAGE - 50 to 600 Volts CURRENT - 2.0 Amperes

FEATURES

- For surface mounted applications
- Low profile package
- Built-in strain relief
- Easy pick and place
- Superfast recovery times for high efficiency
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- Glass passivated junction
- High temperature soldering:
260 °C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AA molded plastic


Terminals: Solder plated, solderable per
MIL-STD-750, Method 2026

Polarity: Indicated by cathode band

Standard packaging: 12mm tape (EIA-481)

Weight: 0.003 ounce, 0.093 gram

SMB/DO-214AA

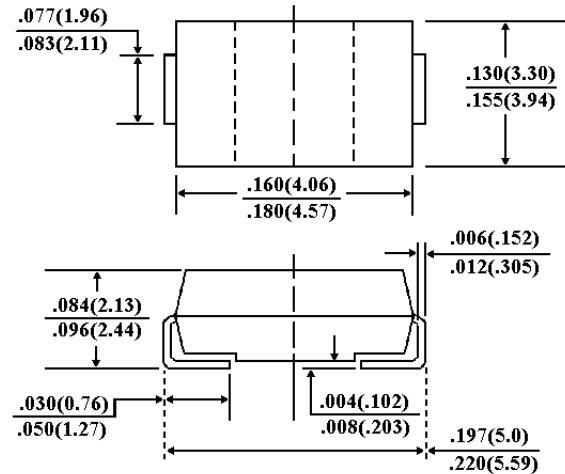

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	SYMBOLS	ER2A	ER2B	ER2C	ER2D	ER2E	ER2G	ER2J	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	600	Volts
Maximum RMS Voltage	V _{RMS}	35	70	105	140	210	280	420	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	600	Volts
Maximum Average Forward Rectified Current, at T _L =110 ℄J	I _(AV)	2.0							Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I _{FSM}	50.0							Amps
Maximum Instantaneous Forward Voltage at 2.0A	V _F	0.95				1.25		1.7	Volts
Maximum DC Reverse Current T _A =25 ℄J	I _R	5.0							℄g A
At Rated DC Blocking Voltage T _A =100 ℄J		150							
Maximum Reverse Recovery Time (Note 1)	T _{RR}	35.0							nS
Typical Junction capacitance (Note 2)	C _J	25.0							pF
Typical Thermal Resistance (Note 3)	R ℄KJL	20.0							℄J/W
Operating and Storage Temperature Range	T _J ,T _{STG}	-50 to +150							℄J

NOTES:

1. Reverse Recovery Test Conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$
2. Measured at 1 MHz and Applied reverse voltage of 4.0 volts
3. 8.0mm^2 (.013mm thick) land areas

RATING AND CHARACTERISTIC CURVES

ER2A THRU ER2J

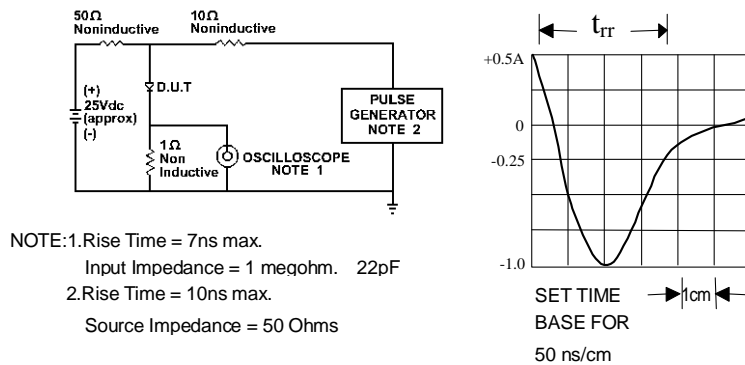


Fig. 1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

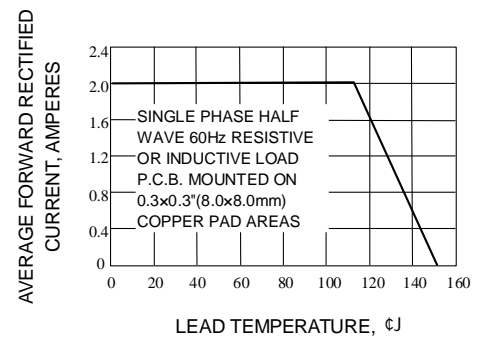


Fig. 2-MAXIMUM AVERAGE FORWARD CURRENT RATING

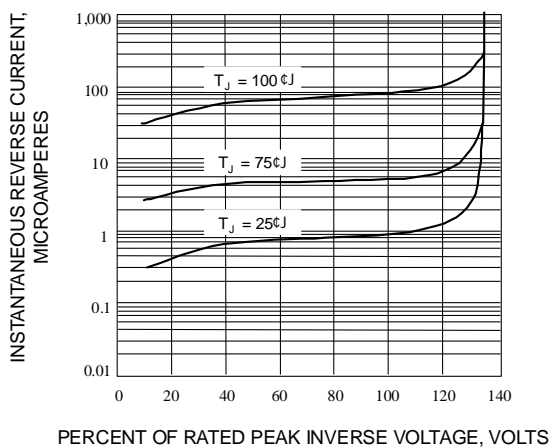


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

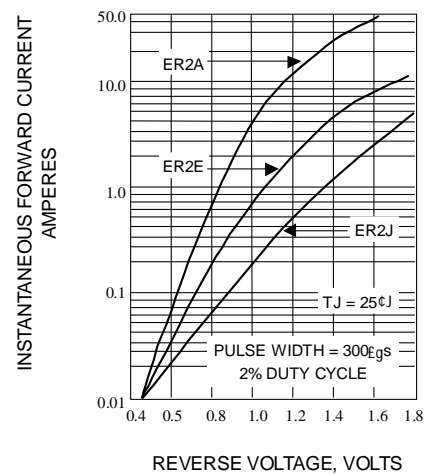


Fig. 4-TYPICAL FORWARD CHARACTERISTICS

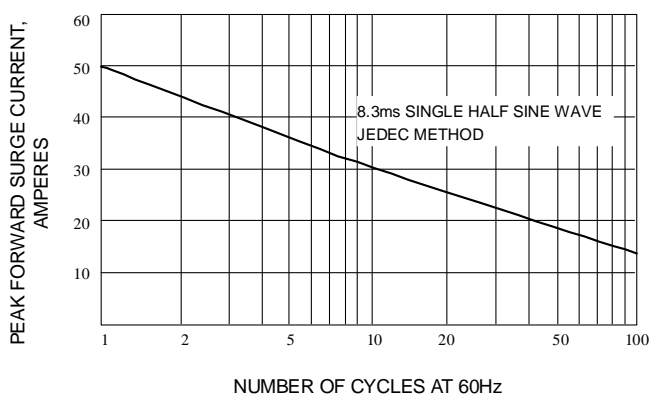


Fig. 5-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

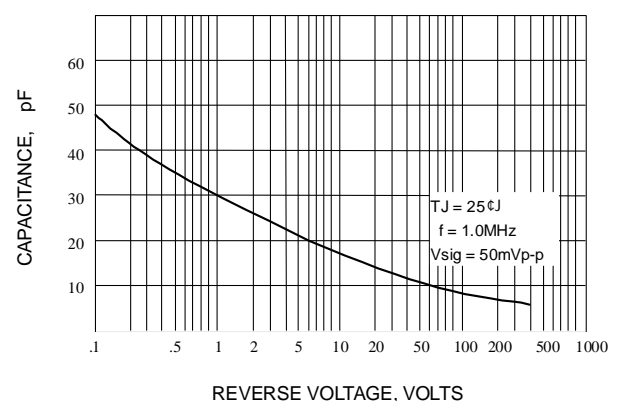


Fig. 6-TYPICAL JUNCTION CAPACITANCE