




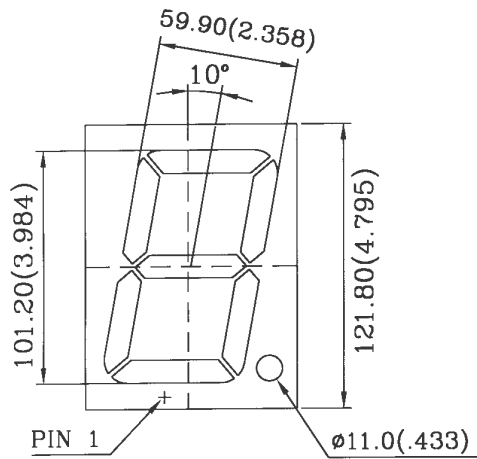
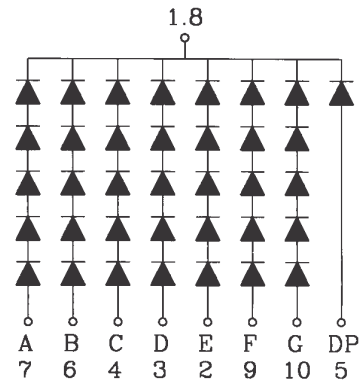
Shape	Part No.		Chip		Wave Length $\lambda$ p(nm)	Electro-Optical Characteristics			Fig.No.
	Common Cathode	Common Anode	Raw Material	Emitted Color		Vf(V)20mA Typ.	Max.	Iv(ucd)10mA Typ.	
	C-4001E-5	A-4001E-5	GaAsP/GaP	Hi.effi Red	635	10.5	13.5	9000	D23
	C-4001G-5	A-4001G-5	GaP	Green	565	11.0	13.5	8000	
	C-4001Y-5	A-4001Y-5	GaAsP/GaP	Yellow	585	10.5	12.5	8000	
	C-4001SR-5	A-4001SR-5	GaAlAs	Super Red	660	9.5	11.0	50000	


Fig. D23



C-4001X-5



A-4001X-5

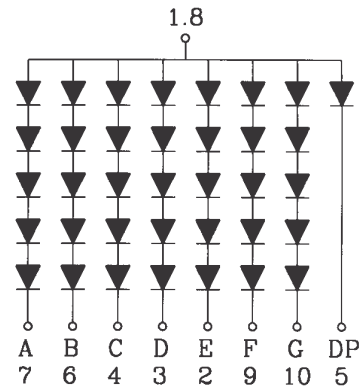

1.All dimension are in millimeters (inches).

2.Tolerance is  $\pm 0.25$  mm (0.01") unless otherwise specified.