



◆ PACKAGE DIMENSIONS

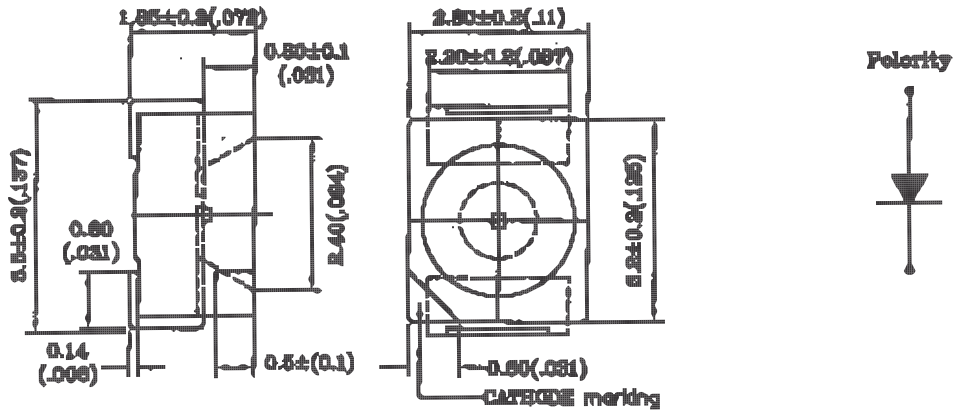

Polarity referring onto the cathode mark is reversed on the SR/LR

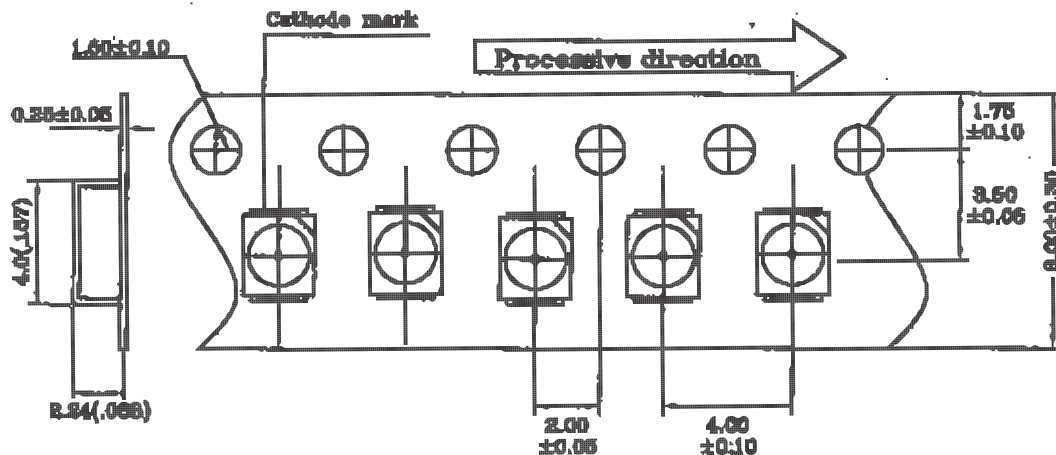

Loaded quantity per reel : 3000 pcs/reel

Part No.	Chip		Lens Color	Wave Length λ p(nm)	Electro-Optical Characteristics			View Angle (deg)
	Raw Material	Emitted Color			Vf(V)20mA		lv(mcd)20mA	
					Typ.	Max.	Typ.	
L-955GC-TR	GaP	Green	Water Clear	565	2.1	2.6	20.0	120
L-955SGC-TR	GaP	Super Green	Water Clear	565	2.1	2.6	30.0	120
L-955YC-TR	GaAsP/GaP	Yellow	Water Clear	585	2.1	3.0	17.0	120
L-955EC-TR	GaAsP/GaP	Hi.effi Red	Water Clear	635	2.1	3.0	23.0	120
L-955SRC-TR	GaAlAs	Super Red	Water Clear	660	1.8	2.2	140	120
L-955URC-TR	GaAlAs	Super Red	Water Clear	660	1.8	2.2	280	120
L-955VEC-TR	GaAlInP	Super Orange	Water Clear	625	2.1	2.4	300	120
L-955UYC-TR	GaAlInP	Super Yellow	Water Clear	592	2.1	2.4	280	120
L-955LPG1C-TR	GaInN	Green	Water Clear	525	3.5	4.0	280	120
L-955UBC-TR	GaInN	Blue	Water Clear	468	3.5	4.0	180	120
L-955LWC-TR	GaInN	White	Water Clear		3.5	4.0	380	120
L-955RGB-4	GaAlAs	Red	Water Clear	625	1.8	2.4	160	120
	GaInN	Green		525	3.5	4.0	200	
	GaInN	Blue		470	3.5	4.0	65.0	

1.All dimension are in millimeters (inches).

2.Tolerance is ± 0.25 mm (0.01") unless otherwise specified.