




- Common Mode Choke for EMI Reduction
- Add "-RC" after part number for RoHS Compliant


Electrical Parameters @ 25° C

OCL (μ H Min.)	Interwinding Capacitance (pF Max.)	Leakage Inductance (μ H Max.)	DCR (Max.)
36	15	0.3	0.4

Package

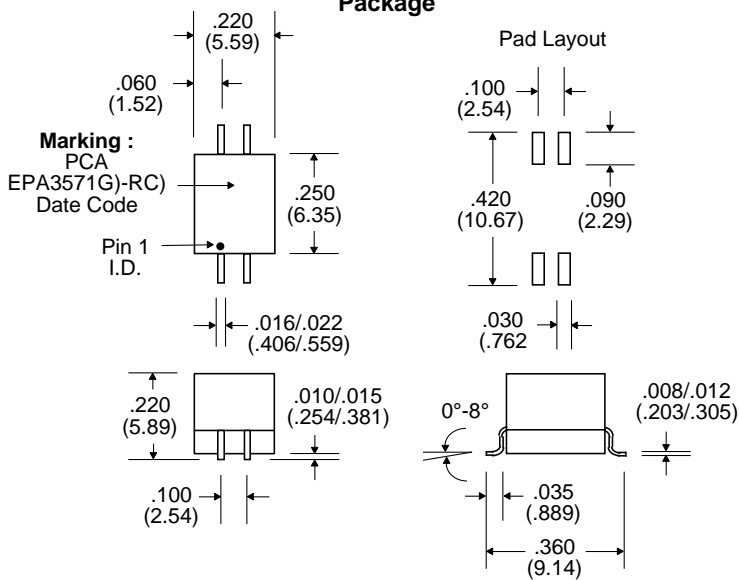


Typical Common Mode Impedance ()

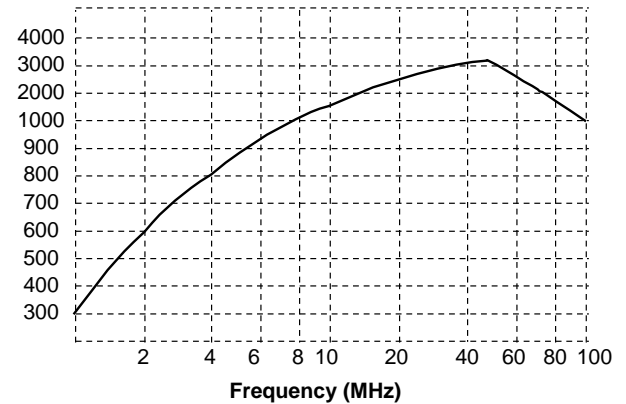

Notes :	EPA3571G	EPA3571G-RC
1. Lead Finish	SnPb	Matte Tin
2. Peak Temperature Rating	225°C	260°C
3. Moisture Sensitive Levels	MSL = 3 (168 Hours, 30°C/60%RH)	MSL = 4 (72 Hours, 30°C/60%RH)
4. Weight	TBD grams	TBD grams
5. Packaging Information (Tube)	TBD pieces/tube	TBD pieces/tube
(*Add "TR" to end of part number, but in front of "-RC" when placing order) (Tape & Reel)	TBD pieces/13" reel (*EPA3571GTR)	TBD pieces/13" reel (*EPA3571GTR-RC)

Schematic



Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25