

Stand-Off Type Low Power Push-Pull Transformers

EPC3126-X




- Designed for use with Maxim Max 253/845
- Operating Temperature : -40°C to +85°C
- UL1446 Class F Insulating System
- UL94-V0 Recognized Materials
- Teflon FEP Insulation
- Up to 1 Watt

Electrical Parameters @ 25° C


PCA Part Number	Voltage (V)		Primary OCL (μH Typ.)	Turns Ratio (Pri. to Sec.)	ET (V-μSec.)	Duty Cycle (%)	Rectification (Half or Full Wave)
	V in	V out					
EPC3126-1	5	15	793	1CT:2CT	11	75	Voltage Doubler
EPC3126-2	3.3	5	793	1CT:2CT	11	75	† Output Center Tap
EPC3126-3	5	5	793	1CT:1.3CT	11	75	† Output Center Tap
EPC3126-4	5	10	793	1CT:1.3CT	11	75	Voltage Doubler
EPC3126-5	5	12	793	1CT:2.6CT	11	77	† Output Center Tap
EPC3126-6	5	24	793	1CT:3CT	11	80	† Output Center Tap
EPC3126-7	3.3	5	793	1CT:3CT	11	80	Voltage Doubler
EPC3126-8	5	5	793	1CT:1CT	11	75	Voltage Doubler
EPC3126-9	5	5	793	1CT:0.6CT	11	83	Voltage Doubler
EPC3126-10	5	12	793	1CT:1.5CT	11	80	Voltage Doubler

• **Switching Frequency** : 250 KHz - 1 MHz • **Isolation** : 4500 Vrms (1 minute) • **† Connections** : Output Center Tap as Common/Return •

Schematic



Package

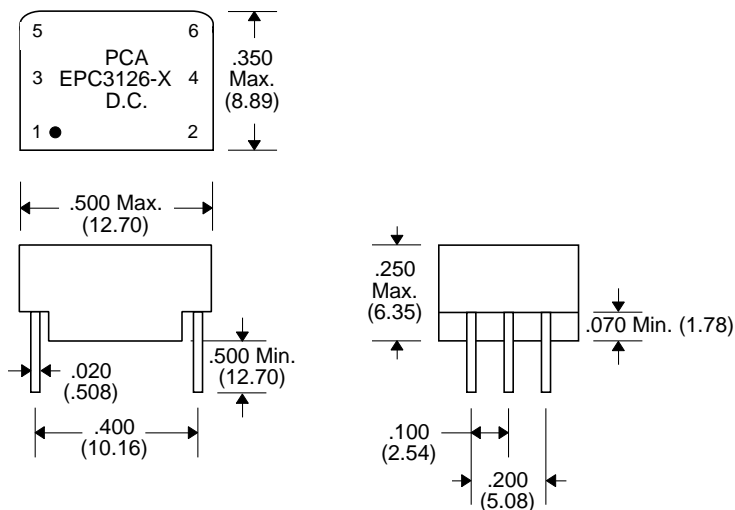

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25