


DEVICE NAME : SU 405-2
Mechanical Data :

Page # : 1 of 1
Date : 16/10/98
ISSUED BY : Joan Low Poh Chee
Rev Date : Index #:

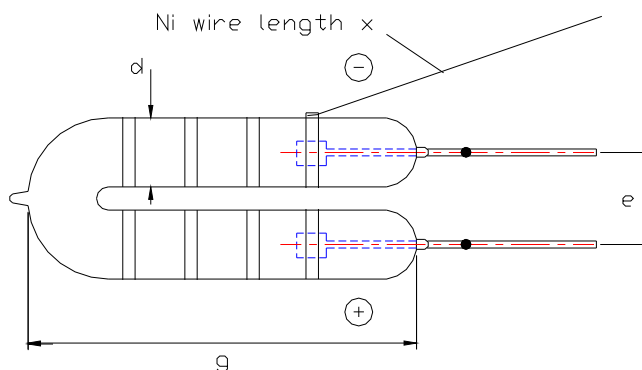

Dimension(mm)

e	15 ± 1.5	l		d	9 ± 0.5 dia
r		g	90 ± 2	x	80 ± 5

Polarity :

Without Colour Corrective Coating :

Remarks:

- Envelope material : Q1, Q2 or Q3

Operating Data :

Max. Power Pmax/W	150	Trigger coil TR	ZS 1052
Nom. Power Pnom / W		Trigger capacitor Cz/μF	0.1
Max. flashenergy Emax/Ws		Min. trigger voltage Uz min/V	300
Nom. flashenergy Enom/Ws		Trigger contact S	TRIAC
Max. anode voltage Uamax/V	1000	Flash frequency/Hz	5 - 300
Nom. anode voltage Uanom/V	900	Life/Number of flashes/N	250 hrs
Min. anode voltage Uamin/V	600	Repetition rate trep/ s	
Nom.flash capacitor CB/ μF	3	Sec trigger voltage Uz sec / KV	- 11.7
Light reduction after life/ %		(Unloaded)	

Remarks :