



Powering Communications and Technology



OBS SERIES 25 WATT

DESCRIPTION

OBS single output DC/DC converters provide up to 25 Watts of output power in an industry standard package and footprint. The OBS units feature excellent efficiency, six-sided shielding, and fixed switching frequency. With 100°C case operation, the OBS converters are especially suited to telecom, networking, and industrial applications. These units are 100% surface-mount construction and fully compatible with production board washing processes.

FEATURES



- Industry standard package • Trim And Enable Pins
- 24 and 48V input versions
- 25W output power
- 100°C baseplate operation • Fixed Frequency
- 1500V Isolation
- 6-Sided Shielding

TECHNICAL SPECIFICATIONS

Input	
Voltage Range	18 - 36 VDC
24 VDC Nominal	34 - 75 VDC
48 VDC Nominal	25 mA
Reflected Ripple	Shunt Diode
Input Reverse Voltage Protection	

Output	
Setpoint Accuracy	±1%
Line Regulation V_{in} Min - V_{in} Max., I_{out} Rated	0.2% V_{out}
Load Regulation I_{out} Min. - I_{out} Max., V_{in} Nom.	0.5% V_{out}
Minimum Output Current	10 % I_{out} Rated
Dynamic Regulation, Loadstep	25% I_{out}
Pk Deviation	4% V_{out}
Settling Time	500 μ s
Voltage Trim Range	±10% I_{out} Rated
Short Circuit / Overcurrent Protection	Hiccup
Current Limit Threshold Range, % of I_{out} Rated	110 - 140%
OVP Trip Range	115 - 140% V_{out} Nom.
OVP	Hiccup

General	
Turn-On Time: 24 & 48V _{in}	10 ms
Remote Shutdown	Positive
Remote Shutdown Reference	V_{in} Negative
Switching Frequency	400 kHz
Isolation	
Input - Output	1500 VDC
Input - Case (24 V _{in} units)	500 VDC
Output - Case (48 V _{in} units)	500 VDC
Temperature Coefficient	0.03%/°C
Case Temperature	
Operating Range	-40 to +100°C
Storage Range	-40 to +125°C
Humidity Max., Non-Condensing	95%
Vibration, 3 Axes, 5 Min Each	5 g, 10 - 55 Hz
MTBF† (Bellcore TR-NWT-000332)	1.8 x 10 ⁶ hrs
Safety	UL, cUL, TUV
Weight (Approx.)	1.9 oz

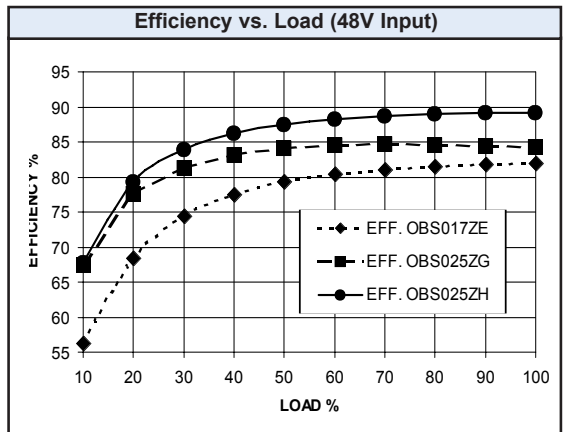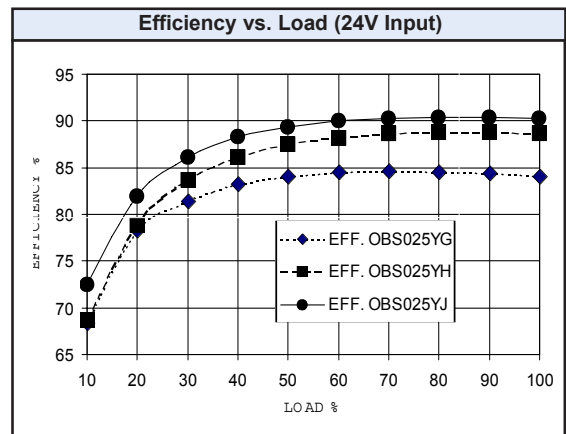

Notes

† MTBF predictions may vary slightly from model to model.

Specifications typically at 25°C, normal line, and full load, unless otherwise stated.

Soldering Conditions: I/O pins, 260°C, ten seconds; fully compatible with commercial wave-soldering equipment.

Units are water-washable and fully compatible with commercial spray or immersion post wave-solder washing equipment.



MODELS - (See the last page of Section for options.)

* Maximum input current at minimum input voltage, maximum rated output power.
** At nominal V_{in} , rated output.

Top View: A rectangle with overall dimensions of 2.00" (50.8mm) by 1.800" (45.7mm). The top edge has a hole with a diameter of 0.040" (1.0mm). The bottom edge has a hole with a diameter of 0.040" (1.0mm). The left edge has a hole with a diameter of 0.040" (1.0mm). The right edge has a hole with a diameter of 0.040" (1.0mm). The top hole is located 0.18" MIN. from the top edge. The bottom hole is located 0.18" MIN. from the bottom edge. The left hole is located 0.18" MIN. from the left edge. The right hole is located 0.18" MIN. from the right edge.

Bottom View: A rectangle with overall dimensions of 2.00" (50.8mm) by 1.800" (45.7mm). The top edge has a hole with a diameter of 0.040" (1.0mm). The bottom edge has a hole with a diameter of 0.040" (1.0mm). The left edge has a hole with a diameter of 0.040" (1.0mm). The right edge has a hole with a diameter of 0.040" (1.0mm). The top hole is located 0.18" MIN. from the top edge. The bottom hole is located 0.18" MIN. from the bottom edge. The left hole is located 0.18" MIN. from the left edge. The right hole is located 0.18" MIN. from the right edge.

Side View: A rectangle with overall dimensions of 2.00" (50.8mm) by 1.800" (45.7mm). The top edge has a hole with a diameter of 0.040" (1.0mm). The bottom edge has a hole with a diameter of 0.040" (1.0mm). The left edge has a hole with a diameter of 0.040" (1.0mm). The right edge has a hole with a diameter of 0.040" (1.0mm). The top hole is located 0.18" MIN. from the top edge. The bottom hole is located 0.18" MIN. from the bottom edge. The left hole is located 0.18" MIN. from the left edge. The right hole is located 0.18" MIN. from the right edge.

Pin	Function
1	+V _{in}
2	-V _{in}
3	No Conn.
4	Enable
5	No Pin
6	+V _{out}
7	-V _{out}
8	Trim

Tolerances	
Inches:	(Millimeters)
.XX \pm 0.020	.X \pm 0.5
.XXX \pm 0.010	.XX \pm 0.25
Pin:	
\pm 0.002	\pm 0.05
Case:	
+ 0.04, - 0.00	+ 1.0, - 0.00
(Dimensions as listed unless otherwise specified.)	



OPTIONS

Powering Communications and Technology

When ordering equipment options, use the following suffix information. Select the option(s) that you prefer and add them to the model number. Example ordering options are located below the options table.

OPTIONS	SUFFIX	APPLICABLE SERIES	REMARKS
Negative Logic	N	HAS, HBD, HBS, HES, HLS, LES, QBS, QES, QLS, TES, TQD	TTL "Low" Turns Module ON TTL "High" Turns Module OFF
Lucent Compatible Trim	T	HAS, HBD, HBS, HES, HLS, QBS, QES, QLS	
Terminal Strip	TS	XWS, XWD, XWT	
Trim	1	IAS, LES	
Enable	2	IAD, IAS, LES, SMS	
Trim and Enable	3	IAS, LES	
Current Share	4	SMS	
Headerless	Y	Encapsulated EWS, IWS, OWS	
PIN LENGTH AND HEATSINK OPTIONS			Standard Pin Length is 0.180" (4.6mm)
0.110" (2.8mm) Pin Length	8	All Units (Except SMS)	
0.150" (3.8mm) Pin Length	9	All Units (Except SMS)	
0.24" (6.1mm) Horizontal Heatsink	1H	All Units (Except DIP, HLS, HLD, QLS, SIP, SM TLD, and TKD Packages)	Includes Thermal Pad
0.24" (6.1mm) Vertical Heatsink	1V	All Units (Except DIP, HLS, HLD, QLS, SIP, SM TLD, and TKD Packages)	Includes Thermal Pad
0.45" (11.4mm) Horizontal Heatsink	2H	All Units (Except DIP, HLS, HLD, QLS, SIP, SM TLD, and TKD Packages)	Includes Thermal Pad
0.45" (11.4mm) Vertical Heatsink	2V	All Units (Except DIP, HLS, HLD, QLS, SIP, SM TLD, and TKD Packages)	Includes Thermal Pad
0.95" (24.1mm) Horizontal Heatsink	3H	All Units (Except DIP, HLS, HLD, QLS, SIP, SM TLD, and TKD Packages)	Includes Thermal Pad
0.95" (24.1mm) Vertical Heatsink	3V	All Units (Except DIP, HLS, HLD, QLS, SIP, SM TLD, and TKD Packages)	Includes Thermal Pad

Example Options:

HBS050ZG-ANT3V = HBS050ZG-A with negative logic, Lucent compatible trim, and 0.95" vertical heatsink.

LES015YJ-3N = LES015YJ with optional trim and enable, negative logic.

QBS066ZG-AT8 = QBS066ZG-A with Lucent compatible trim and 0.110" pin length.

NUCLEAR AND MEDICAL APPLICATIONS - Power-One products are not authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the President of Power-One, Inc.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.