




T-25-19

CR400EL


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272
 Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

Phase Control SCR
400 Amperes Avg
200-1200 Volts

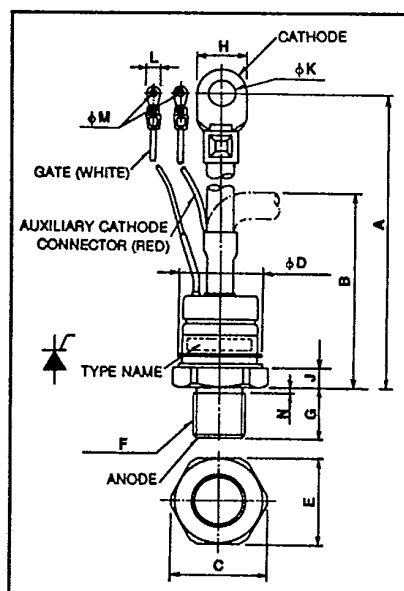

CR400EL
Outline Drawing

Dimensions	Inches	Metric
A	9.06 ± .30	230 ± 8
B	4.53 Max	115 Max
C	1.77	45
φD	1.614 Max	41 Max
E	1.62	41
F	M24	M24 × 1.5
G	.95	24
H	.87	22
J	.43	11
φK	.413	10.5
L	.32	8
φM	.173	4.4
N	.13	3.3

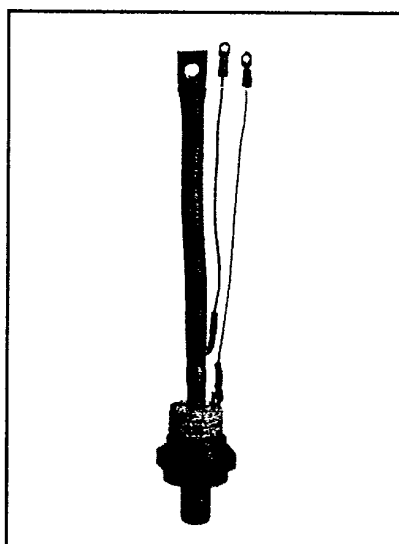

CR400EL
Phase Control SCR
400 Amperes/200-1200 Volts

Description

Powerex Silicon Controlled Rectifiers (SCR) are designed for phase control applications. These are all-diffused, compression bonded encapsulated (CBE) devices employing the field-proven amplifying (di/namic) gate.

Features:

- ☐ Low On-State Voltage
- ☐ High di/dt
- ☐ High dv/dt
- ☐ Hermetic Packaging
- ☐ Excellent Surge and I²t Ratings

Applications:

- ☐ Power Supplies
- ☐ Battery Chargers
- ☐ Motor Control
- ☐ Light Dimmers
- ☐ VAR Generators

Ordering Information

Example: Select the complete eight or nine digit part number you desire from the table – i.e. CR400EL-12 is a 600 Volt, 400 Ampere Phase Control SCR.

Type	Voltage		Current
	V _{ORM} V _{RRM}	Code	I _T (avg)
CR400EL	200	-4	400
	300	-6	
	400	-8	
	500	-10	
	600	-12	
	800	-16	
	1000	-20	
	1200	-24	



T-25-19

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

CR400EL**Phase Control SCR**

400 Amperes Avg/200-1200 Volts

Absolute Maximum Ratings

	Symbol	CR400EL	Units
RMS On-State Current	$I_{T(RMS)}$	630	Amperes
Average On-State Current	$I_{T(av)}$	400	Amperes
Peak One-Cycle Surge (Non Repetitive) On-State Current (60Hz)	I_{TSM}	8000	Amperes
Peak One-Cycle Surge (Non-Repetitive) On-State Current (50Hz)	I_{TSM}	7300	Amperes
Critical Rate-of-Rise of On-State Current (Non-Repetitive)	di/dt	500	Amperes/ μs
Critical Rate-of-Rise of On-State Current (Repetitive)	di/dt	200	Amperes/ μs
I^2t (for Fusing), one cycle at 60Hz	I^2t	2.7×10^5	A ² sec
Peak Gate Power Dissipation	P_{GM}	10	Watts
Average Gate Power Dissipation	$P_{G(av)}$	3	Watts
Storage Temperature	T_{STG}	-40 to 150	°C
Operating Temperature	T_J	-40 to 125	°C
Mounting Torque ^①		390 to 520	in.-lb.
Mounting Torque ^①		450 to 600	kg-cm

Electrical and Thermal Characteristics

Characteristics	Symbol	Test Conditions	CR400EL	Units
Voltage—Blocking State Maximums				
Forward Leakage, Peak	I_{DRM}	$T_J = 125^\circ C, V_{DRM}$ applied	30	mA
Reverse Leakage, Peak	I_{RRM}	$T_J = 125^\circ C, V_{RRM}$ applied	30	mA
Current—Conducting State Maximums				
Peak On-State Voltage	V_{TM}	$T_J = 125^\circ C, I_{TM} = 1250A$	1.70	Volts
Switching				
Min. Critical dv/dt exponential to V_{DRM}	dv/dt	$T_J = 125^\circ C, V_D = 1/2 V_{DRM}$	200	V/ μsec
Thermal				
Maximum Thermal Resistance ^①				
Junction to Case	$R_{\theta JC}$.09	°C/Watt
Case to Sink, Lubricated	$R_{\theta CS}$.04	°C/Watt
Gate—Maximum Parameters				
Gate Current to Trigger	I_{GT}	$T_J = 25^\circ C, V_D = 6V, R_L = 2\Omega$	200	mA
Gate Voltage to Trigger	V_{GT}	$T_J = 25^\circ C, V_D = 6V, R_L = 2\Omega$	2.5	Volts
Non-Triggering Gate Voltage	V_{GDM}	$T_J = 125^\circ C, V_D = 1/2 V_{DRM}$.20	Volts
Peak Forward Gate Current	I_{GTM}		4.0	Amperes
Peak Reverse Gate Voltage	V_{GRM}		4.0	Volts

① Consult recommended mounting procedures.



T-25-19







Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

CR400EL

Phase Control SCR

400 Amperes Avg/200-1200 Volts

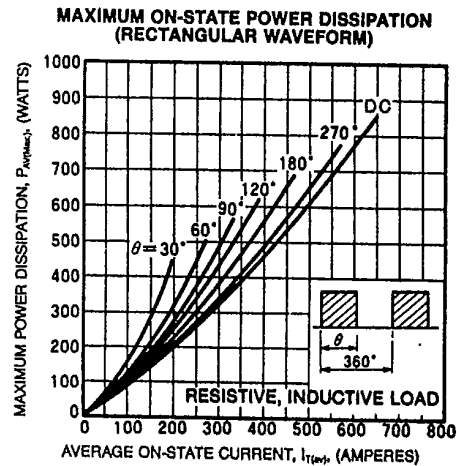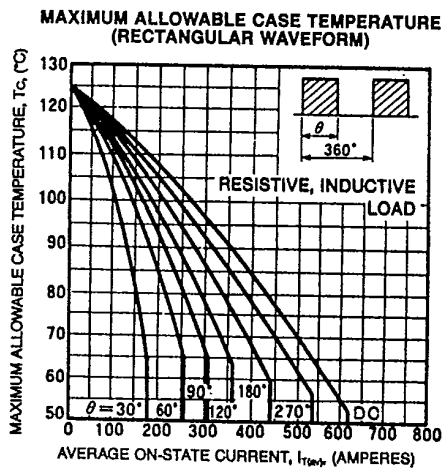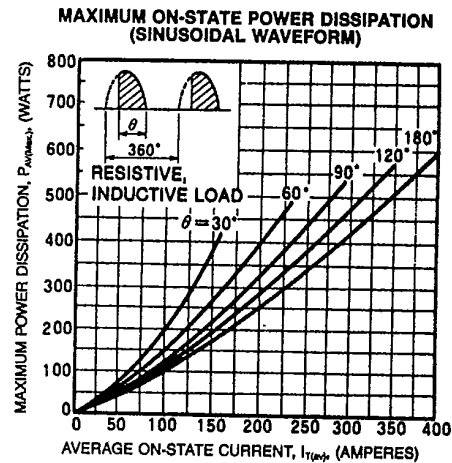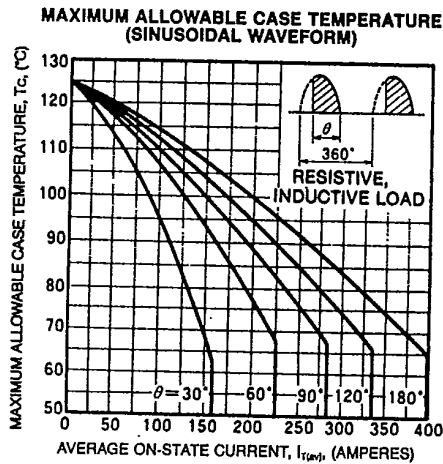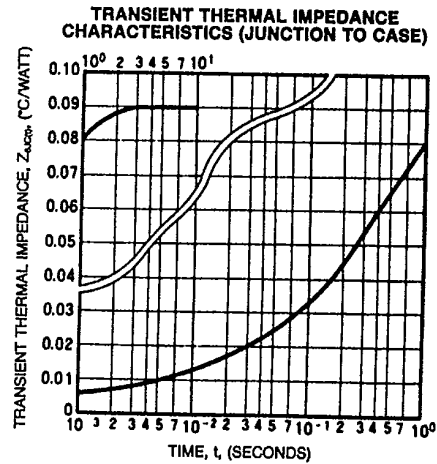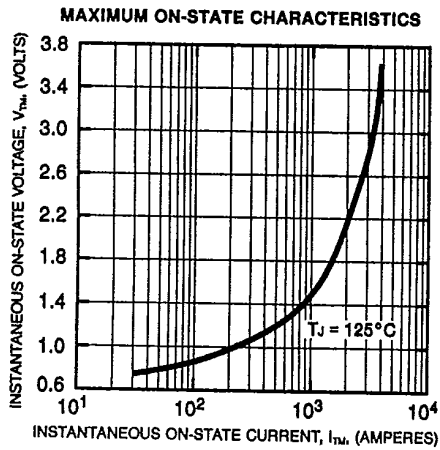



T-25-19

Powerex, Inc., Hills Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex Europe, S.A., 428 Ave. G. Durand, BP107, 72003 LeMans, France (43) 72.75.15

CR400EL

Phase Control SCR

400 Amperes Avg/200-1200 Volts

