

POWERLINE - DC/DC-Converter

M-Series, 20 Watt, Surface-Mount (Single Output)



RECOM

Features

- Output Voltage Adjustment
- Output Overvoltage Protection
- High Efficiency to 88%
- Max. Operat. Temperature: 85°C
- Five-Sided Shield
- Undervoltage Lockout
- Remote On/Off Control
- Over Current Protection, unlimited Duration




Selection Guide

Part Number	Input Range (VDC)	Output Range (VDC)	Output Current (A)	Ripple & Noise (mVp-p)	Max. Capacitor Load (µF)	Efficiency (%)
RP20-4820SM	36-75	2.0	4.00	50	1500	82
RP20-4833SM	36-75	3.3	4.00	50	1500	84
RP20-4805SM	36-75	5.0	4.00	75	1500	88
RP20-4812SM	36-75	12.0	1.67	75	330	88
RP20-4815SM	36-75	15.0	1.33	75	330	88

Specifications (typical at nominal input and 25°C unless otherwise noted)

Input Voltage Range 48V Nominal		36-75VDC
Input Filter		LC Type
Output Voltage Set-Point Accuracy		±1%
Ripple and Noise (20MHz BW)		See table above
Line Regulation, HL-LL		±0.2%
Load Regulation (100% to 10% full load)		±0.5%
External Trim Adjustment Range		±10% typ.
Efficiency		See Table
Temperature Coefficient		±0.02%/°C
Short Circuit Protection		Continuous, auto recovery
Transient Response Recovery Time (25% load step change)		500µ s
Transient Voltage Peak Deviation		300mV, max.
Control Voltage (referenced to negative (-) input)	Compatibility On-Control Off-control	CMOS, TTL 4.8V min. or open 0.4V max. or short
Switching Frequency		300kHz, typ.
Isolation Voltage		1600VDC min.
Isolation Resistance		10 ⁹ Ω min.
Operating Temperature Range		-25°C to +71°C +85°C (see Graph)
Case Temperature		100°C max.
Storage Temperature Range		-55°C to +105°C
Cooling		Free-air convection
EMI / RFI		Five-sided shield
Case Material		Non-conductive black plastic
Dimensions		49.5 x 30.2 x 10 mm

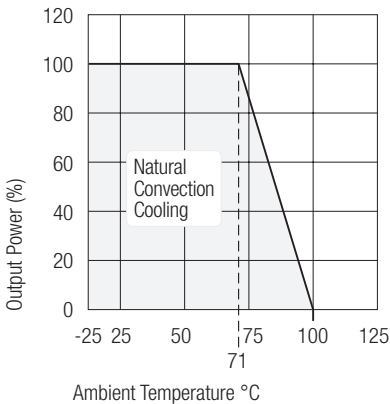





POWERLINE - DC/DC-Converter

M-Series, 20 Watt, Surface-Mount (Single Output)




RECOM

Package Style and Pinning (mm)

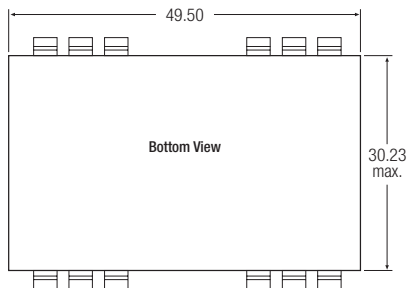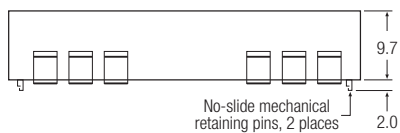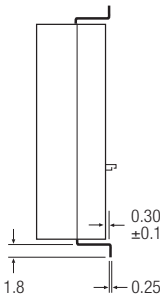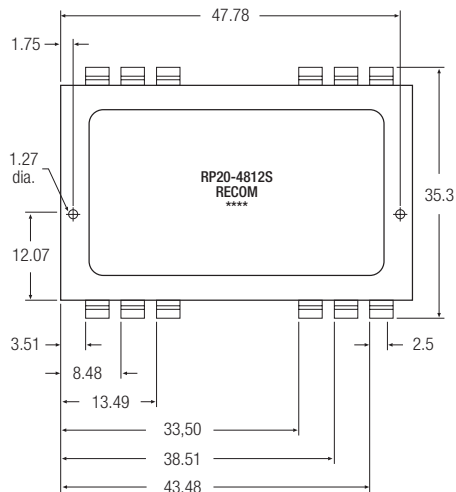

Recommended Footprint Details

Caution: Care must be taken to ensure the board in the periphery of the footprint is flat.

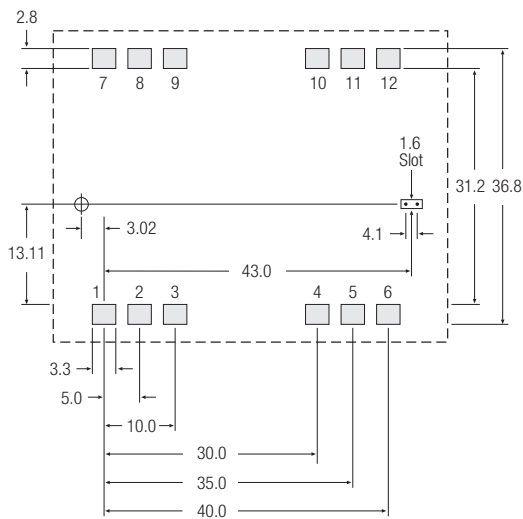

Pin Connections

Pin #	Function	Pin #	Function
1	Vo(+)	7	Turn-On Adjustment (optional)
2	Vo(-)	8	On/Off
3	N/C+	9	Sync (optional)
4	Trim	10	N/C+
5	N/C+	11	V1(-)
6	N/C+	12	V1(+)

Pin Pitch Tolerances: x.x ± 0.6 mm, x.xx ± 0.4 mm