

## Features

- 2:1 Wide Input Voltage Range
- 40 Watts Output Power
- 1.6kVDC Isolation
- Fixed Operating Frequency
- Six-Sided Continuous Shield
- Design Meet Safety Standard
- International Safety Standard Approvals
- Standard 50.8 x50.8x10.2mm Package
- Efficiency to 90%

**POWERLINE**  
DC/DC-Converter


## RP40-S\_D\_TG Series

### Selection Guide 12V, 24V and 48V Input Types

Part Number	Input Range	Output Voltage	Output Current	Input <sup>(4)</sup> Current	Efficiency <sup>(5)</sup>	Capacitive <sup>(6)</sup> Load max.
	VDC	VDC	mA	mA	%	μF
RP40-121.5SG	9-18	1.5	8000	1351	78	45000
RP40-121.8SG	9-18	1.8	8000	1579	80	37700
RP40-122.5SG	9-18	2.5	8000	2137	82	27000
RP40-123.3SG	9-18	3.3	8000	2750	84	21000
RP40-1205SG	9-18	5	8000	4065	86	13600
RP40-1212SG	9-18	12	3333	4065	86	2360
RP40-1215SG	9-18	15	2666	4015	87	1510
RP40-241.5SG	18-36	1.5	8000	649	81	45000
RP40-241.8SG	18-36	1.8	8000	759	83	37700
RP40-242.5SG	18-36	2.5	8000	1029	85	27000
RP40-243.3SG	18-36	3.3	8000	1325	87	21000
RP40-2405SG	18-36	5	8000	1961	89	13600
RP40-2412SG	18-36	12	3333	2048	88	2360
RP40-2415SG	18-36	15	2666	1985	89	1510
RP40-481.5SG	36-75	1.5	8000	321	82	45000
RP40-481.8SG	36-75	1.8	8000	375	84	37700
RP40-482.5SG	36-75	2.5	8000	508	86	27000
RP40-483.3SG	36-75	3.3	8000	655	88	21000
RP40-4805SG	36-75	5	8000	969	90	13600
RP40-4812SG	36-75	12	3333	1000	89	2360
RP40-4815SG	36-75	15	2666	992	89	1510
RP40-1212DG	9-18	±12	±1800	4444	85	±1200
RP40-1215DG	9-18	±15	±1400	4321	85	±750
RP40-2412DG	18-36	±12	±1800	2169	87	±1200
RP40-2415DG	18-36	±15	±1400	2108	87	±750
RP40-4812DG	36-75	±12	±1800	1084	87	±1200
RP40-4815DG	36-75	±15	±1400	1054	87	±750

for Triple Output continued on next page

**40 Watt  
Single, Dual,  
Positive Dual &  
Triple Output**

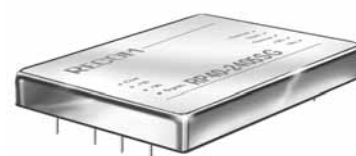

**RECOM**

### Description


The RP40-xxxxG Series of DC/DC Converters are fully certified to EN 60950: 2000. This makes them ideal for all Telecom and safety applications where approved isolation is required. They also meet UL 1950 and CSA 950 standards.

## Selection Guide 12V, 24V and 48V Input Types

Part Number	Input Range	Output Voltage	Output Current	Input <sup>(4)</sup> Current	Efficiency <sup>(5)</sup>	Capacitive <sup>(6)</sup> Load max.
	VDC	VDC	mA	mA	%	μF
RP40-123.305DG	9-18	3.3 / 5	4A / 4A (total 8A) <sup>(12)</sup>	3416	85	11000 / 6800
RP40-243.305DG	18-36	3.3 / 5	4A / 4A (total 8A) <sup>(12)</sup>	1689	86	11000 / 6800
RP40-483.305DG	36-75	3.3 / 5	4A / 4A (total 8A) <sup>(12)</sup>	823	88	11000 / 6800
RP40-123.312TG	9-18	3.3 / ±12	6000 / ±400	3063	84	13000 / ±330
RP40-123.315TG	9-18	3.3 / ±15	6000 / ±300	3000	84	13000 / ±110
RP40-120512TG	9-18	5 / ±12	6000 / ±400	4024	86	6800 / ±330
RP40-120515TG	9-18	5 / ±15	6000 / ±300	3963	86	6800 / ±110
RP40-243.312TG	18-36	3.3 / ±12	6000 / ±400	1512	85	13000 / ±330
RP40-243.315TG	18-36	3.3 / ±15	6000 / ±300	1481	85	13000 / ±110
RP40-240512TG	18-36	5 / ±12	6000 / ±400	1989	87	6800 / ±330
RP40-240515TG	18-36	5 / ±15	6000 / ±300	1958	87	6800 / ±110
RP40-483.312TG	36-75	3.3 / ±12	6000 / ±400	747	86	13000 / ±330
RP40-483.315TG	36-75	3.3 / ±15	6000 / ±300	732	86	13000 / ±110
RP40-480512TG	36-75	5 / ±12	6000 / ±400	982	88	6800 / ±330
RP40-480515TG	36-75	5 / ±15	6000 / ±300	967	88	6800 / ±110

## Derating-Graph (Ambient Temperature)

### RP40-4805SG

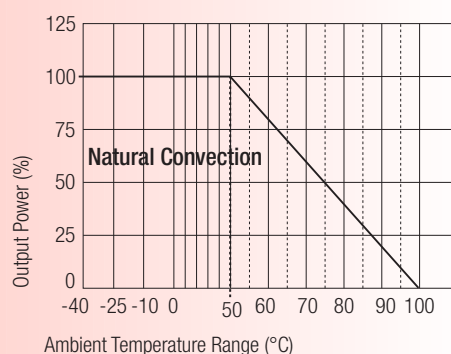


Derating graphs are valid only for the shown part numbers. If you need detailed derating-information about a part-number not shown here please contact our technical customer service at [info@recom-development.at](mailto:info@recom-development.at)

## Typical Characteristics


### RP40-4805SG

Efficiency VS Input Voltage

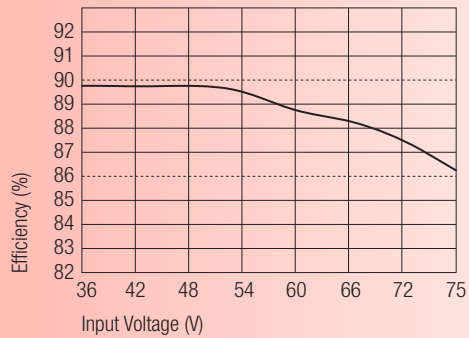

### RP40-4805SG

Efficiency VS Output Load

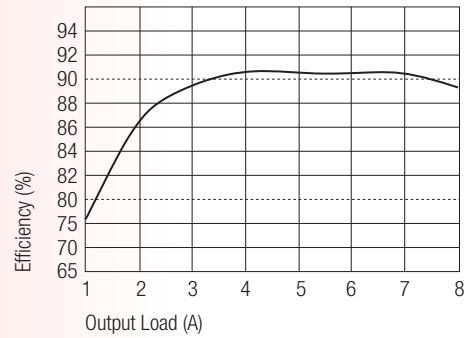

## Specifications (typical at nominal input and 25°C unless otherwise noted)

Input Voltage Range	12V nominal input	9-18VDC
	24V nominal input	18-36VDC
	48V nominal input	36-75VDC
Under Voltage Lockout	12V input	DC-DC ON 9VDC
		DC-DC OFF 8VDC
	24V input	DC-DC ON 17.8VDC
		DC-DC OFF 16VDC
	48V input	DC-DC ON 36VDC
		DC-DC OFF 34VDC
Input Filter (see note 1)	L-C Type	
Input Voltage Variation dv/dt	(Complies with ETS300 132 part 4.4)	5V/ms max
Input Surge Voltage (100 ms max.)	12V Input	36VDC
	24V Input	50VDC
	48V Input	100VDC
Input Reflected Ripple (nominal Vin and full load see note 3)	40mA <sub>p-p</sub>	
Start Up Time (nominal Vin and constant resistor load)	25ms typ.	
Remote ON/OFF (see note 7)	DC-DC ON	Open or 3.5V < Vr < 12V
	DC-DC OFF	Short or 0V < Vr < 1.2V
Remote OFF input current	Nominal input	2.5mA
Output Power	40W max.	
Output Voltage Accuracy (full Load and nominal Vin)	Single & Dual	±1%
	Triple Main	±1%
	Auxiliary	±5%
Voltage Adjustability	±10%	
Minimum Load	Single and Dual Positive	0%
	Dual and Triple	10% of FL
Line Regulation (LL-HL at full load)	Single & Dual	±0.5%
	Triple Main	±1%
	Triple Auxiliary	±5%

continued on next page

**Specifications** (typical at nominal input and 25°C unless otherwise noted)

Load Regulation (10% to 100% FL see note 9 and 10)	Single Dual Triple Main Auxiliary	±0.5% ±1% ±2% ±5%
Cross Regulation (Note 11)	Triple Main Dual / Triple Auxiliary	±1% ±5%
Ripple and Noise (20MHz bandwidth) (Measured with a 1004pF/50V MLCC)	Single 1.5, 1.8, 2.5, 3.3, 5V Single 12, 15V Dual 12V Dual 15V RP40-xx3.305DG RP40-xxxxxTG	50mVp-p 75mVp-p 120mVp-p 150mVp-p 100mVp-p 50 / 75mVp-p
Temperature Coefficient		±0.02%/°C, max.
Transient Response (25% load step change)		300µS
Over Voltage Protection	1.5, 1.8, 2.5, 3.3V	3.9V
Zener diode clamp (only single)	5V 12V 15V	6.2V 15V 18V
Over Load Protection (% of full load at nominal Vin)		150% max.
Short Circuit Protection		Hiccup, automatic recovery
Efficiency		see „Selection Guide“ table
Isolation Voltage		1.600VDC min.
Isolation Resistance		10 <sup>9</sup> Ω min.
Isolation Capacitance		1000pF max.
Operating Frequency		300kHz typ.
Approved to Safety Standards	Single, Triple Dual	UL 1950, EN60950 EN60950
Operating Temperature Range		-40°C to +85°C(with derating)
Maximum Case Temperature		100°C
Storage Temperature Range		-55°C to +105°C
Thermal Impedance (see note 8)	Natural convection Heat Sink with 20LFM Heat Sink with 500LFM	9.2°C/Watt 8.5°C/Watt 2.8°C/Watt
Thermal Shock		MIL-STD-810D
Vibration		10-55Hz, 2G, 30 Min. along X, Y and Z
Relative Humidity		5% to 95% RH
Case Material		Nickel-Coated copper
Base Material		Non-conductive black plastic FR4
Potting Material		Epoxy (UL94-V0)
Conducted Emissions	EN55022	Level A
Radiated Emissions	EN55022	Level A
ESD	EN61000-4-2	Perf. Criteria 2
Radiated Immunity	EN61000-4-3	Perf. Criteria 2
Fast Transient	EN61000-4-4	Perf. Criteria 2
Surge	EN61000-4-5	Perf. Criteria 2
Conducted Immunity	EN61000-4-6	Perf. Criteria 2
Weight		60g
Dimensions		50.8 x 50.8 x 10.2mm
MTBF (see note 2)		1.398 x 10 <sup>6</sup> Hours

## Notes :

- Maximum output deviation is 10% inclusive of remote sense and trim. If remote sense is not being used, the +Vsense should be connected to its corresponding +OUTPUT and likewise the sense should be connected to its corresponding -OUTPUT
- BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40°C (Ground fixed and controlled environment).
- Simulated source impedance of 12uH. 12uH inductor in series with +Vin.
- Maximum value at nominal input voltage and full load of standard type.
- Typical value at nominal input voltage and full load.
- Test by minimum Vin and constant resistor load.
- The ON/OFF control pin voltage is referenced to negative input.
- Heat sink is optional and P/N: 7G-0026A.
- The triple output required a minimum 10% loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specification.
- Load regulation for triple output: Main output(V1):10 to 100% with 10% to 100% balanced on auxiliaries.  
Auxiliary outputs(V2 and V3):10% to 100% balanced on all outputs.
- Cross regulation for triple output: Main output 100% load, auxiliary 100%, other auxiliary 25% to 100%.  
Auxiliary outputs(V2 and V3):main output 100% load, auxiliary 100%, other auxiliary 25% to 100% or main output 25%, auxiliary 25%, other auxiliary 25% to 100%.
- The models of RP40-XX3.305DG are specified with a 1uF ceramic output capacitors.
- An external filter capacitor is required for normal operation. The capacitor should be capable of handling 1A ripple current for 48V/24V models.  
RECOM suggest: Nippon chemi-con KMF series, 220µF/100V, ESR 90m Ω.
- Operating frequency for dual output: master (5Vo) 300KHz slave (3.3Vo) 500KHz.
- Any condition of dual output (3.3V/5V) rated lout current, not to exceed 8A of total output currents. The product safety approval pending.
- See application notes for EMI-filtering.

## Package Style and Pinning (mm)

