

High efficiency, single-digit numeric displays


LA-501DN Series

The LA-501DN series were designed to meet the need for 13mm single-digit numeric displays. These LED numeric displays use GaAsP on GaP for the emitting material (with the exception of green) and are housed in an epoxy resin package. They are single-digit displays with a character height of 13.0mm.

●Features

- 1) Height of character: 13.0mm
- 2) Common anode and common cathode configurations are available for each color.
- 3) High-efficiency reflectors are used to achieve a bright, clear display.
- 4) The package surface is painted black and the segments are colored the display color.

●External dimensions (Units : mm)

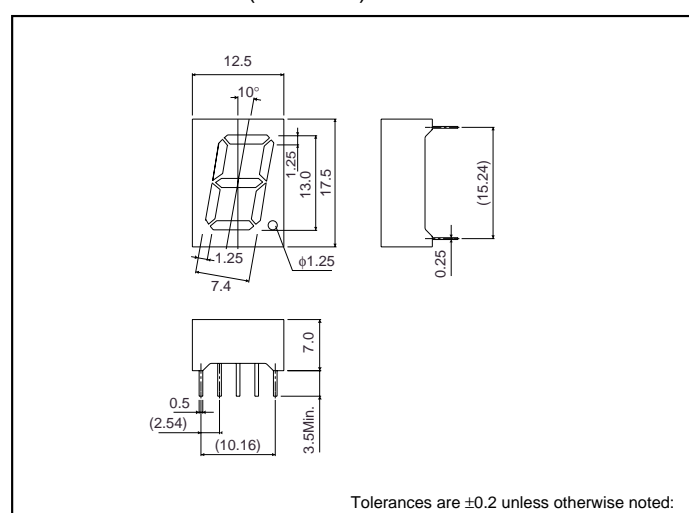


●Selection guide

| Emitting color | Red | Orange | Green |
|----------------|----------|-----------|----------|
| Common | | | |
| Anode | LA-501VD | LA-501DD* | LA-501MD |
| Cathode | LA-501VN | LA-501DN* | LA-501MN |

* Order-based production.


●Pin assignments



| Pin No. | Function |
|---------|-------------|
| 1 | Segment "e" |
| 2 | Segment "d" |
| 3 | Common |
| 4 | Segment "c" |
| 5 | D.P. |
| 6 | Segment "b" |
| 7 | Segment "a" |
| 8 | Common |
| 9 | Segment "f" |
| 10 | Segment "g" |

LED displays

● Internal circuit schematic (example of common cathode)



● Absolute maximum ratings (Ta = 25°C)

| Parameter | Symbol | Red | Orange | Green | Unit |
|-----------------------|----------------------|---------------|---------------|---------------|------|
| | | LA-501VD / VN | LA-501DD / DN | LA-501MD / MN | |
| Power dissipation | P _D | 480 | 480 | 480 | mW |
| Power dissipation | P _D / seg | 60 | 60 | 60 | mW |
| Forward current | I _F | 20 | 20 | 20 | mA |
| Peak forward current | I _{FP} | 60* | 60* | 60* | mA |
| Reverse voltage | V _R | 5 | 5 | 5 | V |
| Operating temperature | T _{opr} | -25~+75 | | | °C |
| Storage temperature | T _{stg} | -30~+85 | | | °C |

* Pulse width 1ms duty 1 / 5

● Electrical and optical characteristics (Ta = 25°C)

| Parameter | Symbol | Conditions | Red | | | Orange | | | Green | | | Unit |
|--------------------------|----------------|-----------------------|------|------|------|--------|------|------|-------|------|------|------|
| | | | Min. | Typ. | Max. | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| Forward voltage | V _F | I _F = 10mA | – | 2.0 | 2.8 | – | 2.0 | 2.8 | – | 2.1 | 2.8 | V |
| Reverse current | I _R | V _R = 5V | – | – | 100 | – | – | 100 | – | – | 100 | μA |
| Peak wavelength | λ _P | I _F = 10mA | – | 650 | – | – | 610 | – | – | 563 | – | nm |
| Spectral line half width | Δλ | I _F = 10mA | – | 40 | – | – | 40 | – | – | 40 | – | nm |

© Not designed for radiation resistance.

● Luminous intensity

| Color | λ _P | Type | Min. | Typ. | Max. | Unit |
|--------|----------------|----------|------|------|------|------|
| Red | 650 | LA-501VD | 5.6 | 16 | – | mcd |
| | | LA-501VN | | | | |
| Orange | 610 | LA-501DD | 5.6 | 16 | – | mcd |
| | | LA-501DN | | | | |
| Green | 563 | LA-501MD | 5.6 | 16 | – | mcd |
| | | LA-501MN | | | | |

Note : Measured at I_F = 10 mA