


High efficiency, single-digit numeric displays

LA-601BL Series

The LA-601BL series are LED numeric displays designed to be used in bright locations. Red, orange, and green are available, and they are suitable for use in a wide range of applications.

●Features

- 1) Height of display: 14.6 mm.
- 2) Dimensions: 12.5 x 19 x 8 mm
- 3) Common anode and common cathode configurations are available for each color.
- 4) High efficiency reflectors are used to achieve a bright, clear display.
- 5) The package surface is painted black and the segments are colored the display color.

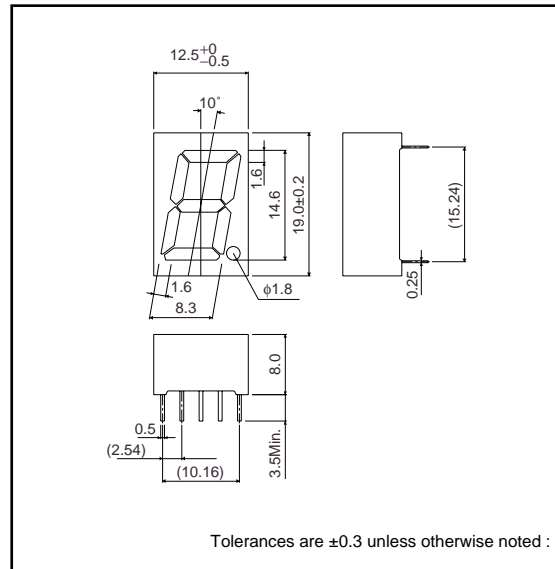


●External Dimensions (Units: mm)

●Selection guide

Emitting color	Red	Orange	Green
Common			
Anode	LA-601VB	LA-601DB *	LA-601MB
Cathode	LA-601VL	LA-601DL *	LA-601ML

* Order-based production.


●Pin assignments



Pin No.	Function
1	Segment "e"
2	Segment "d"
3	Common
4	Segment "c"
5	D.P
6	Segment "b"
7	Segment "a"
8	Common
9	Segment "f"
10	Segment "g"

LED displays

●Internal circuit schematic (example of common cathode)



●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Red	Orange	Green	Unit
		LA-601VB / VL	LA-601DB / DL	LA-601MB / ML	
Power dissipation	P _D	480	480	480	mW
Power dissipation	P _D / seg	60	60	60	mW
Forward current	I _F	20	20	20	mA
Peak forward current	I _{FP}	60*	60*	60*	mA
Reverse voltage	V _R	5	5	5	V
Operating temperature	T _{opr}	-25~+75			°C
Storage temperature	T _{stg}	-30~+85			°C

* Pulse width 1ms duty 1 / 5

●Electrical and optical characteristics (Ta=25°C)

Parameter	Symbol	Conditions	Red			Orange			Green			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
Forward voltage	V _F	I _F =10mA	—	2.0	2.8	—	2.0	2.8	—	2.1	2.8	V
Reverse current	I _R	V _R =3V	—	—	100	—	—	100	—	—	100	μA
Peak wavelength	λ _P	I _F =10mA	—	650	—	—	610	—	—	563	—	nm
Spectral line half width	Δλ	I _F =10mA	—	40	—	—	40	—	—	40	—	nm

© Not designed for radiation resistance.

●Luminous intensity

Color	λ _P	Type	Min.	Typ.	Max.	Unit
Red	650	LA-601VB	5.6	10	—	mcd
		LA-601VL				
Orange	610	LA-601DB	3.6	10	—	mcd
		LA-601DL				
Green	563	LA-601MB	5.6	16	—	mcd
		LA-601ML				

Note : Measured at I_F=10mA