


LA-801FP Series

●Features


●**External dimensions** (Units : mm)

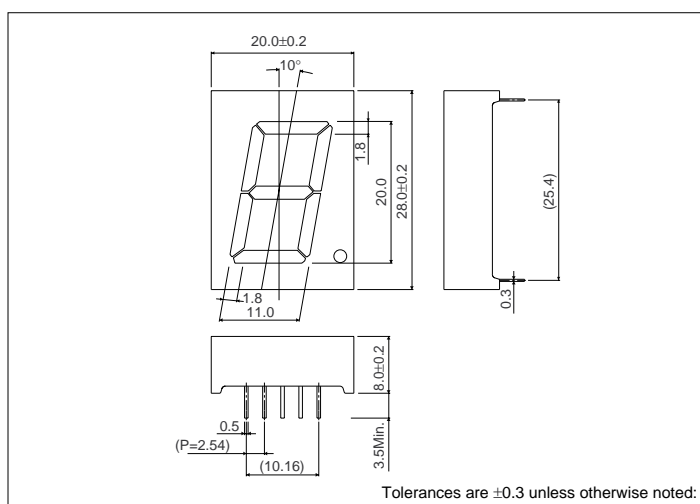

● Selection guide

Emitting color	Red	Green
Common		
Anode	LA-801VF	LA-801MF
Cathode	LA-801VP	LA-801MP


- Pin assignments



Pin No.	Function
1	Segment "e"
2	Segment "d"
3	Common
4	Segment "c"
5	D.P
6	Segment "b"
7	Segment "a"
8	Common
9	Segment "f"
10	Segment "a"

LED displays

● Internal circuit schematic (example of common cathode)



● Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Red	Green	Unit
		LA-801VF / VP	LA-801MF / MP	
Power dissipation	P _D	480	480	mW
Power dissipation	P _D / seg	60	60	mW
Forward current	I _F	20	20	mA
Peak forward current	I _{FP}	60*	60*	mA
Reverse voltage	V _R	5	5	V
Operating temperature	T _{opr}	-25~+75		°C
Storage temperature	T _{stg}	-30~+85		°C

* Pulse width 1ms duty 1 / 5

● Electrical and optical characteristics (Ta = 25°C)

Parameter	Symbol	Conditions	Red			Green			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Forward voltage	V _F	I _F = 10mA	—	2.0	2.8	—	2.1	2.8	V
Reverse current	I _R	V _R = 3V	—	—	100	—	—	100	μA
Peak wavelength	λ _P	I _F = 10mA	—	650	—	—	563	—	nm
Spectral line half width	Δλ	I _F = 10mA	—	40	—	—	40	—	nm

© Not designed for radiation resistance.

● Luminous intensity

Color	λ _P	Type	Min.	Typ.	Max.	Unit
Red	650	LA-801VF	3.6	10	—	mcd
		LA-801VP				
Green	563	LA-801MF	3.6	10	—	mcd
		LA-801MP				

Note : Measured at I_F = 10mA