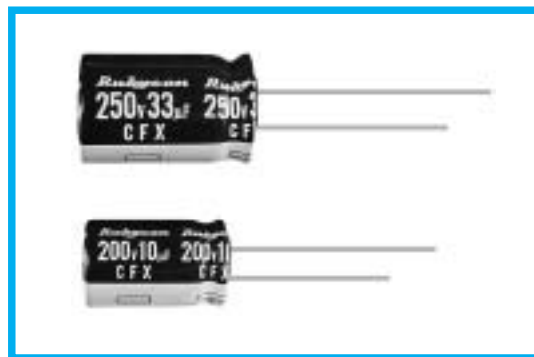


**CFX SERIES**
**Load Life: 105°C 5000 Hours.**
**◆FEATURES**

- High Ripple Current
- For Electronic Ballast, Power Supply
- RoHS compliance.


**◆SPECIFICATIONS**

Items	Characteristics				
Category Temperature Range	-25~+105℃				
Rated Voltage Range	200~400V.DC				
Capacitance Tolerance	±20% (20℃, 120Hz)				
Leakage Current(MAX)	CV≤1000		CV>1000		I=Leakage Current( μ A) C=Rated Capacitance( μ F) V=Rated Voltage(V)
	I=0.1CV+40μA ( 1 minute)		I=0.04CV+100μA ( 1 minute)		
	I=0.03CV+15μA ( 5 minute)		I=0.02CV+25μA ( 5 minute)		
Dissipation Factor(MAX) (tan δ )	(20℃, 120Hz)				
	Rated Voltage (V)	200	250	350	400
	tan δ	0.15	0.15	0.20	0.20
Endurance	After applying rated voltage with rated ripple current for 5000 hrs at 105℃, the capacitors shall meet the following requirements.				
	Capacitance Change		Within ±20% of the initial value.		
	Dissipation Factor		Not more than 200% of the specified value.		
	Leakage Current		Not more than the specified value.		
Low Temperature Stability Impedance Ratio(MAX)	(120Hz)				
	Rated Voltage (V)	200	250	350	400
	Z(-25℃)/Z(20℃)	3	3	6	6

**◆MULTIPLIER FOR RIPPLE CURRENT**

Frequency coefficient


Frequency (Hz)		120	1k	10k	≥100k
Coefficient	2.2~4.7 μ F	0.2	0.4	0.8	1.0
	6.8~10 μ F	0.3	0.6	0.9	1.0
	22~100 μ F	0.5	0.8	0.9	1.0

**◆PART NUMBER**

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Rated Voltage	CFX	Rated Capacitance	Capacitance Tolerance	Option	Lead Forming	D×L	Case Size
Series							

◆ DIMENSIONS

(mm)

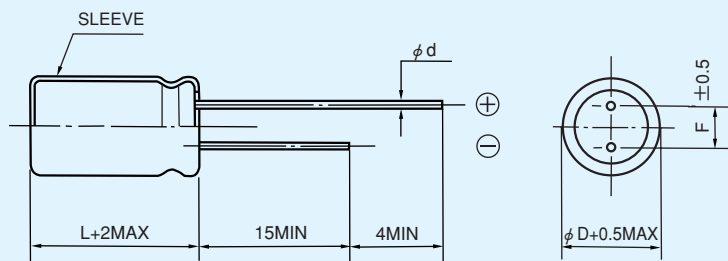

$\phi D$	10	12.5	16
$\phi d$	0.6		0.8
F	5.0		7.5

◆ STANDARD SIZE, RATED RIPPLE CURRENT

Size  $\phi D \times L$ (mm), Ripple Current (mA r.m.s./105°C, 100kHz)

WV (V.DC) Cap ( $\mu F$ )	200V (2D)		250V (2E)	
	Size	Ripple	Size	Ripple
10	10×16	300	10×16	300
22	10×16	360	10×20	500
33	10×20	500	12.5×20	600
47	12.5×20	660	12.5×25	720
68	12.5×25	760	16×25	920
100	16×25	1120		

WV (V.DC) Cap ( $\mu F$ )	350V (2V)		400V (2G)	
	Size	Ripple	Size	Ripple
2.2			10×16	160
3.3	10×16	180	10×16	180
4.7	10×16	220	10×16	220
6.8	10×16	220	10×16	220
10	10×20	280	10×20	280
22	12.5×20	350	12.5×25	430
33	12.5×25	430	16×25	640
47	16×25	660		