
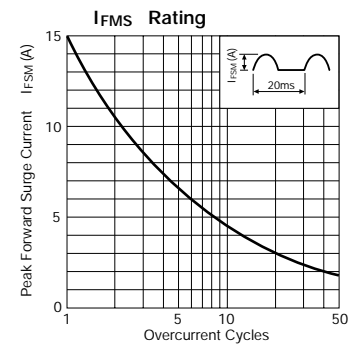






Fast-Recovery Rectifier Diodes

Parameter Type No.		Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)								Others		
		VRM (V)	IF (AV) (A)	IFSM (A)	TJ (°C)	Tstg (°C)	VF (V)		IR (μA)	IR (H) (μA)	trr ① (μs)		trr ② (μs)		Rth (j-ℓ)	Mass	Fig
				50Hz Half-cycle Sinewave Single Shot			max	IF (A)	VR=VRM max	VR=VRM Ta=100°C max		IF/IRP (mA)		IF/IRP (mA)	(°C/W)	(g)	
EU01Z		200	0.25	15	-40 to +150	2.5	0.25	10	150	0.4	10/10	0.18	10/20	20	0.2	Ⓐ	
EU01		400															
EU01A		600															
EU02Z		200	1.0	15		1.4	1.0	10	300	0.4	10/10	0.18	10/20	20	0.2		
EU02		400															
EU02A		600															
EU 1Z		200	0.25	15		2.5	0.25	10	150	0.4	10/10	0.18	10/20	17	0.3	Ⓑ	
EU 1		400															
EU 1A		600															




EU01 series

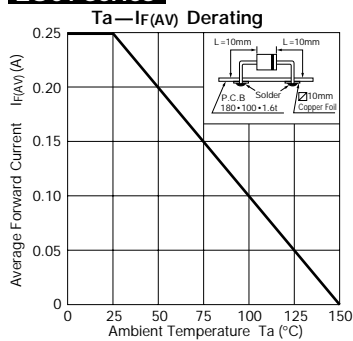

EU02 series

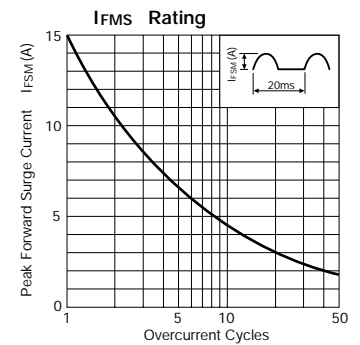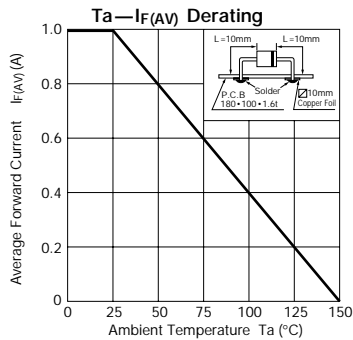

EU 1 series

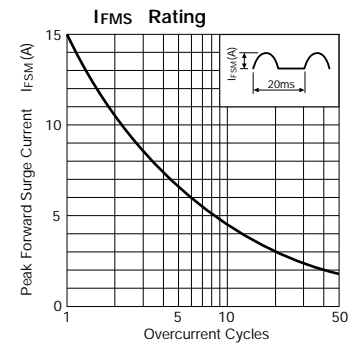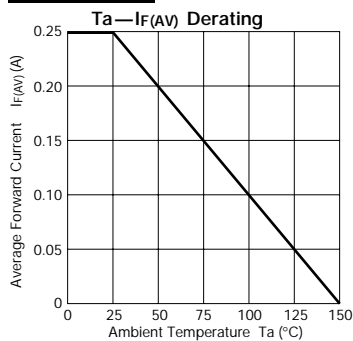

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

