
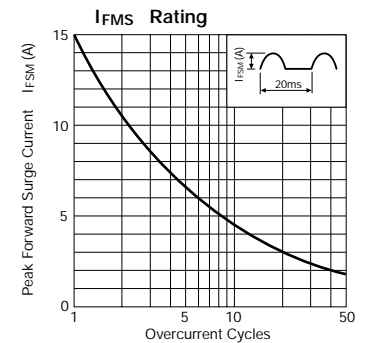
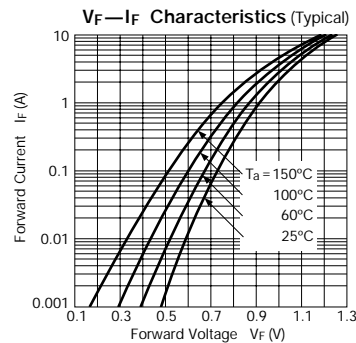





Fast-Recovery Rectifier Diodes

Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)									Others			
	VRM (V)	IF (AV) (A)	IFSM (A)	TJ (°C)	Tstg (°C)	VF (V)		IR (μA)	IR (H) (μA)	trr ① (μs)		trr ② (μs)		Rth (j-ℓ)	Mass	Fig.		
			50Hz Half-cycle Sinewave Single Shot			max	IF (A)	VR = VRM max	VR = VRM Ta = 100°C max		IF/IRP (mA)		IF/IRP (mA)	(°C/W)	(g)			
EU 2Z	200	1.0	15	-40 to +150														
EU 2	400																	
EU 2A	600																	
EU 2YX	100	1.2	25															
RF 1Z	200	0.6	15															
RF 1	400																	
RF 1A	600																	
RF 1B	800																	




EU 2 series

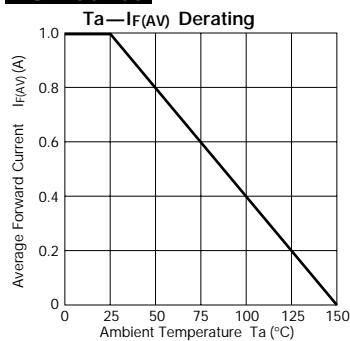

EU 2YX

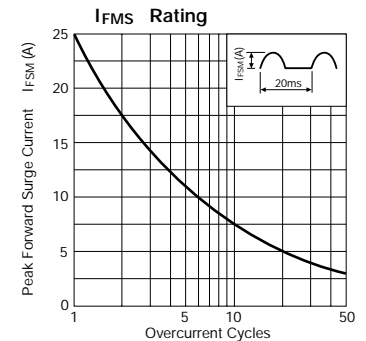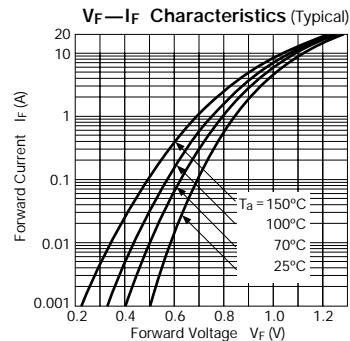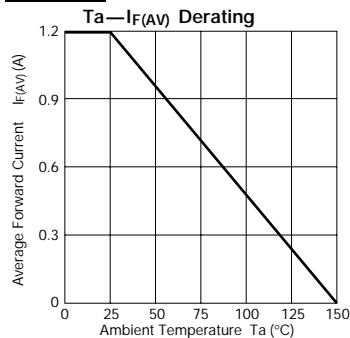

RF 1 series

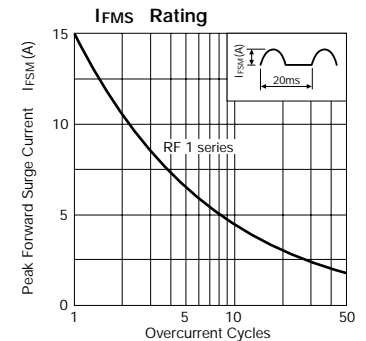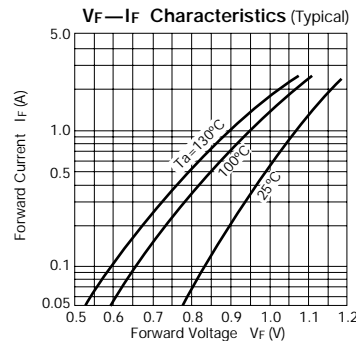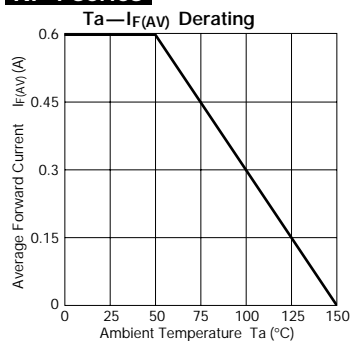

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

