
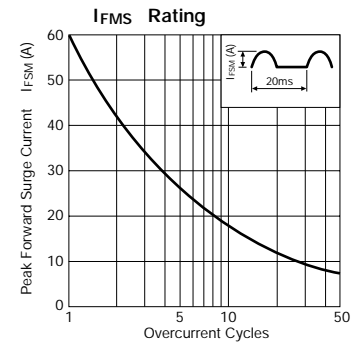
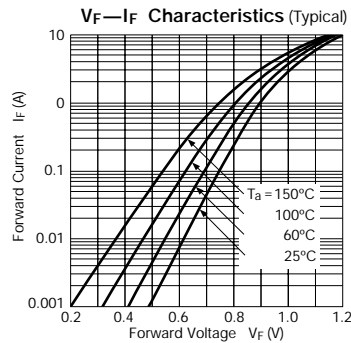





Damper Diodes (For TV)

Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)								Others						
	VRM (V)	IF (AV) (A)	IFSM (A)	Tj (°C)	Tstg (°C)	VF (V)		IR (μA)	IR (H) (μA)	trr① (μs)		trr② (μs)		Rth (j-ℓ)	Mass	Fig.				
			50Hz Half-cycle Sinewave Single Shot			max	IF (A)	VR=VRM max	VR=VRM Ta=100°C max		IF/IRP (mA)		IF/IRP (mA)	(°C/W)	(g)					
RH 10F	1500	0.8	60	-40 to +150		1.0	1.0	10	500	4.0	1.3	100/200	15.0	0.44	Ⓐ					
RH 2D	1300	1.0																12.0	0.6	Ⓑ
RH 2F	1500																			
RH 3F	1500	2.5	50			1.3	2.5	50		100/100				10.0	1.0	Ⓒ				
RH 3G	1600																			
RH 4F	1500						1.5		10	350					8.0	1.2	Ⓓ			




RH 10F, 2D, 2F



RH 3F, 3G

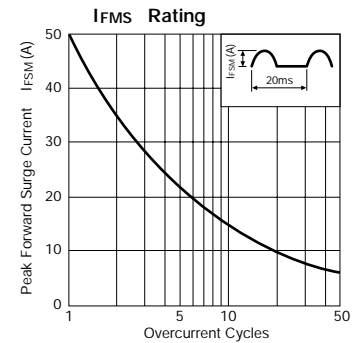

RH 4F

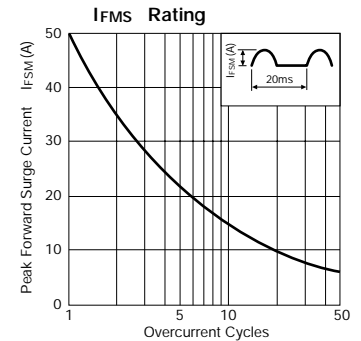

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

