
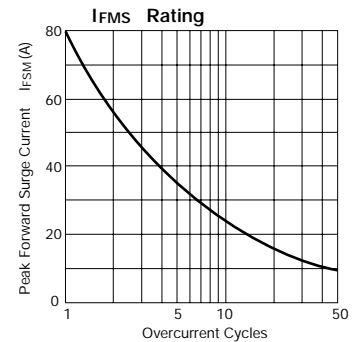
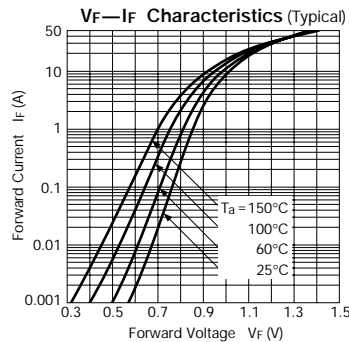





Rectifier Diodes

Parameter Type No.		Absolute Maximum Ratings					Electrical Characteristics (Ta = 25°C)					Others	
		V _{RM} (V)	I _F (AV) (A)	I _{FSM} (A)	T _J (°C)	Tstg (°C)	V _F (V)		I _R (μA)	I _R (H) (μA)	R _{th} (j-ℓ)	Mass	Fig.
				50Hz Half-cycle Sinewave Single Shot			max	I _F (A)	V _R = V _{RM} max	V _R = V _{RM} Ta = 100°C max	(°C/W)	(g)	
EM 2	400	1.2	80	-40 to +150	0.92	1.2	10	50	17	0.3	Ⓐ		
EM 2A	600												
EM 2B	800												
RM 1Z	200	1.0	50		0.95	1.0	5	50	15	0.4	Ⓑ		
RM 1	400												
RM 1A	600												
RM 1B	800	0.8	40		1.2								
RM 1C	1000												
RM 11A	600												
RM 11B	800	1.2	100		0.92	1.5	10	50					
RM 11C	1000												




EM 2 series

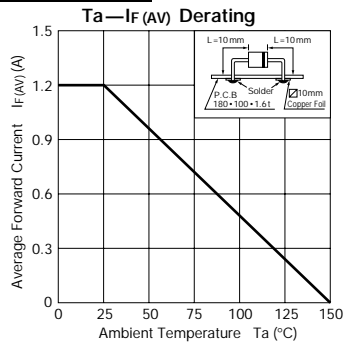

RM 1 series

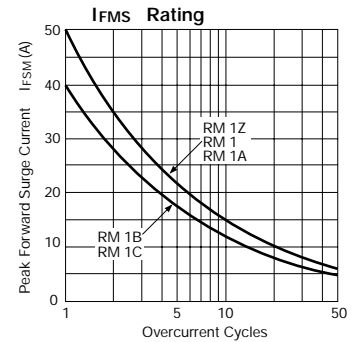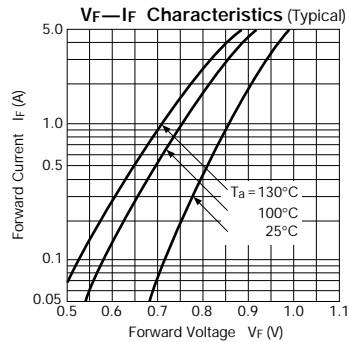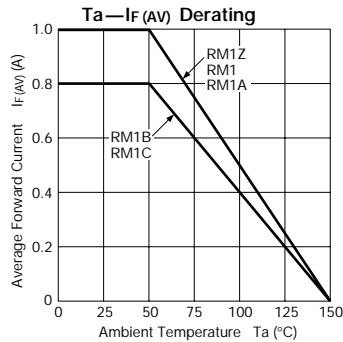

RM 11 series

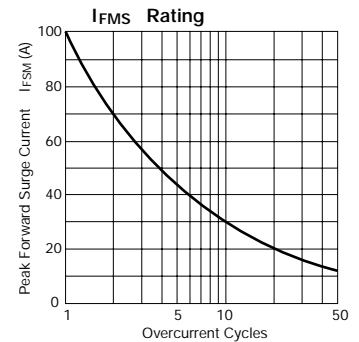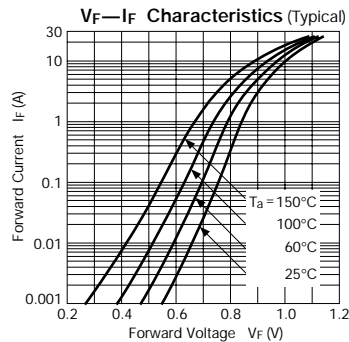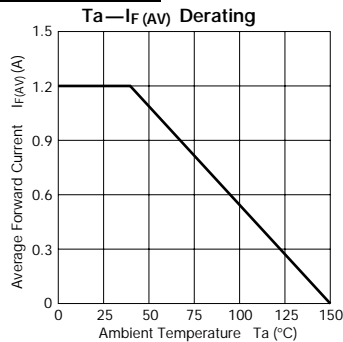

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

