
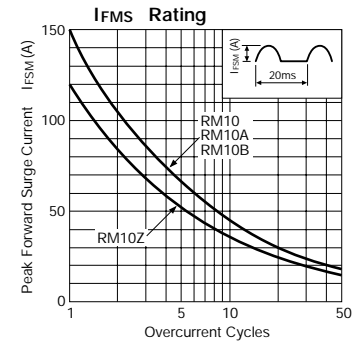






# Rectifier Diodes

Parameter  Type No.		Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)					Others	
		VRM (V)	IF (AV) (A)	IFSM (A)	Tj (°C)	Tstg (°C)	VF (V)		IR (μA)	IR (H) (μA)	Rth (j-ℓ)	Mass	Fig.
				50Hz Half-cycle Sinewave Single Shot			max	IF (A)	VR=VRM max	VR=VRM Ta=100°C max	(°C/W)	(g)	
RM 10Z	200	1.5	120	-40 to +150	0.91	1.5	10	50	15	0.4	Ⓐ		
RM 10	400	1.2	150										
RM 10A	600												
RM 10B	800												
RM 2Z	200	1.2	100	-40 to +150	0.91	1.5	10	50	12	0.6	Ⓑ		
RM 2	400												
RM 2A	600												
RM 2B	800												
RM 2C	1000												
RO 2Z	200	1.2	80	-40 to +150	0.92	1.5	10	50	12	0.61			
RO 2	400												
RO 2A	600												
RO 2B	800												
RO 2C	1000												




## RM 10 series



## RM 2 series

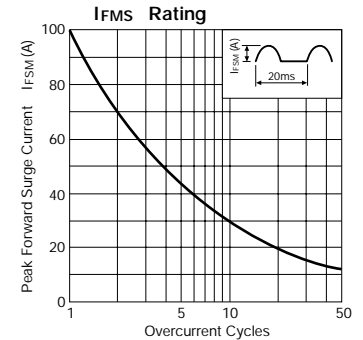

## RO 2 series

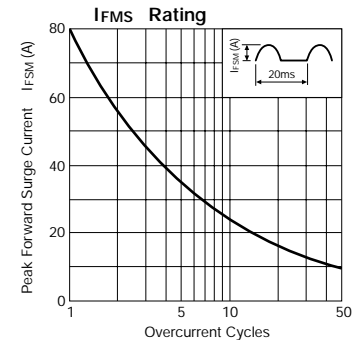

## External Dimensions

(Unit: mm)

Flammability:  
UL94V-0 or Equivalent

