

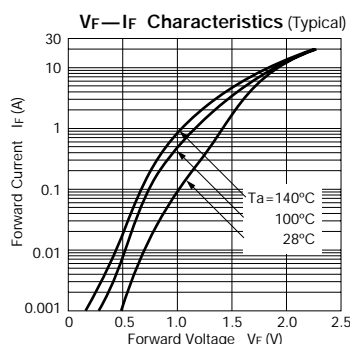





Damper Diodes (For Display)

Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)								Others			
	V _{RM} (V)	I _F (AV) (A) () Is with Heatsink	I _{FSM} (A) 50Hz Half-cycle Sinewave Single Shot	T _j (°C)	Tstg (°C)	V _F (V)	I _R (μA)	I _R (H) (μA)	t _{rr} ① (μs)	t _{rr} ② (μs)	Rth (j-ℓ)	Mass	Fig				
RU 4D	1300	1.2 (1.5)	50	-40 to +150		max	I _F (A)	V _R =V _{RM} max	V _R =V _{RM} Ta=100°C max		I _F /I _{RP} (mA)		I _F /I _{RP} (mA)		8.0	1.2	Ⓐ
RU 4DS																	
RP 3F	1500	2.0															




RU 4D



RU 4DS

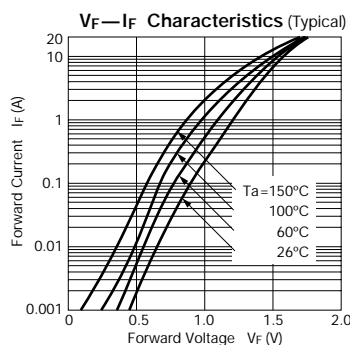

RP 3F

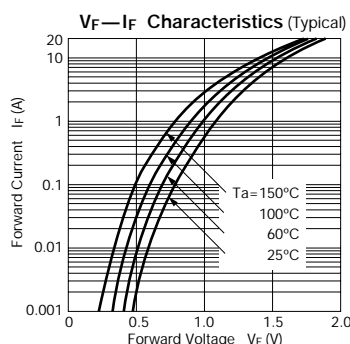

External Dimensions

(Unit: mm) (Full-mold)

Flammability:
UL94V-0 or Equivalent

