

SANYO

No.5044

2SC4869

NPN Epitaxial Planar Silicon Transistor

VHF to UHF Wide-Band Low-noise Amp
Applications**Features**

- Low noise : $NF = 1.2\text{dB typ (}f = 1\text{GHz)}$.
- High gain : $|S_{21e}|^2 = 15\text{dB typ (}f = 1\text{GHz)}$.
- High cutoff frequency : $f_T = 9.0\text{GHz typ}$.

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

			unit
Collector-to-Base Voltage	V_{CB0}	16	V
Collector-to-Emitter Voltage	V_{CE0}	8	V
Emitter-to-Base Voltage	V_{EB0}	1.5	V
Collector Current	I_C	50	mA
Collector Dissipation	P_C	200	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics at $T_a = 25^\circ\text{C}$

			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = 10\text{V}, I_E = 0$			1.0	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 1\text{V}, I_C = 0$			10	μA
DC Current Gain	h_{FE}	$V_{CE} = 5\text{V}, I_C = 15\text{mA}$	60※		270※	
Gain-Bandwidth Product	f_T	$V_{CE} = 5\text{V}, I_C = 15\text{mA}$		9.0		GHz
Output Capacitance	C_{ob}	$V_{CB} = 10\text{V}, f = 1\text{MHz}$		0.6	1.1	pF
Forward Transfer Gain	$ S_{21e} ^2$	$V_{CE} = 5\text{V}, I_C = 15\text{mA}, f = 1\text{GHz}$	12	15		dB
Noise Figure	NF	$V_{CE} = 5\text{V}, I_C = 5\text{mA}, f = 1\text{GHz}$		1.2	2.5	dB


※ : The 2SC4869 is classified by 15mA h_{FE} as follows :

60	3	120	90	4	180	135	5	270
----	---	-----	----	---	-----	-----	---	-----








Marking : GN

 h_{FE} rank : 3, 4, 5**Package Dimensions 2110A**

(unit : mm)

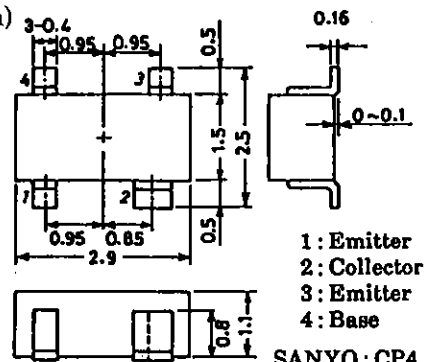
**SANYO Electric Co., Ltd. Semiconductor Business Headquarters**

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

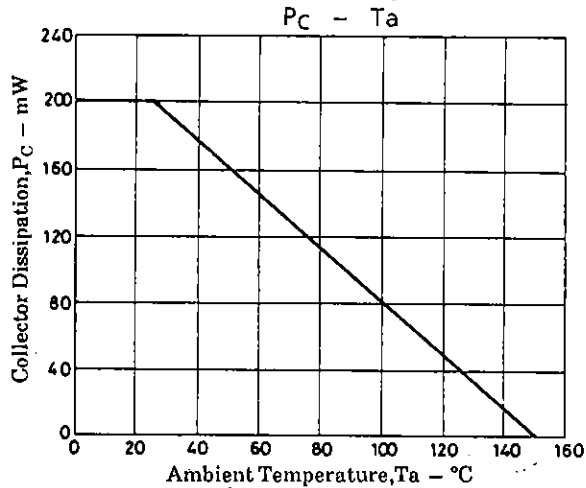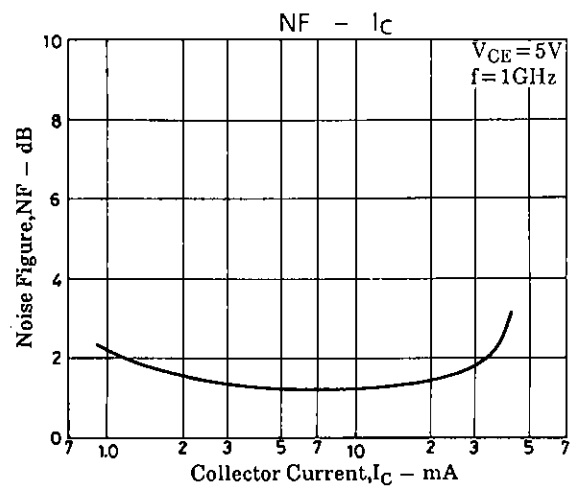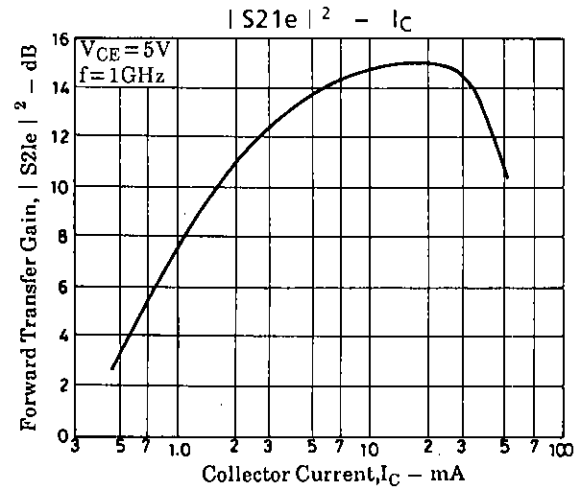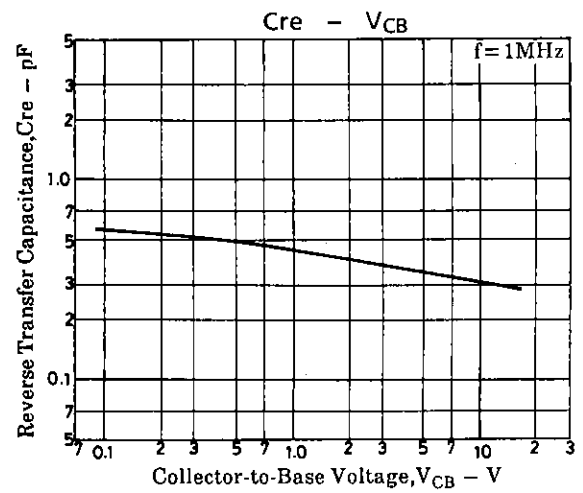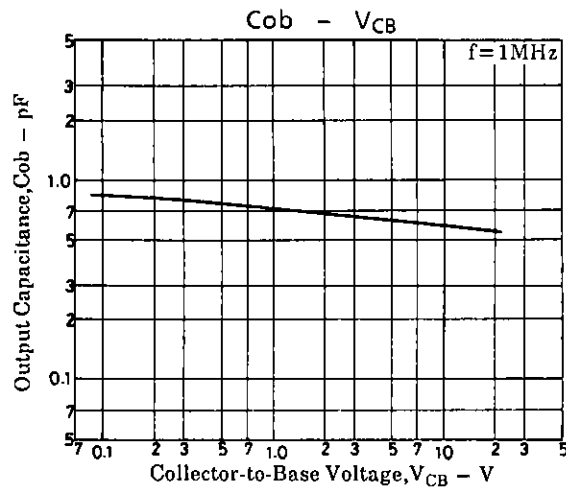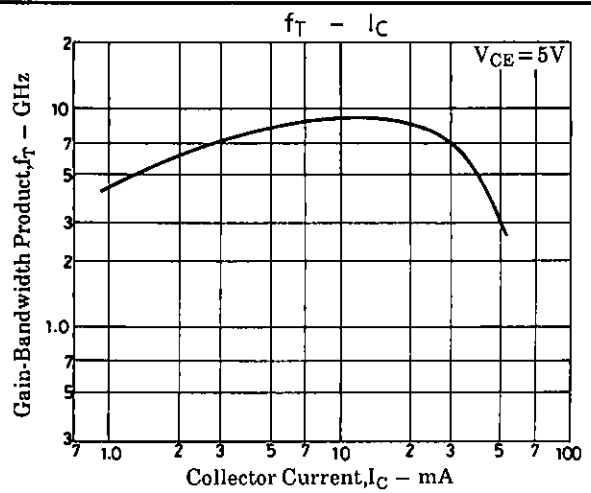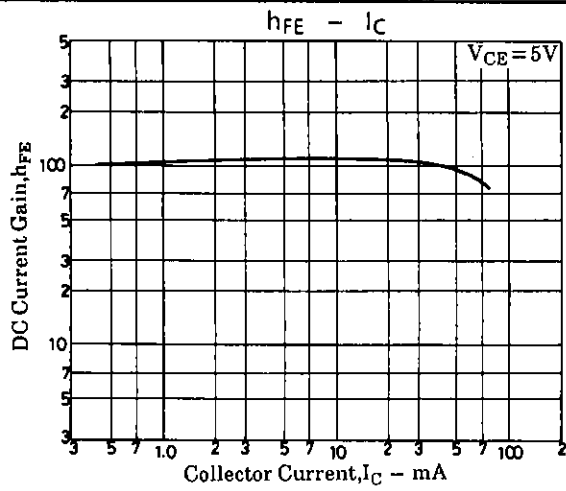


S Parameter


f = 200 to 2000MHz (200MHz step)

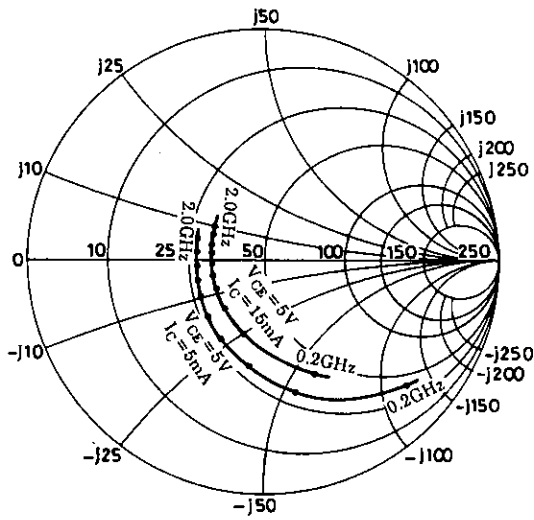


f = 200 to 2000MHz (200MHz step)

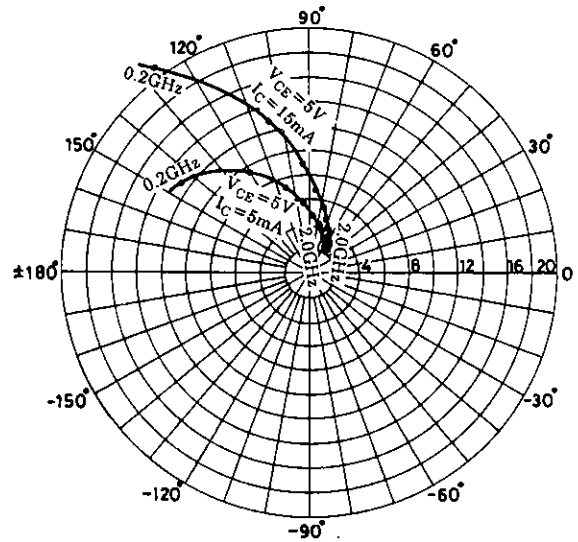

f = 200 to 2000MHz (200MHz step)

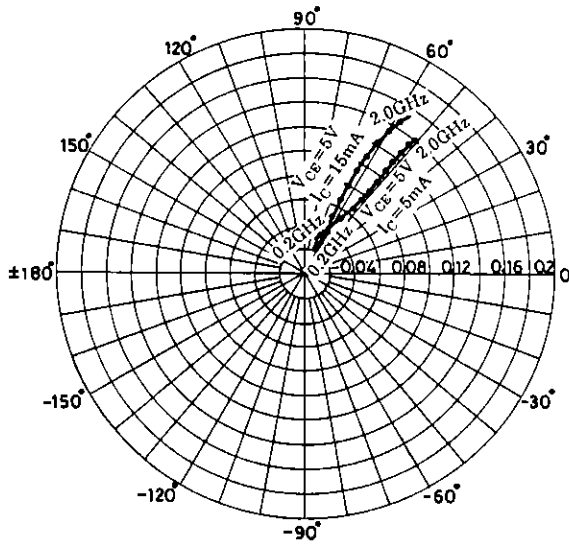

f = 200 to 2000MHz (200MHz step)

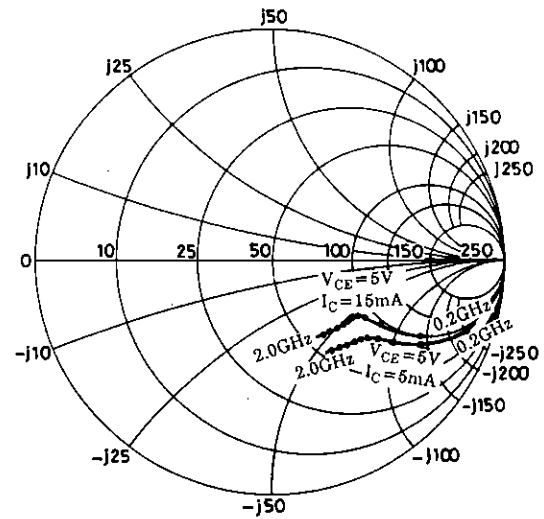

S Parameter (Common emitter)

 $V_{CE}=5V, I_C=5mA, Z_0=50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
200	0.782	-43.7	12.681	144.2	0.034	68.1	0.883	-19.9
400	0.591	-76.4	9.601	120.2	0.054	56.7	0.727	-29.9
600	0.467	-100.3	7.329	105.2	0.066	52.9	0.624	-34.5
800	0.393	-119.8	5.828	94.1	0.076	51.8	0.564	-37.4
1000	0.346	-135.3	4.831	85.6	0.090	51.8	0.532	-40.1
1200	0.322	-150.3	4.109	78.1	0.095	52.2	0.513	-42.5
1400	0.304	-163.6	3.585	71.7	0.106	52.2	0.499	-45.4
1600	0.299	-175.3	3.175	65.2	0.116	52.2	0.487	-49.0
1800	0.296	-173.4	2.873	59.8	0.126	52.0	0.477	-52.7
2000	0.301	-162.9	2.618	54.1	0.135	51.5	0.472	-57.0

 $V_{CE}=5V, I_C=15mA, Z_0=50\Omega$

Freq (MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
200	0.525	-69.3	20.888	126.3	0.027	64.4	0.710	-28.0
400	0.347	-106.8	12.787	104.6	0.040	62.3	0.540	-32.0
600	0.281	-131.5	8.978	93.2	0.053	63.6	0.472	-32.8
800	0.251	-150.6	6.897	85.1	0.067	64.2	0.442	-34.3
1000	0.240	-164.7	5.584	78.6	0.080	64.0	0.428	-37.1
1200	0.235	-177.5	4.715	72.6	0.094	63.8	0.421	-39.6
1400	0.237	-172.0	4.090	67.2	0.108	62.7	0.414	-42.9
1600	0.242	-163.7	3.615	62.0	0.122	61.4	0.406	-47.1
1800	0.251	-154.1	3.240	57.2	0.135	59.9	0.400	-51.3
2000	0.264	-145.5	2.943	52.3	0.147	58.0	0.398	-56.0

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.